
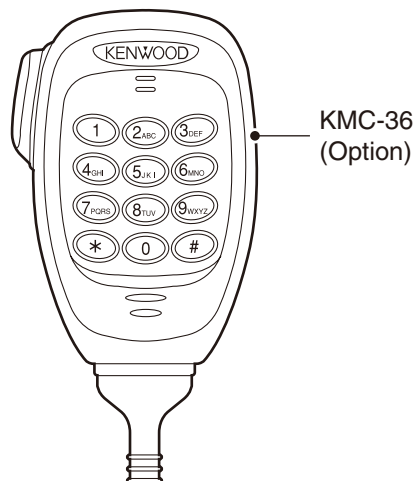


KENWOOD

SERVICE MANUAL

UHF DIGITAL TRANSCEIVER

NX-800, NX-800H

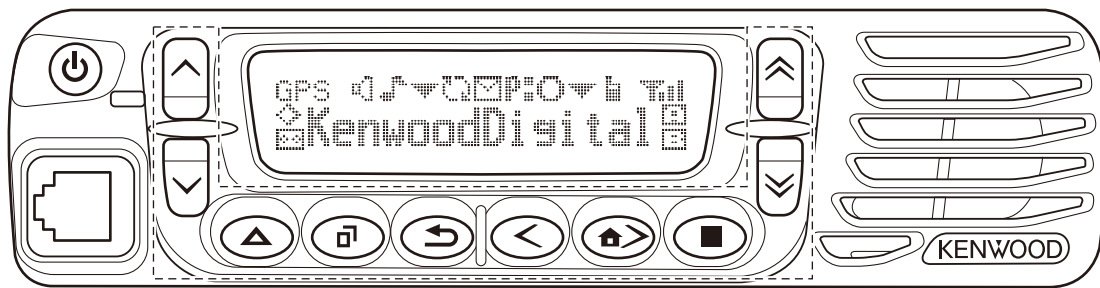

KMC-36
(Option)

SUPPLEMENT

This service manual has been revised due to the modification of the Mixer IC.
This service manual applies to products with B2801161 (except B2801431 to B2801544) or subsequent serial number. Refer to the NX-700/700H service manual (B51-8822-00) for any information which has not been covered in this service manual.

This product complies with the **RoHS** directive for the European market.



This product uses Lead Free solder.

NX-800/800H

CONTENTS

PARTS LIST	3
ADJUSTMENT	
NX-800/800H (K,K2) Receiver Section	20
NX-800H (K3) Receiver Section	21
PC BOARD	
NX-800/800H (K,K2): TX-RX UNIT (X57-8900-XX, XC1-0990-10)	22
NX-800H (K3): TX-RX UNIT (X57-8900-18)	28
BLOCK DIAGRAM	
NX-800/800H (K,K2): TX-RX UNIT (X57-8900-XX, XC1-0990-10)	34
NX-800H (K3): TX-RX UNIT (X57-8900-18)	36
APPENDIX (SCHEMATIC DIAGRAM X57-8900-XX, XC1-0990-10: NX-800/800H (K,K2))	
APPENDIX (SCHEMATIC DIAGRAM X57-8900-18: NX-800H (K3))	

Document Copyrights

Copyright 2015 by JVC KENWOOD Corporation. All rights reserved.

No part of this manual may be reproduced, translated, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, for any purpose without the prior written permission of JVC KENWOOD Corporation.

Disclaimer

While every precaution has been taken in the preparation of this manual, JVC KENWOOD Corporation assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein. JVC KENWOOD Corporation reserves the right to make changes to any products herein at any time for improvement purposes.

Firmware Copyrights

The title to and ownership of copyrights for firmware embedded in KENWOOD product memories are reserved for JVC KENWOOD Corporation. Any modifying, reverse engineering, copy, reproducing or disclosing on an Internet website of the firmware is strictly prohibited without prior written consent of JVC KENWOOD Corporation. Furthermore, any reselling, assigning or transferring of the firmware is also strictly prohibited without embedding the firmware in KENWOOD product memories.

Transceivers containing AMBE+2™ Vocoder:


The AMBE+2™ voice coding technology is embedded in the firmware under the license of Digital Voice Systems, Inc.

PARTS LIST

CAPACITORS


$\frac{C}{1} \frac{C}{2} \frac{45}{3} \frac{TH}{4} \frac{1H}{5} \frac{220}{6} \frac{J}{7}$

- 1 = Type ... ceramic, electrolytic, etc.
- 2 = Shape ... round, square, etc.
- 3 = Temp. coefficient
- 4 = Voltage rating
- 5 = Value
- 6 = Tolerance



• Capacitor value

- 010 = 1pF
- 100 = 10pF
- 101 = 100pF
- 102 = 1000pF = 0.001μF
- 103 = 0.01μF



• Temperature coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm/°C	±30	±60	±120	±250	±500

Example : CC45TH = -470±60ppm/°C

• Tolerance (More than 10pF)

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	±0.25	±0.5	±2	±5	±10	±20	+40 -20	+80 -20	+100 -0	More than 10μF : -10~+50 Less than 4.7μF : -10~+75

(Less than 10pF)

Code	B	C	D	F	G
(pF)	±0.1	±0.25	±0.5	±1	±2

• Voltage rating

2nd word \ 1st word	A	B	C	D	E	F	G	H	J	K	V
0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	-
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	-
3	1000	1250	1600	2000	2500	2150	4000	5000	6300	8000	-

• Chip capacitors


(EX) $\frac{C}{1} \frac{C}{2} \frac{73}{3} \frac{F}{4} \frac{SL}{5} \frac{1H}{6} \frac{000}{7} \frac{J}{8}$
(Chip) (CH, RH, UJ, SL)

(EX) $\frac{C}{1} \frac{K}{2} \frac{73}{3} \frac{F}{4} \frac{F}{5} \frac{1H}{6} \frac{000}{7} \frac{Z}{8}$
(Chip) (B, F)

Refer to the table above.

- 1 = Type
- 2 = Shape
- 3 = Dimension
- 4 = Temp. coefficient
- 5 = Voltage rating
- 6 = Value
- 7 = Tolerance

• Dimension



Chip capacitor

Code	L	W	T
Empty	5.6±0.5	5.0±0.5	Less than 2.0
A	4.5±0.5	3.2±0.4	Less than 2.0
B	4.5±0.5	2.0±0.3	Less than 2.0
C	4.5±0.5	1.25±0.2	Less than 1.25
D	3.2±0.4	2.5±0.3	Less than 1.5
E	3.2±0.2	1.6±0.2	Less than 1.25
F	2.0±0.3	1.25±0.2	Less than 1.25
G	1.6±0.2	0.8±0.2	Less than 1.0
H	1.0±0.05	0.5±0.05	0.5±0.05

Chip resistor

Code	L	W	T
E	3.2±0.2	1.6±0.2	1.0
F	2.0±0.3	1.25±0.2	1.0
G	1.6±0.2	0.8±0.2	0.5±0.1
H	1.0±0.05	0.5±0.05	0.35±0.05

• Rating wattage

Code	Wattage	Code	Wattage	Code	Wattage
1J	1/16W	2C	1/6W	3A	1W
2A	1/10W	2E	1/4W	3D	2W
2B	1/8W	2H	1/2W		

RESISTORS

• Chip resistor (Carbon)

(EX) $\frac{R}{1} \frac{D}{2} \frac{73}{3} \frac{E}{4} \frac{B}{5} \frac{2B}{6} \frac{000}{7} \frac{J}{8}$
(Chip) (B, F)

• Carbon resistor (Normal type)

(EX) $\frac{R}{1} \frac{D}{2} \frac{14}{3} \frac{B}{4} \frac{B}{5} \frac{2C}{6} \frac{000}{7} \frac{J}{8}$

- 1 = Type
- 2 = Shape
- 3 = Dimension
- 4 = Temp. coefficient
- 5 = Rating wattage
- 6 = Value
- 7 = Tolerance

NX-800/800H

PARTS LIST

△ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia
Y : PX (Far East, Hawaii)
C : China

K : USA
T : England
X : Australia
P : Canada
E : Europe
M : Other Areas

TX-RX UINT (X57-8900-XX)

TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation
TX-RX UINT (X57-8900-XX) -10: K -11: HK -13: HK2 -18: HK3				
TX-RX UINT (XC1-0990-10): K2				
C1		CK73HXROJ105K	CHIP C	1.0UF K
C2		CC73HCH1H101J	CHIP C	100PF J
C3		CK73HBB1H471K	CHIP C	470PF K
C4		CK73HBB1A104K	CHIP C	0.1UF K
C5		CK73HBB1E103K	CHIP C	0.01UF K
C6		CC73HCH1H101J	CHIP C	100PF J
C7		CC73HCH1H180J	CHIP C	18PF J
C8		CC73HCH1H080B	CHIP C	8.0PF B
C8		CC73HCH1H100B	CHIP C	10PF B
C8		CC73HCH1H120G	CHIP C	12PF G
C9		CK73HBB1E103K	CHIP C	0.01UF K
C10		CC73HCH1H390J	CHIP C	39PF J
C11		CK73FB1A106K	CHIP C	10UF K
C12		CC73HCH1H080B	CHIP C	8.0PF B
C12		CC73HCH1H120G	CHIP C	12PF G
C13		CK73HBB1E103K	CHIP C	0.01UF K
C14		CK73GB1E105K	CHIP C	1.0UF K
C15		CC73HCH1H101J	CHIP C	100PF J
C16		CK73HBB1E103K	CHIP C	0.01UF K
C17		CK73HBB1E103K	CHIP C	0.01UF K
C18		CC73HCH1H101J	CHIP C	100PF J
C19		CC73HCH1H101J	CHIP C	100PF J
C20		CC73HCH1H101J	CHIP C	100PF J
C21		CC73HCH1H101J	CHIP C	100PF J
C22		CC73HCH1H101J	CHIP C	100PF J
C23		CC73HCH1H101J	CHIP C	100PF J
C24		CK73HBB1A104K	CHIP C	0.1UF K
C25		CC73HCH1H101J	CHIP C	100PF J
C26		CC73HCH1H101J	CHIP C	100PF J
C27		CK73HBB1A104K	CHIP C	0.1UF K
C28		CC73HCH1H101J	CHIP C	100PF J
C29		CC73HCH1H101J	CHIP C	100PF J
C31		CC73HCH1H101J	CHIP C	100PF J
C32		CS77MA1VR15M	CHIP TNTL	0.15UF 35WV
C33		CC73HCH1H330J	CHIP C	33PF J
C34		CC73HCH1H470J	CHIP C	47PF J
C35		CS77ABE1D100M	CHIP TNTL	10UF 20WV
C36		CC73HCH1H050B	CHIP C	5.0PF B
C36		CC73HCH1H070B	CHIP C	7.0PF B
C36		CC73HCH1H080B	CHIP C	8.0PF B
C37		C93-1906-05	CHIP TNTL	0.047UF 35WV
C38		CC730AD1H104J	CHIP C	0.1UPF J
C39		CC73HCH1H030B	CHIP C	3.0PF B
C41		CK73HBB1H471K	CHIP C	470PF K
C43		CK73HBB1H471K	CHIP C	470PF K
C44		CC73HCH1H101J	CHIP C	100PF J
C45		CC73HCH1H101J	CHIP C	100PF J
C46		CC73HCH1H050B	CHIP C	5.0PF B
C46		CC73HCH1H070B	CHIP C	7.0PF B
C46		CC73HCH1H100B	CHIP C	10PF B
C46		CC73HCH1H330J	CHIP C	33PF J
C46		CC73HCH1H080B	CHIP C	8.0PF B
C46		CC73HCH1H120G	CHIP C	12PF G
C46		CC73HCH1H150G	CHIP C	15PF G
C46		CC73HCH1H180G	CHIP C	18PF G
C46		CC73HCH1H151J	CHIP C	150PF J
C46		CC73HCH1H151J	CHIP C	150PF J
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CK73HBB1A104K	CHIP C	0.1UF K
C46		CK73HXROJ105K	CHIP C	1.0UF K
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CC73HCH1H120G	CHIP C	12PF G
C46		CC73HCH1H180G	CHIP C	18PF G
C46		CC73HCH1H270G	CHIP C	27PF G
C46		CC73HCH1H150G	CHIP C	15PF G
C46		CC73HCH1H200G	CHIP C	20PF G
C46		CC73HCH1H470G	CHIP C	47PF G
C46		CC73HCH1HR75B	CHIP C	0.75PF B
C46		CC73HCH1H0R5B	CHIP C	0.5PF B
C46		CC73HCH1HR75B	CHIP C	0.75PF B
C46		CC73HCH1H070B	CHIP C	7.0PF B
C46		CC73HCH1H090B	CHIP C	9.0PF B
C46		CK73FB1A106K	CHIP C	10UF K
C46		CC73HCH1H060B	CHIP C	6.0PF B
C46		CC73HCH1H070B	CHIP C	7.0PF B
C46		CC73HCH1H050B	CHIP C	5.0PF B
C46		CC73HCH1H060B	CHIP C	6.0PF B
C46		CC73HCH1H070B	CHIP C	7.0PF B
C46		CC73HCH1H040B	CHIP C	4.0PF B
C46		CC73HCH1H050B	CHIP C	5.0PF B
C46		CC73HCH1H060B	CHIP C	6.0PF B
C46		CC73HCH1H050B	CHIP C	5.0PF B
C46		CC73HCH1H060B	CHIP C	6.0PF B
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CK73GB1E105K	CHIP C	1.0UF K
C46		CC73HCH1H030B	CHIP C	3.0PF B
C46		CC73HCH1H040B	CHIP C	4.0PF B
C46		CC73HCH1H050B	CHIP C	5.0PF B
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CC73HCH1H0R5B	CHIP C	0.5PF B
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CC73HCH1H070B	CHIP C	7.0PF B
C46		CK73HBB1H471K	CHIP C	470PF K
C46		CC73HCH1H100B	CHIP C	10PF B
C46		CC73HCH1H330J	CHIP C	33PF J

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation		
C83		CK73HBB1H471K	CHIP C	470PF	K	C136	CK73FB1H471K	CHIP C	470PF	K	
C84		CK73HBB1H471K	CHIP C	470PF	K	C138	CS77MA1A6R8M	CHIP TNL	6.8UF	10WV	
C85		CK73HBB1A104K	CHIP C	0.1UF	K	C141	CC73HCH1H220J	CHIP C	22PF	J	
C86		CC73HCH1H070B	CHIP C	7.0PF	B	C142	CC73HCH1H470J	CHIP C	47PF	J	
C88		CK73HBB1E103K	CHIP C	0.01UF	K	C143	CC73GCH1H220J	CHIP C	22PF	J	K2
C90		CK73HBB1E103K	CHIP C	0.01UF	K	C145	CC73HCH1H101J	CHIP C	100PF	J	
C91		CK73HBB1E103K	CHIP C	0.01UF	K	C146	CC73GCH1H100D	CHIP C	10PF	D	K2
C92		CK73HBB1E103K	CHIP C	0.01UF	K	C147	CK73HBB1H471K	CHIP C	470PF	K	
C98		CK73HBB1H471K	CHIP C	470PF	K	C150	CE32BY1E470M	CHIP EL	47UF	25WV	
C101		CK73HBB1H102K	CHIP C	1000PF	K	C151	CC73GCH1H101J	CHIP C	100PF	J	K2
C101		CK73HBB1H471K	CHIP C	470PF	K	C152	CC73HCH1H101J	CHIP C	100PF	J	
C102		CK73HBB1H471K	CHIP C	470PF	K	C153	CC73HCH1H101J	CHIP C	100PF	J	
C103		CK73HBB1E103K	CHIP C	0.01UF	K	C155	CC73HCH1H220J	CHIP C	22PF	J	
C104		CC73HCH1H101J	CHIP C	100PF	J	C156	CC73HCH1H220J	CHIP C	22PF	J	
C104		CK73HBB1H471K	CHIP C	470PF	K	C157	CC73HCH1H101J	CHIP C	100PF	J	
C105		CC73HCH1H101J	CHIP C	100PF	J	C158	CK73HBB1H471K	CHIP C	470PF	K	
C105		CK73HBB1H471K	CHIP C	470PF	K	C162	CC73FCH1H020C	CHIP C	2.0PF	C	K,HK
C106		CC73HCH1H101J	CHIP C	100PF	J	C162	CC73FCH1H050B	CHIP C	5.0PF	B	K2,HK2
C106		CK73HBB1H471K	CHIP C	470PF	K	C162	CC73FCH1H150G	CHIP C	5.0PF	G	HK3
C107		CC73HCH1H101J	CHIP C	100PF	J	C164	CC73GCH1H0R5B	CHIP C	0.5PF	B	
C107		CK73HBB1H471K	CHIP C	470PF	K	C165	CC73GCH1H010B	CHIP C	1.0PF	B	K,HK3
C108		CK73FB1E475K	CHIP C	4.7UF	K	C165	CC73GCH1H030B	CHIP C	3.0PF	B	K2,HK2,HK
C109		CC73HCH1H060D	CHIP C	6.0PF	D	C166	CC73HCH1H101J	CHIP C	100PF	J	
C109		CC73HCH1H090B	CHIP C	9.0PF	B	C169	CC73HCH1H101J	CHIP C	100PF	J	K,K2,HK2,HK
C110		CC73HCH1H101J	CHIP C	100PF	J	C169	CK73HBB1H471K	CHIP C	470PF	K	HK3
C110		CK73HBB1H471K	CHIP C	470PF	K	C170	CC73GCH1H0R3B	CHIP C	0.3PF	B	K2
C111		CC73HCH1H101J	CHIP C	100PF	J	C170	CC73GCH1H0R5B	CHIP C	0.5PF	B	K,HK2,HK3,HK
C111		CK73HBB1H471K	CHIP C	470PF	K	C171	CC73GCH1H010B	CHIP C	1.0PF	B	HK3
C112		CC73HCH1H101J	CHIP C	100PF	J	C171	CC73GCH1H020B	CHIP C	2.0PF	B	HK
C112		CK73HBB1H471K	CHIP C	470PF	K	C171	CC73GCH1H030B	CHIP C	3.0PF	B	K,HK2
C115		CC73HCH1H101J	CHIP C	100PF	J	C171	CC73GCH1H040B	CHIP C	4.0PF	B	K2
C115		CK73HBB1H471K	CHIP C	470PF	K	C172	CC73HCH1H101J	CHIP C	100PF	J	
C116		CC73HCH1H101J	CHIP C	100PF	J	C174	C93-0550-05	CHIP C	3.0PF	C	HK3
C116		CK73HBB1H471K	CHIP C	470PF	K	C174	C93-0552-05	CHIP C	2.0PF	C	HK
C117		CC73HCH1H101J	CHIP C	100PF	J	C174	C93-0553-05	CHIP C	3.0PF	C	K,HK2
C117		CK73HBB1H471K	CHIP C	470PF	K	C174	C93-0554-05	CHIP C	4.0PF	D	K2
C118		CC73HCH1H060D	CHIP C	6.0PF	D	C175	CC73HCH1H101J	CHIP C	100PF	J	K,K2,HK2,HK
C118		CC73HCH1H080B	CHIP C	8.0PF	B	C175	CK73HBB1H471K	CHIP C	470PF	K	HK3
C118		CC73HCH1H100B	CHIP C	10PF	B	C177	C93-0556-05	CHIP C	6.0PF	D	K,K2
C119		CC73HCH1H050B	CHIP C	5.0PF	B	C178	CC73GCH1H0R5B	CHIP C	0.5PF	B	
C119		CC73HCH1H080B	CHIP C	8.0PF	B	C179	CC73GCH1H010B	CHIP C	1.0PF	B	HK2
C120		CK73HBB1H471K	CHIP C	470PF	K	C179	CC73GCH1H020B	CHIP C	2.0PF	B	HK
C121		CC73HCH1H020B	CHIP C	2.0PF	B	C179	CC73GCH1H030B	CHIP C	3.0PF	B	K,K2
C121		CC73HCH1H080B	CHIP C	8.0PF	B	C179	CC73GCH1H040B	CHIP C	4.0PF	B	HK3
C122		CC73HCH1H060B	CHIP C	6.0PF	B	C180	CC73HCH1H101J	CHIP C	100PF	J	
C122		CC73HCH1H080B	CHIP C	8.0PF	B	C181	CC73HCH1H101J	CHIP C	100PF	J	K,K2,HK2,HK
C123		CC73HCH1H220J	CHIP C	22PF	J	C181	CK73HBB1H471K	CHIP C	470PF	K	HK3
C125		CK73HBB1H471K	CHIP C	470PF	K	C184	CM73F2H010C	CHIP C	1.0PF	C	K,K2
C127		CK73HBB1H471K	CHIP C	470PF	K	C185	CM73F2H040C	CHIP C	4.0PF	C	HK
C128		CC73HCH1H470J	CHIP C	47PF	J	C185	CM73F2H060D	CHIP C	6.0PF	D	K,K2,HK2
C131		CC73HCH1H101J	CHIP C	100PF	J	C185	CM73F2H120J	CHIP C	12PF	J	HK3
C132		CK73HBB1H471K	CHIP C	470PF	K	C186	CM73F2H121J	CHIP C	120PF	J	
C133		CC73HCH1H220J	CHIP C	22PF	J	C187	C93-0553-05	CHIP C	3.0PF	C	K
C134		CK73HBB1H471K	CHIP C	470PF	K	C187	C93-0555-05	CHIP C	5.0PF	C	K2
C135		CC73HCH1H101J	CHIP C	100PF	J	C187	CM73F2H020C	CHIP C	2.0PF	C	HK3

NX-800/800H

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation		
C187		CM73F2H040C	CHIP C	4.0PF	C	HK2	C245	CK73HBB1H471K	CHIP C	470PF	K
C187		CM73F2H050C	CHIP C	5.0PF	C	HK	C246	CK73HBB1E103K	CHIP C	0.01UF	K
C188		CM73F2H080D	CHIP C	8.0PF	D	K, HK	C248	CK73HBB1E103K	CHIP C	0.01UF	K
C188		CM73F2H090D	CHIP C	9.0PF	D	K2, HK2	C249	CC73HCH1H2R5B	CHIP C	2.5PF	B
C188		CM73F2H150J	CHIP C	15PF	J	HK3	C252	CC73HCH1H0R5B	CHIP C	0.5PF	B
C189		CM73F2H070D	CHIP C	7.0PF	D	K	C254	CC73HCH1H2R5B	CHIP C	2.5PF	B
C189		CM73F2H080D	CHIP C	8.0PF	D	K2	C256	CC73HCH1H220G	CHIP C	22PF	G
C189		CM73F2H090D	CHIP C	9.0PF	D	HK	C257	CK73HBB1H471K	CHIP C	470PF	K
C189		CM73F2H120J	CHIP C	12PF	J	HK2	C258	CK73HBB1H471K	CHIP C	470PF	K
C189		CM73F2H150J	CHIP C	15PF	J	HK3	C259	CK73HBB1E103K	CHIP C	0.01UF	K
C190		C93-0555-05	CHIP C	5.0PF	C	K	C260	CK73HBB1E103K	CHIP C	0.01UF	K
C190		CM73F2H030C	CHIP C	3.0PF	C	HK	C261	CC73HCH1H101J	CHIP C	100PF	J
C190		CM73F2H060D	CHIP C	6.0PF	D	HK2	C262	CK73HBB1E103K	CHIP C	0.01UF	K
C190		CM73F2H070D	CHIP C	7.0PF	D	K2, HK3	C264	CK73HBB1H471K	CHIP C	470PF	K
C193		CK73HBB1H471K	CHIP C	470PF	K	K, K2, HK2, HK	C265	CK73HBB1E103K	CHIP C	0.01UF	K
C194		CK73HBB1H471K	CHIP C	470PF	K		C266	CK73HBB1H102K	CHIP C	1000PF	K
C201		CK73HBB1E103K	CHIP C	0.01UF	K		C267	CC73HCH1H070B	CHIP C	7.0PF	B
C202		CK73HBB1A104K	CHIP C	0.1UF	K		C267	CC73HCH1H120G	CHIP C	12PF	G
C203		CK73HBB1A104K	CHIP C	0.1UF	K		C268	CK73HBB1E103K	CHIP C	0.01UF	K
C204		CK73HBB1A104K	CHIP C	0.1UF	K		C269	CK73HBB1H471K	CHIP C	470PF	K
C205		CK73HBB1A104K	CHIP C	0.1UF	K		C271	CC73HCH1H100B	CHIP C	10PF	B
C206		CC73HCH1H100B	CHIP C	10PF	B		C271	CC73HCH1H120G	CHIP C	12PF	G
C207		CK73HBB1E103K	CHIP C	0.01UF	K		C272	CC73HCH1H020B	CHIP C	2.0PF	B
C208		CK73HBB1E103K	CHIP C	0.01UF	K		C273	CC73HCH1H120G	CHIP C	12PF	G
C210		CK73HBB1A104K	CHIP C	0.1UF	K		C275	CC73HCH1H010B	CHIP C	1.0PF	B
C211		CC73HCH1H100B	CHIP C	10PF	B		C275	CC73HCH1H020B	CHIP C	2.0PF	B
C212		CK73HBB1A104K	CHIP C	0.1UF	K		C275	CC73HCH1H030B	CHIP C	3.0PF	B
C214		CC73HCH1H680J	CHIP C	68PF	J		C276	CC73HCH1H060B	CHIP C	6.0PF	B
C215		CC73HCH1H101J	CHIP C	100PF	J		C279	CC73HCH1H150G	CHIP C	15PF	G
C216		CC73HCH1H680J	CHIP C	68PF	J		C279	CC73HCH1H180G	CHIP C	18PF	G
C217		CK73HBB1A104K	CHIP C	0.1UF	K		C281	CK73HBB1H471K	CHIP C	470PF	K
C218		CK73GXRQJ475K	CHIP C	4.7UF	K		C282	CK73GB1E105K	CHIP C	1.0UF	K
C219		CK73GXRQJ475K	CHIP C	4.7UF	K		C283	CC73HCH1H080B	CHIP C	8.0PF	B
C220		CC73HCH1H470J	CHIP C	47PF	J		C283	CC73HCH1H100B	CHIP C	10PF	B
C221		CK73FB1A106K	CHIP C	10UF	K		C284	CK73HBB1H471K	CHIP C	470PF	K
C222		CK73HBB1E103K	CHIP C	0.01UF	K		C285	CC73HCH1H220G	CHIP C	22PF	G
C223		CK73HBB1E103K	CHIP C	0.01UF	K		C285	CC73HCH1H680J	CHIP C	68PF	J
C225		CK73HBB1A104K	CHIP C	0.1UF	K		C286	CC73HCH1H060B	CHIP C	6.0PF	B
C226		CK73FB1A106K	CHIP C	10UF	K		C286	CC73HCH1H070B	CHIP C	7.0PF	B
C227		CC73HCH1H820J	CHIP C	82PF	J		C287	CC73HCH1H050B	CHIP C	5.0PF	B
C228		CK73HBB1A104K	CHIP C	0.1UF	K		C288	CK73HBB1H471K	CHIP C	470PF	K
C229		CK73HBB1A104K	CHIP C	0.1UF	K		C289	CK73HBB1H102K	CHIP C	1000PF	K
C231		CK73HBB1E103K	CHIP C	0.01UF	K		C290	CC73HCH1H150G	CHIP C	15PF	G
C232		CK73HBB1A104K	CHIP C	0.1UF	K		C290	CC73HCH1H180G	CHIP C	18PF	G
C233		CK73HXRQJ105K	CHIP C	1.0UF	K		C290	CC73HCH1H680J	CHIP C	68PF	J
C234		CK73HBB1E103K	CHIP C	0.01UF	K	K, HK2, HK3, HK	C291	CC73HCH1H070B	CHIP C	7.0PF	B
C234		CK73HBB1E103K	CHIP C	0.01UF	K	K2	C291	CC73HCH1H100B	CHIP C	10PF	B
C236		CC73HCH1H470J	CHIP C	47PF	J		C292	CK73HBB1H471K	CHIP C	470PF	K
C237		CK73HBB1H471K	CHIP C	470PF	K		C293	CC73HCH1H080B	CHIP C	8.0PF	B
C238		CK73HBB1E103K	CHIP C	0.01UF	K		C293	CC73HCH1H100B	CHIP C	10PF	B
C239		CK73HBB1E103K	CHIP C	0.01UF	K		C294	CK73HBB1H471K	CHIP C	470PF	K
C240		CK73HBB1E103K	CHIP C	0.01UF	K		C295	CC73HCH1H150G	CHIP C	15PF	G
C242		CK73HBB1H471K	CHIP C	470PF	K		C295	CC73HCH1H180G	CHIP C	18PF	G
C243		CK73HBB1E103K	CHIP C	0.01UF	K		C295	CC73HCH1H680J	CHIP C	68PF	J
C244		CC73HCH1H470J	CHIP C	47PF	J		C296	CC73HCH1H050B	CHIP C	5.0PF	B

PARTS LIST

TX-RX UJINT (X57-8900-XX)
TX-RX UJINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
C296		CC73HCH1H060B	CHIP C	6.0PF B	HK3	C343	CK73HBB1A104K	CHIP C	0.1UF K
C296		CC73HCH1H070B	CHIP C	7.0PF B	K2,HK2	C344	CC73HCH1H101J	CHIP C	100PF J
C297		CC73HCH1H060B	CHIP C	6.0PF B	K,HK	C347	CK73HBB1H471K	CHIP C	470PF K
C297		CC73HCH1H080B	CHIP C	8.0PF B	K2,HK2	C348	CK73HBB1E103K	CHIP C	0.01UF K
C297		CC73HCH1H090B	CHIP C	9.0PF B	HK3	C358	CK73HB1H182K	CHIP C	1800F K
C298		CK73HBB1H471K	CHIP C	470PF K		C358	CK73HBB1H102K	CHIP C	1000PF K
C299		CC73HCH1H220G	CHIP C	22PF G	K,K2,HK2,HK	C361	CC73HCH1H101J	CHIP C	100PF J
C299		CC73HCH1H680J	CHIP C	68PF J	HK3	C364	CK73HBB1H102K	CHIP C	1000PF K
C301		CC73HCH1H050B	CHIP C	5.0PF B	HK3	C365	CK73HBB1H102K	CHIP C	1000PF K
C301		CC73HCH1H070B	CHIP C	7.0PF B	K,K2,HK2,HK	C366	CK73HBB1H102K	CHIP C	1000PF K
C302		CK73GB1H104K	CHIP C	0.10UF K		C401	CD04CK1E102M	ELECTRO	1000UF 25WV
C307		CK73HBB1H471K	CHIP C	470PF K		C403	CK73HBB1H471K	CHIP C	470PF K
C308		CK73HBB1H471K	CHIP C	470PF K		C405	CK73HBB1H471K	CHIP C	470PF K
C310		CC73HCH1H180G	CHIP C	18PF G	K2,HK2	C406	CK73HBB1H102K	CHIP C	1000PF K
C315		CC73HCH1H060B	CHIP C	6.0PF B	HK3	C409	CK73HBB1E103K	CHIP C	0.01UF K
C315		CC73HCH1H070B	CHIP C	7.0PF B	K,HK	C410	CK73GBB1H103K	CHIP C	1000PF K
C315		CC73HCH1H100B	CHIP C	10PF B	K2,HK2	C411	CK73HBB1H471K	CHIP C	470PF K
C316		CK73HBB1H471K	CHIP C	470PF K		C413	CK73GB1E105K	CHIP C	1.0UF K
C317		CC73HCH1H100B	CHIP C	10PF B	K,HK	C415	CK73HBB1H471K	CHIP C	470PF K
C317		CC73HCH1H220G	CHIP C	22PF G	K2,HK2	C417	CK73HBB1H471K	CHIP C	470PF K
C317		CC73HCH1H330G	CHIP C	33PF G	HK3	C419	CK73HBB1H102K	CHIP C	1000PF K
C318		CC73HCH1H030B	CHIP C	3.0PF B	K,K2,HK2,HK	C420	CK73HBB1A104K	CHIP C	0.1UF K
C318		CC73HCH1H040B	CHIP C	4.0PF B	HK3	C421	CK73GBB1H473K	CHIP C	0.047UF K
C319		CC73HCH1H030B	CHIP C	3.0PF B		C422	CK73FB1E475K	CHIP C	4.7UF K
C320		CK73HBB1H471K	CHIP C	470PF K		C424	CK73GB1E105K	CHIP C	1.0UF K
C321		CC73HCH1H040B	CHIP C	4.0PF B	K,HK	C425	CK73GB1H104K	CHIP C	0.10UF K
C321		CC73HCH1H060B	CHIP C	6.0PF B	K2,HK2	C426	CK73HBB1E103K	CHIP C	0.01UF K
C321		CC73HCH1H080B	CHIP C	8.0PF B	HK3	C427	CK73HBB1H471K	CHIP C	470PF K
C322		CC73HCH1H080B	CHIP C	8.0PF B	K,HK	C428	CC73HCH1H101J	CHIP C	100PF J
C322		CC73HCH1H180G	CHIP C	18PF G	K2,HK2	C429	CK73GB1H104K	CHIP C	0.10UF K
C322		CC73HCH1H390G	CHIP C	39PF G	HK3	C430	CK73FB1E475K	CHIP C	4.7UF K
C323		CC73HCH1H050B	CHIP C	5.0PF B	HK3	C431	CK73FB1E475K	CHIP C	4.7UF K
C323		CC73HCH1H080B	CHIP C	8.0PF B	K,K2,HK2,HK	C432	CE32BY1E470M	CHIP EL	47UF 25WV
C324		CC73HCH1H050B	CHIP C	5.0PF B	K,K2,HK2,HK	C433	CK73GB1H104K	CHIP C	0.10UF K
C324		CC73HCH1H060B	CHIP C	6.0PF B	HK3	C434	CK73HBB1H102K	CHIP C	1000PF K
C325		CC73HCH1H030B	CHIP C	3.0PF B	K,HK	C435	CK73FB1A106K	CHIP C	10UF K
C325		CC73HCH1H100B	CHIP C	10PF B	HK3	C436	GS77BA1A100M	CHIP TNL	10UF 10WV
C326		CC73HCH1H120G	CHIP C	12PF G	K2,HK2	C437	CK73HB1A224K	CHIP C	0.22UF K
C326		CC73HCH1H180G	CHIP C	18PF G	K,HK	C438	CK73FB1A106K	CHIP C	10UF K
C326		CK73HBB1H471K	CHIP C	470PF K	HK3	C439	CK73HBB1E103K	CHIP C	0.01UF K
C327		CK73HBB1H471K	CHIP C	470PF K		C440	CK73GB1E105K	CHIP C	1.0UF K
C330		CK73HBB1A104K	CHIP C	0.1UF K		C441	CK73HBB1E103K	CHIP C	0.01UF K
C331		CK73HBB1A104K	CHIP C	0.1UF K		C442	CK73HBB1E103K	CHIP C	0.01UF K
C332		CK73HBB1A104K	CHIP C	0.1UF K		C443	CK73GB1E105K	CHIP C	1.0UF K
C333		CK73HBB1A104K	CHIP C	0.1UF K		C444	CK73GB1E105K	CHIP C	1.0UF K
C334		CK73HBB1A104K	CHIP C	0.1UF K		C445	CK73FB1A106K	CHIP C	10UF K
C335		CC73HCH1H060B	CHIP C	6.0PF B	K,HK	C446	C92-0765-05	CHIP TNL	4.7UF 16WV
C335		CC73HCH1H120G	CHIP C	12PF G	K2,HK2	C447	CK73HB1A224K	CHIP C	0.22UF K
C335		CC73HCH1H470G	CHIP C	47PF G	HK3	C448	CK73HBB1E103K	CHIP C	0.01UF K
C336		CK73HBB1E103K	CHIP C	0.01UF K		C449	CK73GXR1C225K	CHIP C	2.2UF K
C337		CK73HBB1A104K	CHIP C	0.1UF K		C450	CK73HBB1E103K	CHIP C	0.01UF K
C338		CK73HBB1A104K	CHIP C	0.1UF K		C451	CK73GXR1C225K	CHIP C	2.2UF K
C339		CK73HBB1E103K	CHIP C	0.01UF K		C452	CK73HXR0J105K	CHIP C	1.0UF K
C341		CK73HXR0J105K	CHIP C	1.0UF K		C453	CK73GB1E105K	CHIP C	1.0UF K
C342		CK73FB1A106K	CHIP C	10UF K		C454	CK73HBB1H471K	CHIP C	470PF K

NX-800/800H

PARTS LIST

TX-RX UINT (X57-8900-XX)

TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation		
C455		CK73HBB1E103K	CHIP C	0.01UF	K	C535		CS77BP0J100M	CHIP TNL	10UF	6.3WV
C456		CK73HBB1E103K	CHIP C	0.01UF	K	C536		CK73HBB1E103K	CHIP C	0.01UF	K
C457		CK73GB1E105K	CHIP C	1.0UF	K	C537		CK73HBB1A104K	CHIP C	0.1UF	K
C458		CK73GB1E105K	CHIP C	1.0UF	K	C538		CK73HBB1A104K	CHIP C	0.1UF	K
C459		C92-0765-05	CHIP TNL	4.7UF	16WV	C539		CK73HBB1E103K	CHIP C	0.01UF	K
C460		CK73HBB1A104K	CHIP C	0.1UF	K	C540		CK73HXR0J105K	CHIP C	1.0UF	K
C461		CC73HCH1H181J	CHIP C	180PF	J	C541		CK73HBB1A104K	CHIP C	0.1UF	K
C462		CK73HBB1H471K	CHIP C	470PF	K	C542		CS77BP0J100M	CHIP TNL	10UF	6.3WV
C463		CK73HXR0J105K	CHIP C	1.0UF	K	C543		CC73HCH1H101J	CHIP C	100PF	J
C464		CC73HCH1H220J	CHIP C	22PF	J	C544		CC73HCH1H101J	CHIP C	100PF	J
C465		CK73GB1E105K	CHIP C	1.0UF	K	C545		CC73HCH1H101J	CHIP C	100PF	J
C466		CK73GB1E105K	CHIP C	1.0UF	K	C546		CC73HCH1H101J	CHIP C	100PF	J
C467		CK73GB1E105K	CHIP C	1.0UF	K	C547		CK73HBB1A104K	CHIP C	0.1UF	K
C468		CK73HBB1E103K	CHIP C	0.01UF	K	C548		CK73HBB1A104K	CHIP C	0.1UF	K
C471		CK73HXR0J105K	CHIP C	1.0UF	K	C549		CK73HBB1A104K	CHIP C	0.1UF	K
C473		CS77BA1E4R7M	CHIP TNL	4.7UF	25WV	C550		CK73HBB1A104K	CHIP C	0.1UF	K
C474		CK73HBB1E103K	CHIP C	0.01UF	K	C551		CK73HBB1E103K	CHIP C	0.01UF	K
C475		CK73FB1A106K	CHIP C	10UF	K	C552		CK73HXR0J105K	CHIP C	1.0UF	K
C476		CK73HBB1H102K	CHIP C	1000PF	K	C553		CC73HCH1H101J	CHIP C	100PF	J
C477		CC73HCH1H101J	CHIP C	100PF	J	C554		CK73HBB1A104K	CHIP C	0.1UF	K
C478		CK73HBB1H102K	CHIP C	1000PF	K	C555		CK73HBB1A104K	CHIP C	0.1UF	K
C479		CK73HBB1H102K	CHIP C	1000PF	K	C556		CK73HBB1A104K	CHIP C	0.1UF	K
C480		CK73HBB1H102K	CHIP C	1000PF	K	C557		CK73HBB1A104K	CHIP C	0.1UF	K
C481		CK73HBB1H102K	CHIP C	1000PF	K	C558		CK73HBB1A104K	CHIP C	0.1UF	K
C482		CK73HBB1H102K	CHIP C	1000PF	K	C559		CK73HBB1E103K	CHIP C	0.01UF	K
C483		CK73HBB1H102K	CHIP C	1000PF	K	C560		CK73HXR0J105K	CHIP C	1.0UF	K
C501		CK73HXR0J105K	CHIP C	1.0UF	K	C561		CC73HCH1H101J	CHIP C	100PF	J
C502		CK73HXR0J105K	CHIP C	1.0UF	K	C562		CC73HCH1H101J	CHIP C	100PF	J
C503		CK73HBB1A104K	CHIP C	0.1UF	K	C563		CC73HCH1H101J	CHIP C	100PF	J
C504		CK73HBB1A104K	CHIP C	0.1UF	K	C565		CC73HCH1H101J	CHIP C	100PF	J
C505		CK73HBB1A104K	CHIP C	0.1UF	K	C566		CC73HCH1H101J	CHIP C	100PF	J
C506		CK73HBB1A104K	CHIP C	0.1UF	K	C567		CK73HBB1H102K	CHIP C	1000PF	K
C507		CK73HBB1A104K	CHIP C	0.1UF	K	C568		CC73HCH1H101J	CHIP C	100PF	J
C508		CK73HBB1H102K	CHIP C	1000PF	K	C569		CC73HCH1H101J	CHIP C	100PF	J
C509		CK73HBB1A104K	CHIP C	0.1UF	K	C570		CC73HCH1H101J	CHIP C	100PF	J
C511		CK73HBB1A104K	CHIP C	0.1UF	K	C571		CC73HCH1H101J	CHIP C	100PF	J
C512		CK73HBB1A104K	CHIP C	0.1UF	K	C572		CC73HCH1H101J	CHIP C	100PF	J
C513		CK73HBB1A104K	CHIP C	0.1UF	K	C573		CC73HCH1H101J	CHIP C	100PF	J
C514		CK73HBB1A104K	CHIP C	0.1UF	K	C574		CC73HCH1H101J	CHIP C	100PF	J
C515		CK73HXR0J105K	CHIP C	1.0UF	K	C575		CC73HCH1H101J	CHIP C	100PF	J
C516		CK73HBB1A104K	CHIP C	0.1UF	K	C576		CC73HCH1H101J	CHIP C	100PF	J
C517		CK73HBB1A104K	CHIP C	0.1UF	K	C577		CC73HCH1H101J	CHIP C	100PF	J
C518		CK73GB1E105K	CHIP C	1.0UF	K	C578		CC73HCH1H101J	CHIP C	100PF	J
C520		CK73HBB1E103K	CHIP C	0.01UF	K	C579		CK73HBB1H102K	CHIP C	1000PF	K
C521		CK73HBB1E103K	CHIP C	0.01UF	K	C580		CC73HCH1H101J	CHIP C	100PF	J
C522		CK73HBB1E103K	CHIP C	0.01UF	K	C581		CK73HBB1H102K	CHIP C	1000PF	K
C523		CK73HBB1E103K	CHIP C	0.01UF	K	C582		CK73HBB1H102K	CHIP C	1000PF	K
C527		CK73HBB1E103K	CHIP C	0.01UF	K	C583		CK73HBB1H102K	CHIP C	1000PF	K
C528		CK73HBB1A104K	CHIP C	0.1UF	K	C584		CC73HCH1H101J	CHIP C	100PF	J
C529		CK73HBB1E103K	CHIP C	0.01UF	K	C585		CC73HCH1H101J	CHIP C	100PF	J
C530		CK73HBB1E103K	CHIP C	0.01UF	K	C586		CK73HBB1E103K	CHIP C	0.01UF	K
C531		CK73HBB1A104K	CHIP C	0.1UF	K	C587		CK73HBB1H102K	CHIP C	1000PF	K
C532		CK73HBB1E103K	CHIP C	0.01UF	K	C588		CK73HBB1H102K	CHIP C	1000PF	K
C533		CK73HBB1A104K	CHIP C	0.1UF	K	C589		CK73HBB1H102K	CHIP C	1000PF	K
C534		CC73HCH1H101J	CHIP C	100PF	J	C590		CK73HBB1E103K	CHIP C	0.01UF	K

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation	
C591		CK73HBB1E103K	CHIP C	0.01UF	K	C719	CK73HBB1A104K	CHIP C	0.1UF	K
C592		CC73HCH1H101J	CHIP C	100PF	J	C720	CK73HBB1A104K	CHIP C	0.1UF	K
C593		CC73HCH1H101J	CHIP C	100PF	J	C721	CC73HCH1H221J	CHIP C	220PF	J
C594		CK73HBB1E103K	CHIP C	0.01UF	K	C722	CC73HCH1H470J	CHIP C	47PF	J
C595		CK73HBB1E103K	CHIP C	0.01UF	K	C723	CK73HBB1A104K	CHIP C	0.1UF	K
C596		CK73HBB1A104K	CHIP C	0.1UF	K	C724	CK73HBB1A104K	CHIP C	0.1UF	K
C597		CK73HBB1H102K	CHIP C	1000PF	K	C726	CK73HBB1A104K	CHIP C	0.1UF	K
C598		CK73HBB1H102K	CHIP C	1000PF	K	C727	CC73HCH1H820J	CHIP C	82PF	J
C599		CK73HBB1H102K	CHIP C	1000PF	K	C729	CK73HBB1A104K	CHIP C	0.1UF	K
C600		CK73HBB1H102K	CHIP C	1000PF	K	C730	CK73HBB1H561K	CHIP C	560PF	K
C601		CK73HBB1H102K	CHIP C	1000PF	K	C731	CK73HBB1A104K	CHIP C	0.1UF	K
C602		CK73HBB1H102K	CHIP C	1000PF	K	C734	CK73HBB1E103K	CHIP C	0.01UF	K
C603		CK73HBB1H102K	CHIP C	1000PF	K	C735	CK73FB1E475K	CHIP C	4.7UF	K
C604		CK73HBB1H102K	CHIP C	1000PF	K	C736	CC73HCH1H101J	CHIP C	100PF	J
C605		CK73HBB1H102K	CHIP C	1000PF	K	C737	CK73HBB1A104K	CHIP C	0.1UF	K
C606		CK73HBB1H102K	CHIP C	1000PF	K	C738	CK73HBB1H102K	CHIP C	1000PF	K
C607		CK73HBB1H102K	CHIP C	1000PF	K	C740	CK73HBB1H472K	CHIP C	4700PF	K
C608		CC73HCH1H101J	CHIP C	100PF	J	C741	CK73HB1A154K	CHIP C	0.15UF	K
C609		CK73HBB1H102K	CHIP C	1000PF	K	C742	CK73HBB1A104K	CHIP C	0.1UF	K
C610		CC73HCH1H101J	CHIP C	100PF	J	C743	CK73HBB1E103K	CHIP C	0.01UF	K
C611		CK73HBB1H102K	CHIP C	1000PF	K	C744	CK73HBB1A104K	CHIP C	0.1UF	K
C612		CK73GBB1H103K	CHIP C	1000PF	K	C745	CK73HBB1E103K	CHIP C	0.01UF	K
C613		CK73GB1E105K	CHIP C	1.0UF	K	C746	CK73HBB1E103K	CHIP C	0.01UF	K
C614		CK73GB1E105K	CHIP C	1.0UF	K	C747	CK73HBB1E103K	CHIP C	0.01UF	K
C615		CK73GB1E105K	CHIP C	1.0UF	K	C748	CK73HBB1A104K	CHIP C	0.1UF	K
C616		CK73GB1E105K	CHIP C	1.0UF	K	C749	CK73HBB1A104K	CHIP C	0.1UF	K
C618		CK73HBB1E103K	CHIP C	0.01UF	K	C750	CK73HBB1A104K	CHIP C	0.1UF	K
C620		CK73HBB1E103K	CHIP C	0.01UF	K	C751	CK73HBB1A104K	CHIP C	0.1UF	K
C621		CK73HBB1E103K	CHIP C	0.01UF	K	C752	CK73HBB1E103K	CHIP C	0.01UF	K
C622		CK73HBB1H102K	CHIP C	1000PF	K	C753	CK73HBB1E103K	CHIP C	0.01UF	K
C623		CK73HBB1E103K	CHIP C	0.01UF	K	C754	CK73HBB1H102K	CHIP C	1000PF	K
C624		CK73HBB1E103K	CHIP C	0.01UF	K	C757	CC73HCH1H150J	CHIP C	15PF	J
C625		CK73HBB1E103K	CHIP C	0.01UF	K	C761	CK73HBB1E103K	CHIP C	0.01UF	K
C626		CK73HBB1E103K	CHIP C	0.01UF	K	C762	CK73HBB1A104K	CHIP C	0.1UF	K
C627		CK73HBB1E103K	CHIP C	0.01UF	K	C763	CK73HBB1A104K	CHIP C	0.1UF	K
C628		CK73HBB1E103K	CHIP C	0.01UF	K	C764	CC73HCH1H220J	CHIP C	22PF	J
C629		CK73HBB1E103K	CHIP C	0.01UF	K	C765	CK73GB1E105K	CHIP C	1.0UF	K
C630		CK73GB1H104K	CHIP C	0.10UF	K	C766	CK73GB1E105K	CHIP C	1.0UF	K
C701		CK73GB0J335K	CHIP C	3.3UF	K	C767	CK73HBB1A104K	CHIP C	0.1UF	K
C702		CK73HXR0J105K	CHIP C	1.0UF	K	C768	CK73HBB1E103K	CHIP C	0.01UF	K
C702		CK73HXR0J105K	CHIP C	1.0UF	K	C769	CK73HBB1E103K	CHIP C	0.01UF	K
C704		CC73HCH1H030B	CHIP C	3.0PF	B	C770	CK73HBB1A104K	CHIP C	0.1UF	K
C705		CK73HB1H122K	CHIP C	1200PF	K	C773	CK73HBB1A104K	CHIP C	0.1UF	K
C706		CK73HB1H331K	CHIP C	330PF	K	C774	CK73HBB1H102K	CHIP C	1000PF	K
C707		CK73HBB1A104K	CHIP C	0.1UF	K	C775	CK73HBB1A104K	CHIP C	0.1UF	K
C708		CK73HB1H122K	CHIP C	1200PF	K	C776	CK73HXR0J105K	CHIP C	1.0UF	K
C709		CC73HCH1H221J	CHIP C	220PF	J	C777	CK73HBB1H102K	CHIP C	1000PF	K
C710		CK73HBB1E103K	CHIP C	0.01UF	K	C778	CK73HBB1A104K	CHIP C	0.1UF	K
C711		CC73HCH1H181J	CHIP C	180PF	J	C779	CC73HCH1H680J	CHIP C	68PF	J
C712		CC73HCH1H680J	CHIP C	68PF	J	C782	CK73HBB1A104K	CHIP C	0.1UF	K
C714		CK73HBB1E103K	CHIP C	0.01UF	K	C783	CK73HBB1A104K	CHIP C	0.1UF	K
C715		CK73HB1H122K	CHIP C	1200PF	K	C784	CK73HBB1A104K	CHIP C	0.1UF	K
C716		CC73HCH1H221J	CHIP C	220PF	J	C785	CK73HBB1A104K	CHIP C	0.1UF	K
C717		CK73HBB1A104K	CHIP C	0.1UF	K	C786	CK73HBB1A104K	CHIP C	0.1UF	K
C718		CC73HCH1H221J	CHIP C	220PF	J					

NX-800/800H

PARTS LIST

TX-RX UINT (X57-8900-XX)

TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation	
C787		CK73FB1A106K	CHIP C	10UF	K	C920	CC73HCH1H101J	CHIP C	100PF	J
C788		CK73HBB1A104K	CHIP C	0.1UF	K	C921	CC73HCH1H101J	CHIP C	100PF	J
C789		CK73FB1E475K	CHIP C	4.7UF	K	C922	CK73HBB1H102K	CHIP C	1000PF	K
C790		CK73FB1A106K	CHIP C	10UF	K	C923	CK73HBB1H102K	CHIP C	1000PF	K
C791		CK73HBB1H102K	CHIP C	1000PF	K	C928	CK73HBB1E103K	CHIP C	0.01UF	K
C792		CC73HCH1H470J	CHIP C	47PF	J	CD201	L79-1850-05	TUNING COIL		
C793		CK73HBB1H102K	CHIP C	1000PF	K	CF201	L72-1017-05	CERAMIC FILTER		K,K2,HK2,HK
C794		CK73FB1A106K	CHIP C	10UF	K	CF201	L72-1027-05	CERAMIC FILTER		HK3
C795		CK73FB1A106K	CHIP C	10UF	K	CF202	L72-1021-05	CERAMIC FILTER		K,K2,HK2,HK
C796		CK73HBB1A104K	CHIP C	0.1UF	K	CF202	L72-1041-05	CERAMIC FILTER		HK3
C796		CK73HBB1A104K	CHIP C	0.1UF	K	CF203	L72-1040-05	CERAMIC FILTER		
C797		CK73HBB1A104K	CHIP C	0.1UF	K	CN401	E23-1260-14	TERMINAL		
C798		CK73HBB1A104K	CHIP C	0.1UF	K	CN402	E23-1260-14	TERMINAL		
C799		CK73HBB1A104K	CHIP C	0.1UF	K	CN403	E41-1682-05	PIN ASSY		
C801		CK73GB1E105K	CHIP C	1.0UF	K	CN405	J19-5386-05	HOLDER		
C802		CK73GB1E105K	CHIP C	1.0UF	K	CN502	E23-1278-05	TERMINAL		
C803		CK73HBB1H102K	CHIP C	1000PF	K	CN503	E23-1278-05	TERMINAL		
C804		CK73HBB1H102K	CHIP C	1000PF	K	CN504	E23-1278-05	TERMINAL		
C805		CK73HBB1H102K	CHIP C	1000PF	K	CN505	E23-1278-05	TERMINAL		
C805		CK73HBB1H102K	CHIP C	1000PF	K	CN506	E23-1278-05	TERMINAL		
C806		C92-0906-05	ELECTRO	330UF	16WV	CN507	E23-1278-05	TERMINAL		
C807		CE32BY1E470M	CHIP EL	47UF	25WV	CN508	E23-1278-05	TERMINAL		
C809		CK73HBB1H102K	CHIP C	1000PF	K	CN509	E23-1278-05	TERMINAL		
C810		CK73HBB1H471K	CHIP C	470PF	K	CN510	E23-1278-05	TERMINAL		
C811		CK73HBB1H102K	CHIP C	1000PF	K	CN511	E23-1278-05	TERMINAL		
C811		CK73HBB1H102K	CHIP C	1000PF	K	CN512	E23-1278-05	TERMINAL		
C813		CK73FB1A106K	CHIP C	10UF	K	CN513	E23-1278-05	TERMINAL		
C814		CK73HBB1H471K	CHIP C	470PF	K	CN516	E23-1278-05	TERMINAL		
C815		CK73FB1A106K	CHIP C	10UF	K	CN517	E23-1278-05	TERMINAL		
C816		CK73FB1A106K	CHIP C	10UF	K	CN520	E23-1278-05	TERMINAL		
C817		CK73HBB1E103K	CHIP C	0.01UF	K	CN527	E23-1278-05	TERMINAL		
C817		CK73HBB1E103K	CHIP C	0.01UF	K	CN540	E23-1278-05	TERMINAL		
C818		CK73HXRQJ105K	CHIP C	1.0UF	K	CN542	E23-1278-05	TERMINAL		
C818		CK73HXRQJ105K	CHIP C	1.0UF	K	CN543	E23-1278-05	TERMINAL		
C820		CK73GB1E105K	CHIP C	1.0UF	K	CN549	E40-6720-05	SOCKET FOR PIN ASSY		
C821		CK73HBB1H102K	CHIP C	1000PF	K	CN595	E40-6361-05	PIN ASSY		
C824		CK73HBB1H102K	CHIP C	1000PF	K	CN597	E40-6558-05	FLAT CABLE CONNECTOR		
C824		CK73HBB1H102K	CHIP C	1000PF	K	CN600	E40-6560-05	FLAT CABLE CONNECTOR		
C825		CC73HCH1H101J	CHIP C	100PF	J	CN611	E23-1278-05	TERMINAL		
C826		CK73HBB1H102K	CHIP C	1000PF	K	CN612	E23-1278-05	TERMINAL		
C828		CC73HCH1H101J	CHIP C	100PF	J	CN614	E23-1278-05	TERMINAL		
C828		CC73HCH1H101J	CHIP C	100PF	J	CN705	E40-6582-05	PIN ASSY		
C901		CC73HCH1H101J	CHIP C	100PF	J	CN901	E40-6560-05	FLAT CABLE CONNECTOR		
C902		CK73HBB1H102K	CHIP C	1000PF	K	D2	DA221	MULTIPLE DIODE		
C903		CC73HCH1H101J	CHIP C	100PF	J	D3	1SV325F	VARIABLE CAPACITANCE DIODE		
C904		CC73HCH1H101J	CHIP C	100PF	J	D4	1SV325F	VARIABLE CAPACITANCE DIODE		
C905		CC73HCH1H101J	CHIP C	100PF	J	D7	1SV282-F	VARIABLE CAPACITANCE DIODE		
C905		CC73HCH1H101J	CHIP C	100PF	J	D8	1SV282-F	VARIABLE CAPACITANCE DIODE		
C906		CC73HCH1H101J	CHIP C	100PF	J	D9	1SV282-F	VARIABLE CAPACITANCE DIODE		
C907		CK73HBB1H102K	CHIP C	1000PF	K	D10	1SV282-F	VARIABLE CAPACITANCE DIODE		
C908		CC73HCH1H101J	CHIP C	100PF	J	D11	1SV282-F	VARIABLE CAPACITANCE DIODE		
C909		CC73HCH1H101J	CHIP C	100PF	J	D12	1SV282-F	VARIABLE CAPACITANCE DIODE		
C910		CC73HCH1H101J	CHIP C	100PF	J	D14	1SV278F	VARIABLE CAPACITANCE DIODE		
C910		CC73HCH1H101J	CHIP C	100PF	J					
C911		CC73HCH1H101J	CHIP C	100PF	J					
C912		CC73HCH1H101J	CHIP C	100PF	J					
C913		CC73HCH1H101J	CHIP C	100PF	J					
C914		CC73HCH1H101J	CHIP C	100PF	J					
C915		CC73HCH1H101J	CHIP C	100PF	J					
C915		CC73HCH1H101J	CHIP C	100PF	J					
C916		CC73HCH1H101J	CHIP C	100PF	J					
C917		CC73HCH1H101J	CHIP C	100PF	J					
C918		CC73HCH1H101J	CHIP C	100PF	J					
C919		CC73HCH1H101J	CHIP C	100PF	J					

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
D21		HVC131	DIODE		D906		DZ2J180(M)	ZENER DIODE	
D101		HVC131	DIODE		D907		MC2850	DIODE	
D102		DZ2J056(M)	ZENER DIODE		D908		MC2850	DIODE	
D103		L407CDB	DIODE(50V/1W)	HK2,HK3,HK	D909		1SS355	DIODE	
D104		L407CDB	DIODE(50V/1W)		D910		DZ2J180(M)	ZENER DIODE	
D106		JDP2S12CR	DIODE		D911		MC2850	DIODE	
D108		HSM88AS-E	DIODE		D912		MC2850	DIODE	
D109		HSM88AS-E	DIODE		D913		1SS355	DIODE	
D110		HSM88AS-E	DIODE		D914		DZ2J180(M)	ZENER DIODE	
D201		KDS112E-P	MULTIPLE DIODE		F401		F53-0328-15	FUSE	
D202		KDS112E-P	MULTIPLE DIODE		F501		F53-0352-05	FUSE	
D205		HVC131	DIODE		IC1		LM73CIMKX-0	MOS-IC	
D207		1SV278F	VARIABLE CAPACITANCE DIODE		IC2		LMC7101BIM5	MOS-IC	
D208		1SV278F	VARIABLE CAPACITANCE DIODE		IC3		SKY72310362LF	MOS-IC	
D209		1SV278F	VARIABLE CAPACITANCE DIODE		IC4		LMC7101BIM5	MOS-IC	
D210		1SV278F	VARIABLE CAPACITANCE DIODE		IC5		TC75W51FK(F)	MOS-IC	
D212		1SV278F	VARIABLE CAPACITANCE DIODE		IC101		TA75W01FUJ	BIPOLAR IC	
D213		1SV278F	VARIABLE CAPACITANCE DIODE		IC102	2A	RA30H4452M123	MOS-IC	K
D216		HVC131	DIODE		IC102	2A	RA55H3340M131	MOS-IC	HK3
D401		DZ2J180(M)	ZENER DIODE		IC102	2A	RA55H4047A123	MOS-IC	HK2
D403		1SS416	DIODE		IC102	2A	RA55H4452M131	MOS-IC	HK
D404		22ZR-10D	SURGE ABSORBER		IC103		TA75W01FUJ	BIPOLAR IC	
D405		DSA3A1	DIODE		IC202		TK10931VTL-G	ANALOGUE IC	
D406		DA2S101	DIODE		IC203		TC75W51FK(F)	MOS-IC	
D407		DB22306	SCHOTTKY BARRIER DIODE		IC204		AK1224	MOS-IC	
D408		KDS121-P	DIODE		IC207		BD7542FVM	MOS-IC	
D409		1SS388F	SCHOTTKY BARRIER DIODE		IC401		XC6108C23CM-G	MOS-IC	
D410		1SS388F	SCHOTTKY BARRIER DIODE		IC402		XC6204B332P-G	MOS-IC	
D411		1SS388F	SCHOTTKY BARRIER DIODE		IC403	2A	NJM78M08FA-ZB	ANALOGUE IC	
D412		1SS388F	SCHOTTKY BARRIER DIODE		IC404		TA7805F-NQ	MOS-IC	
D501		1SS388F	SCHOTTKY BARRIER DIODE		IC405		LT1616ES6-PBF	ANALOGUE IC	
D502		1SS388F	SCHOTTKY BARRIER DIODE		IC406		TK71733S	BI-POLAR IC	
D503		1SS416	DIODE		IC407		XC6204B332M-G	MOS-IC	
D504		1SS416	DIODE		IC408		XC6204B332M-G	MOS-IC	
D506		1SS416	DIODE		IC409		XC6205B152P-G	MOS-IC	
D507		1SS416	DIODE		IC410		XC9101D09AK-G	MOS-IC	
D508		MC2850	DIODE		IC501		Note1	ROM IC	
D509		1SS416	DIODE		IC502		Note1	MICROPROCESSOR IC	
D510		1SS416	DIODE		IC503		Note1	SRAM IC	
D511		MC2850	DIODE		IC504		RV5C386A	MOS-IC	
D512		MC2850	DIODE		IC505		TC7SH08FU-F	MOS-IC	
D702		DA2S101	DIODE		IC506		XC6109C29AN-G	MOS-IC	
D703		KDR731	DIODE		IC507		TC7SH126FU-F	MOS-IC	
D704		KDR731	DIODE		IC508		SM5023CNDH-G	MOS-IC	
D705		KDR731	DIODE		IC509		TC7WT125FUF	MOS-IC	
D706		EMZ6.8N	ZENER DIODE		IC510		Note1	MOS-IC	
D707		EMZ6.8N	ZENER DIODE		IC511		TC7SH08FU-F	MOS-IC	
D901		MC2850	DIODE		IC512		TC7SET08FU-F	MOS-IC	
D902		MC2850	DIODE		IC513		TC7SET08FU-F	MOS-IC	
D903		MC2850	DIODE		IC514		TC7WBD125AFK	MOS-IC	
D904		MC2850	DIODE		IC515		TC7WT126FU-F	MOS-IC	
D905		DZ2J180(M)	ZENER DIODE		IC516		TC7WH126FU-F	MOS-IC	
					IC517		PCA9535RGE	MOS-IC	
					IC518		ADM202EARNZ	MOS-IC	

Note 1: This part cannot be replaced. Therefore, this part is not supplied as a service part.
If a part reference number is listed in a shaded box, that part does not come with the PCB.

NX-800/800H

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
IC701		TC75S51FE(F)	MOS-IC		L35		LB73H0AV-003	CHIP FERRITE BEADS	
IC702		TC75W51FK(F)	MOS-IC		L36		LB73H0AV-003	CHIP FERRITE BEADS	
IC703		TC75W51FK(F)	MOS-IC		L40		LB73H0AV-003	CHIP FERRITE BEADS	
IC705		TC75W51FK(F)	MOS-IC		L41		LB73H0AV-003	CHIP FERRITE BEADS	
IC706		TC75W51FK(F)	MOS-IC						
IC707		TC7W53FKF	MOS-IC		L101		LK73G0AF18NJ	SMALL FIXED INDUCTOR(18NH)	K,K2,HK2,HK
IC708		TC7W53FKF	MOS-IC		L101		LK73G0AF22NJ	SMALL FIXED INDUCTOR(22NH)	HK3
IC709		TC75W51FK(F)	MOS-IC		L102		LB73G0BA-004	CHIP FERRITE BEADS	
IC710		TC7W53FKF	MOS-IC		L103		LK73G0AF22NJ	SMALL FIXED INDUCTOR(22NH)	
IC711		TC75W51FK(F)	MOS-IC		L104		LK73G0AF18NJ	SMALL FIXED INDUCTOR(18NH)	HK3
IC712		M62364FP-F	MOS-IC		L104		LK73G0AF4N7S	SMALL FIXED INDUCTOR(4.7NH)	K2
IC713		TC7W53FKF	MOS-IC		L106		LB73G0BA-004	CHIP FERRITE BEADS	
IC714		TC75S51FE(F)	MOS-IC		L107		LB73Z0AF-001	CHIP FERRITE BEADS	HK2,HK3,HK
IC715	2A	LA4425A	MOS-IC		L108		LB73Z0AF-001	CHIP FERRITE BEADS	
					L109		LB73Z0AF-001	CHIP FERRITE BEADS	
J701		E1B-0001-00	3.5D PHONE JACK		L110		L34-4638-05	AIR-CORE COIL	
J901		E58-0521-05	SUB SOCKET(D)		L111		L34-4758-05	AIR-CORE COIL	
L1		LR77Z0AE4R7J	SMALL FIXED INDUCTOR(4.7NH)		L112		L34-4743-05	AIR-CORE COIL	K,K2,HK2,HK
L3		LB73H0AV-003	CHIP FERRITE BEADS		L112		L34-4758-05	AIR-CORE COIL	HK3
L4		LK73G0AF12NJ	SMALL FIXED INDUCTOR(12NH)	K,K2,HK2,HK	L113		L34-4743-05	AIR-CORE COIL	K,K2,HK2,HK
L4		LK73G0AF18NJ	SMALL FIXED INDUCTOR(18NH)	HK3	L113		L34-4758-05	AIR-CORE COIL	HK3
L6		LK73G0AQ100K	SMALL FIXED INDUCTOR(10UH)		L114		L34-4743-05	AIR-CORE COIL	K,K2,HK2,HK
L7		LK73G0AQ100K	SMALL FIXED INDUCTOR(10UH)		L114		L34-4758-05	AIR-CORE COIL	HK3
L10		L40-1878-92	SMALL FIXED INDUCTOR(18NH)		L115		L34-4848-05	AIR-CORE COIL	
L10		L40-4775-92	SMALL FIXED INDUCTOR(47NH)	K,K2,HK2,HK	L117		LB73H0AV-003	CHIP FERRITE BEADS	
L11		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)	HK3	L118		LB73H0AV-003	CHIP FERRITE BEADS	
L12		LK73G0AFR18J	SMALL FIXED INDUCTOR(180NH)	K,HK	L119		LB73H0AV-003	CHIP FERRITE BEADS	
L12		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)		L201		L40-1085-71	SMALL FIXED INDUCTOR(100NH)	
L13		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)	K2,HK2,HK3	L202		L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)	
L14		LK73G0AFR18J	SMALL FIXED INDUCTOR(180NH)	K,HK	L204		L41-4778-45	SMALL FIXED INDUCTOR(47NH)	
L14		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)	K2,HK2,HK3	L205		L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)	
L15		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)		L206		LB73G0BD-005	CHIP FERRITE BEADS	
L16		LK73G0AFR18J	SMALL FIXED INDUCTOR(180NH)	K,HK	L207		L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)	
L16		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)	K2,HK2,HK3	L208		LB73G0BD-005	CHIP FERRITE BEADS	
L17		L34-4607-15	AIR-CORE COIL	K,HK	L209		LK73G0AF22NJ	SMALL FIXED INDUCTOR(22NH)	K,HK
L17		LR79Z0CM22NG	SMALL FIXED INDUCTOR(22NH)	K2,HK2	L209		LK73G0AF33NJ	SMALL FIXED INDUCTOR(33NH)	K2,HK2
L17		LR79Z0CM28NG	SMALL FIXED INDUCTOR(28NH)	HK3	L209		LK73G0AF39NJ	SMALL FIXED INDUCTOR(39NH)	HK3
L18		L34-4610-15	AIR CORE COIL	HK3	L210		L39-1498-05	TOROIDAL COIL	
L18		LR79Z0CM22NG	SMALL FIXED INDUCTOR(22NH)	K,HK	L211		LB73G0BD-005	CHIP FERRITE BEADS	
L18		LR79Z0CM28NG	SMALL FIXED INDUCTOR(28NH)	K2,HK2	L212		L41-8285-14	SMALL FIXED INDUCTOR(820NH)	
L19		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)		L213		LK73G0AF15NJ	SMALL FIXED INDUCTOR(15NH)	K,HK
L20		L92-0446-05	BEADS CORE		L213		LK73G0AF22NJ	SMALL FIXED INDUCTOR(22NH)	K2,HK2
L21		LK73G0AFR18J	SMALL FIXED INDUCTOR(180NH)	K,HK	L213		LK73G0AF33NJ	SMALL FIXED INDUCTOR(33NH)	HK3
L21		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)	K2,HK2,HK3	L214		L41-8285-14	SMALL FIXED INDUCTOR(820NH)	
L22		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)		L215		LK73G0AF18NJ	SMALL FIXED INDUCTOR(18NH)	K,HK
L23		LK73G0AFR18J	SMALL FIXED INDUCTOR(180NH)	K,HK	L215		LK73G0AF22NJ	SMALL FIXED INDUCTOR(22NH)	K2,HK2
L23		LK73G0AFR22J	SMALL FIXED INDUCTOR(220NH)	K2,HK2,HK3	L215		LK73G0AF27NJ	SMALL FIXED INDUCTOR(27NH)	HK3
L25		LK73H0AM27NJ	SMALL FIXED INDUCTOR(27NH)	K2,HK2,HK3,HK	L216		LR79Z0DD21N9J	SMALL FIXED INDUCTOR(21.9NH)	K,K2,HK2,HK
L25		LK73H0AM27NJ	SMALL FIXED INDUCTOR(33NH)	K	L216		LR79Z0DD27N4J	SMALL FIXED INDUCTOR(27.4NH)	HK3
L26		LK73G0AF22NJ	SMALL FIXED INDUCTOR(22NH)	K,HK	L217		LR79Z0DD21N9J	SMALL FIXED INDUCTOR(21.9NH)	K,K2,HK2,HK
L26		LK73G0AF33NJ	SMALL FIXED INDUCTOR(33NH)	K2,HK2	L217		LR79Z0DD27N4J	SMALL FIXED INDUCTOR(27.4NH)	HK3
L26		LK73G0AF39NJ	SMALL FIXED INDUCTOR(39NH)	HK3	L218		LR79Z0DD21N9J	SMALL FIXED INDUCTOR(21.9NH)	K,K2,HK2,HK
L31		LB73H0AV-003	CHIP FERRITE BEADS		L218		LR79Z0DD27N4J	SMALL FIXED INDUCTOR(27.4NH)	HK3
L32		LB73H0AV-003	CHIP FERRITE BEADS		L219		LR79Z0DD21N9J	SMALL FIXED INDUCTOR(21.9NH)	K,K2,HK2,HK
L33		LB73H0AV-003	CHIP FERRITE BEADS		L219		LR79Z0DD27N4J	SMALL FIXED INDUCTOR(27.4NH)	HK3
L34		LB73H0AV-003	CHIP FERRITE BEADS		L221		L41-1578-14	SMALL FIXED INDUCTOR(15NH)	K,K2,HK2,HK

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
L221		L41-2278-14	SMALL FIXED INDUCTOR(22NH)	HK3	Q101		2SC5108F/Y/	TRANSISTOR	
L223		LR79Z0DD32N5J	SMALL FIXED INDUCTOR(32.5NH)	K,K2,HK2,HK	Q102		2SC5455-A	TRANSISTOR	
L223		LR79Z0DD37N7J	SMALL FIXED INDUCTOR(37.7NH)	HK3	Q105		LTC014EEBFS8	DIGITAL TRANSISTOR	
L224		LR79Z0DD32N5J	SMALL FIXED INDUCTOR(32.5NH)	K,K2,HK2,HK	Q106		2SK1830F	FET	
L224		LR79Z0DD37N7J	SMALL FIXED INDUCTOR(37.7NH)	HK3	Q201		LTA014EEBFS8	DIGITAL TRANSISTOR	
L225		L41-1278-14	SMALL FIXED INDUCTOR(12NH)	K,HK	Q202		LTC044EEBFS8	DIGITAL TRANSISTOR	
L225		L41-1578-14	SMALL FIXED INDUCTOR(15NH)	K2,HK2	Q203		2SC5636	TRANSISTOR	
L225		L41-1878-14	SMALL FIXED INDUCTOR(18NH)	HK3	Q204		2SC3356(R23)	TRANSISTOR	
L228		LK73G0AF12NJ	SMALL FIXED INDUCTOR(12NH)	HK3	Q205		2SC3356(R23)	TRANSISTOR	
L228		LK73G0AF2N7S	SMALL FIXED INDUCTOR(2.7NH)	K2,HK2	Q208		2SC5636	TRANSISTOR	
L229		LK73H0AM12NJ	SMALL FIXED INDUCTOR(12NH)	K,HK	Q209		2SC5383-T111	TRANSISTOR	
L229		LK73H0AM15NJ	SMALL FIXED INDUCTOR(15NH)	K2,HK2	Q210		NE5G240034	TRANSISTOR	
L229		LK73H0AM27NJ	SMALL FIXED INDUCTOR(27NH)	HK3	Q212		KRX206E-P	TRANSISTOR	
L230		LB73G0BD-005	CHIP FERRITE BEADS		Q401		LTC014EEBFS8	DIGITAL TRANSISTOR	
L233		L41-2285-14	SMALL FIXED INDUCTOR(220NH)		Q402		LTC014EEBFS8	DIGITAL TRANSISTOR	
L234		L41-3385-14	SMALL FIXED INDUCTOR(330NH)		Q403		LTC014TEBFS8	DIGITAL TRANSISTOR	
L240		L40-4775-71	SMALL FIXED INDUCTOR(47NH)	HK3	Q404		MTM981400BF	FET	
L240		LK73H0AM33NJ	SMALL FIXED INDUCTOR(33NH)	K,K2,HK2,HK	Q405		2SA1955A-F	TRANSISTOR	
L401		LB73Z0AF-001	CHIP FERRITE BEADS	HK2,HK3,HK	Q406		UPA672T-A	FET	
L402		LB73Z0AF-001	CHIP FERRITE BEADS		Q407		12A02CH	TRANSISTOR	
L403		LB73Z0AF-001	CHIP FERRITE BEADS		Q409		12A02CH	TRANSISTOR	
L404		LB73G0AM-004	CHIP FERRITE BEADS		Q410		SSM3K15TE(F)	FET	
L405		L33-1496-05	SMALL FIXED INDUCTOR(22UH)		Q411		2SA1955A-F	TRANSISTOR	
L406		L33-1462-05	SMALL FIXED INDUCTOR(68UH)		Q412		2SA1955A-F	TRANSISTOR	
L501		LB73G0BD-005	CHIP FERRITE BEADS		Q413		LTC014EEBFS8	DIGITAL TRANSISTOR	
L502		LB73G0BD-005	CHIP FERRITE BEADS		Q415		LTC014EEBFS8	DIGITAL TRANSISTOR	
L503		LB73G0BD-005	CHIP FERRITE BEADS		Q416		SSM6L05FU-F	FET	
L506		LB73G0BD-005	CHIP FERRITE BEADS		Q417		SSM5H01TU-F	FET	
L507		LB73G0BD-005	CHIP FERRITE BEADS		Q501		UPA672T-A	FET	
L508		LB73G0BD-005	CHIP FERRITE BEADS		Q701		SSM3K15TE(F)	FET	
L509		LB73G0BD-005	CHIP FERRITE BEADS		Q702		2SC4617(Q)	TRANSISTOR	
L510		LB73G0BD-005	CHIP FERRITE BEADS		Q703		SSM3K15TE(F)	FET	
L511		LB73G0BD-005	CHIP FERRITE BEADS		Q704		2SC4738(GR)F	TRANSISTOR	
L512		LB73G0BA-004	CHIP FERRITE BEADS		Q705		2SA1832(GR)F	TRANSISTOR	
L517		LB73G0BD-005	CHIP FERRITE BEADS		Q706		2SJ243-A	FET	
L518		LB73G0BD-005	CHIP FERRITE BEADS		Q707		2SJ243-A	FET	
L521		LB73H0AV-002	CHIP FERRITE BEADS		Q708		2SA1832(GR)F	TRANSISTOR	
L522		LB73H0AV-002	CHIP FERRITE BEADS		Q709		LTC014EEBFS8	DIGITAL TRANSISTOR	
L523		LB73H0AV-002	CHIP FERRITE BEADS		Q710		KRC401-P	DIGITAL TRANSISTOR	
L901		LB73G0BA-004	CHIP FERRITE BEADS		Q901		QSX6	TRANSISTOR	
L902		LB73G0BA-004	CHIP FERRITE BEADS		Q902		QSX6	TRANSISTOR	
L903		LB73H0AV-002	CHIP FERRITE BEADS		R1		RK73HH1J223D	CHIP R	22K D 1/16W
L904		LB73H0AV-002	CHIP FERRITE BEADS		R2		RK73HH1J223D	CHIP R	22K D 1/16W
L905		LB73H0AV-002	CHIP FERRITE BEADS		R3		RK73HB1J334J	CHIP R	330K J 1/16W
Q1		2SC5383-T111	TRANSISTOR		R4		RK73HB1J101J	CHIP R	100 J 1/16W
Q3		2SC5636	TRANSISTOR		R5		RK73HB1J224J	CHIP R	220K J 1/16W
Q4		2SC5383-T111	TRANSISTOR		R6		RK73HB1J472J	CHIP R	4.7K J 1/16W
Q5		2SK508NV(K52)	FET		R7		RK73HB1J103J	CHIP R	10K J 1/16W
Q6		2SK508NV(K52)	FET		R8		RK73HB1J472J	CHIP R	4.7K J 1/16W
Q7		SSM6L05FU-F	FET		R10		RK73HB1J000J	CHIP R	0.0 J 1/16W
Q8		SSM3J05FU-F	FET		R12		RK73HB1J472J	CHIP R	4.7K J 1/16W
Q9		2SC5636	TRANSISTOR		R13		RK73HB1J473J	CHIP R	47K J 1/16W
Q10		2SC5636	TRANSISTOR		R15		RK73HB1J100J	CHIP R	10 J 1/16W
Q11		2SK1215-E(E)	FET		R16		RK73HB1J100J	CHIP R	10 J 1/16W

NX-800/800H

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R17		RK73HB1J100J	CHIP R	10 J 1/16W	R82		RK73HB1J000J	CHIP R	0.0 J 1/16W
R18		RK73HB1J100J	CHIP R	10 J 1/16W	R83		RK73HB1J000J	CHIP R	0.0 J 1/16W
R19		RK73HB1J100J	CHIP R	10 J 1/16W	R84		RK73GB2A000J	CHIP R	0.0 J 1/10W
R21		RK73HB1J100J	CHIP R	10 J 1/16W	R85		RK73GB2A000J	CHIP R	0.0 J 1/10W
R22		RK73HB1J102J	CHIP R	1.0K J 1/16W	R86		RK73GB2A272J	CHIP R	2.7K J 1/10W
R23		RK73HB1J102J	CHIP R	1.0K J 1/16W	R101		RK73HB1J332J	CHIP R	3.3K J 1/16W
R25		RK73HB1J000J	CHIP R	0.0 J 1/16W	R102		RK73HB1J271J	CHIP R	270 J 1/16W HK3
R26		RK73HB1J104J	CHIP R	100K J 1/16W	R102		RK73HB1J821J	CHIP R	820 J 1/16W K,K2,HK2,HK
R27		RK73HB1J473J	CHIP R	47K J 1/16W	R103		RK73HB1J180J	CHIP R	18 J 1/16W HK3
R28		RK73HB1J683J	CHIP R	68K J 1/16W	R103		RK73HB1J5R6J	CHIP R	5.6 J 1/16W K,K2,HK2,HK
R29		RK73HB1J000J	CHIP R	0.0 J 1/16W	R104		RK73HB1J271J	CHIP R	270 J 1/16W HK3
R30		RK73HB1J184J	CHIP R	180K J 1/16W	R104		RK73HB1J821J	CHIP R	820 J 1/16W K,K2,HK2,HK
R31		RK73HB1J473J	CHIP R	47K J 1/16W	R105		RK73HB1J333J	CHIP R	33K J 1/16W
R32		RK73HB1J151J	CHIP R	150 J 1/16W	R106		RK73HB1J221J	CHIP R	220 J 1/16W K,K2,HK2,HK
R34		RK73HB1J102J	CHIP R	1.0K J 1/16W	R106		RK73HB1J471J	CHIP R	470 J 1/16W HK3
R35		RK73HH1J391D	CHIP R	390 D 1/16W	R107		RK73HB1J682J	CHIP R	6.8K J 1/16W
R36		RK73HB1J106J	CHIP R	10M J 1/16W	R108		RK73GB2A100J	CHIP R	10 J 1/10W
R37		RK73HB1J103J	CHIP R	10K J 1/16W	R109		RK73HB1J331J	CHIP R	330 J 1/16W HK3
R40		RK73HB1J000J	CHIP R	0.0 J 1/16W	R109		RK73HB1J471J	CHIP R	470 J 1/16W K,K2,HK2,HK
R41		RK73HB1J000J	CHIP R	0.0 J 1/16W	R110		RK73GB2A220J	CHIP R	22 J 1/10W
R42		RK73HB1J104J	CHIP R	100K J 1/16W	R111		RK73HB1J561J	CHIP R	560 J 1/16W
R43		RK73HB1J100J	CHIP R	10 J 1/16W	R112		RK73HB1J272J	CHIP R	2.7K J 1/16W
R44		RK73HB1J000J	CHIP R	0.0 J 1/16W	R113		RK73GB2A100J	CHIP R	10 J 1/10W
R45		RK73HB1J104J	CHIP R	100K J 1/16W	R114		RK73HB1J331J	CHIP R	330 J 1/16W
R46		RK73HB1J271J	CHIP R	270 J 1/16W	R115		RK73HB1J000J	CHIP R	0.0 J 1/16W
R47		RK73HB1J154J	CHIP R	150K J 1/16W K,K2,HK2,HK	R116		RK73GB2A000J	CHIP R	0.0 J 1/10W K,K2,HK3,HK
R47		RK73HB1J224J	CHIP R	220K J 1/16W HK3	R117		RK73HB1J103J	CHIP R	10K J 1/16W
R49		RK73HB1J683J	CHIP R	68K J 1/16W	R119		RK73HB1J473J	CHIP R	47K J 1/16W
R53		RK73HB1J473J	CHIP R	47K J 1/16W	R120		RK73HB1J104J	CHIP R	100K J 1/16W
R54		RK73HB1J473J	CHIP R	47K J 1/16W	R121		RK73GB2A000J	CHIP R	0.0 J 1/10W
R55		RK73HB1J472J	CHIP R	4.7K J 1/16W	R122		RK73HB1J683J	CHIP R	68K J 1/16W
R56		RK73HB1J474J	CHIP R	470K J 1/16W	R123		RK73HB1J273J	CHIP R	27K J 1/16W
R57		RK73HH1J181D	CHIP R	180 D 1/16W	R124		RK73HB1J332J	CHIP R	3.3K J 1/16W
R58		RK73HB1J181J	CHIP R	180 J 1/16W	R125		RK73FB2B271J	CHIP R	270 J 1/8W
R59		RK73HH1J181D	CHIP R	180 D 1/16W	R126		RK73FB2B390J	CHIP R	39 J 1/8W
R60		RK73HB1J102J	CHIP R	1.0K J 1/16W	R127		RK73FB2B390J	CHIP R	39 J 1/8W
R61		RK73HB1J473J	CHIP R	47K J 1/16W	R129		RK73FB2B271J	CHIP R	270 J 1/8W
R62		RK73HB1J154J	CHIP R	150K J 1/16W	R131		RK73HB1J331J	CHIP R	330 J 1/16W
R63		RK73HB1J101J	CHIP R	100 J 1/16W	R132		RK73HB1J104J	CHIP R	100K J 1/16W
R64		RK73HB1J682J	CHIP R	6.8K J 1/16W	R133		RK73HB1J104J	CHIP R	100K J 1/16W
R65		RK73HB1J103J	CHIP R	10K J 1/16W	R134		RK73HB1J224J	CHIP R	220K J 1/16W HK
R66		RK73HB1J331J	CHIP R	330 J 1/16W	R134		RK73HB1J274J	CHIP R	270K J 1/16W K,K2,HK3
R67		RK73HB1J222J	CHIP R	2.2K J 1/16W	R136		RK73HB1J104J	CHIP R	100K J 1/16W
R68		RK73HB1J470J	CHIP R	47 J 1/16W	R137		RK73HB1J334J	CHIP R	330K J 1/16W
R69		RK73HB1J000J	CHIP R	0.0 J 1/16W	R138		RK73EB2E301J	CHIP R	300 J 1/4W
R70		RK73HB1J472J	CHIP R	4.7K J 1/16W	R140		RK73HB1J104J	CHIP R	100K J 1/16W
R71		RK73HB1J474J	CHIP R	470K J 1/16W	R141		RK73HB1J124J	CHIP R	120K J 1/16W
R72		RK73HB1J183J	CHIP R	18K J 1/16W	R142		RK73HB1J104J	CHIP R	100K J 1/16W
R74		RK73HB1J102J	CHIP R	1.0K J 1/16W	R143		RK73GB2A000J	CHIP R	0.0 J 1/10W
R75		RK73HB1J221J	CHIP R	220 J 1/16W	R144		RK73HB1J824J	CHIP R	820K J 1/16W
R76		RK73HB1J474J	CHIP R	470K J 1/16W	R145		RK73HB1J333J	CHIP R	33K J 1/16W HK2
R77		RK73HB1J101J	CHIP R	100 J 1/16W	R145		RK73HB1J393J	CHIP R	39K J 1/16W HK3,HK
R79		RK73HB1J000J	CHIP R	0.0 J 1/16W	R145		RK73HB1J823J	CHIP R	82K J 1/16W K,K2
R80		RK73HB1J000J	CHIP R	0.0 J 1/16W	R146		RK73HB1J104J	CHIP R	100K J 1/16W
R81		RK73HB1J000J	CHIP R	0.0 J 1/16W	R147		RK73HB1J104J	CHIP R	100K J 1/16W

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R148		RK73HB1J103J	CHIP R	10K J 1/16W	R245		RK73HB1J154J	CHIP R	150K J 1/16W
R149		RK73HB1J104J	CHIP R	100K J 1/16W	R246		RK73HB1J104J	CHIP R	100K J 1/16W
R149		RK73HB1J823J	CHIP R	82K J 1/16W	R248		RK73HB1J474J	CHIP R	470K J 1/16W
R150		RK73HB1J683J	CHIP R	68K J 1/16W	R250		RK73HB1J222J	CHIP R	2.2K J 1/16W
R150		RK73HB1J823J	CHIP R	82K J 1/16W	R251		RK73HB1J000J	CHIP R	0.0 J 1/16W
R151		RK73HB1J104J	CHIP R	100K J 1/16W	R252		RK73HB1J000J	CHIP R	0.0 J 1/16W
R151		RK73HB1J124J	CHIP R	120K J 1/16W	R254		RK73HB1J101J	CHIP R	100 J 1/16W
R151		RK73HB1J154J	CHIP R	150K J 1/16W	R256		RK73HB1J221J	CHIP R	220 J 1/16W
R152		R92-1061-05	JUMPER REST 0 OHM		R261		RK73HB1J472J	CHIP R	4.7K J 1/16W
R153		RK73HB1J121J	CHIP R	120 J 1/16W	R262		RK73HB1J682J	CHIP R	6.8K J 1/16W
R153		RK73HB1J151J	CHIP R	150 J 1/16W	R263		RK73HB1J101J	CHIP R	100 J 1/16W
R154		RK73EB2E301J	CHIP R	300 J 1/4W	R265		RK73HB1J103J	CHIP R	10K J 1/16W
R156		RK73HB1J000J	CHIP R	0.0 J 1/16W	R266		RK73HB1J222J	CHIP R	2.2K J 1/16W
R158		RK73HB1J000J	CHIP R	0.0 J 1/16W	R267		RK73HB1J271J	CHIP R	270 J 1/16W
R160		RK73HB1J000J	CHIP R	0.0 J 1/16W	R269		RK73HB1J470J	CHIP R	47 J 1/16W
R161		RK73HB1J332J	CHIP R	3.3K J 1/16W	R270		RK73HB1J393J	CHIP R	39K J 1/16W
R170		RK73GB2A000J	CHIP R	0.0 J 1/10W	R272		RK73HB1J271J	CHIP R	270 J 1/16W
R201		RK73HB1J153J	CHIP R	15K J 1/16W	R273		RK73HB1J180J	CHIP R	18 J 1/16W
R201		RK73HB1J222J	CHIP R	2.2K J 1/16W	R274		RK73HB1J102J	CHIP R	1.0K J 1/16W
R202		RK73HB1J223J	CHIP R	22K J 1/16W	R275		RK73HB1J271J	CHIP R	270 J 1/16W
R203		RK73HB1J223J	CHIP R	22K J 1/16W	R276		RK73HB1J102J	CHIP R	1.0K J 1/16W
R204		RK73HB1J470J	CHIP R	47 J 1/16W	R277		RK73GB2A000J	CHIP R	0.0 J 1/10W
R205		RK73HB1J223J	CHIP R	22K J 1/16W	R278		RK73HB1J271J	CHIP R	270 J 1/16W
R206		RK73HB1J223J	CHIP R	22K J 1/16W	R278		RK73HB1J471J	CHIP R	470 J 1/16W
R207		RK73HB1J334J	CHIP R	330K J 1/16W	R279		RK73HB1J000J	CHIP R	0.0 J 1/16W
R208		RK73HB1J153J	CHIP R	15K J 1/16W	R279		RK73HB1J120J	CHIP R	12 J 1/16W
R210		RK73HB1J100J	CHIP R	10 J 1/16W	R279		RK73HB1J180J	CHIP R	18 J 1/16W
R212		RK73HB1J000J	CHIP R	0.0 J 1/16W	R280		RK73HB1J271J	CHIP R	270 J 1/16W
R213		RK73HB1J102J	CHIP R	1.0K J 1/16W	R280		RK73HB1J471J	CHIP R	470 J 1/16W
R215		RK73HB1J122J	CHIP R	1.2K J 1/16W	R281		RK73HB1J472J	CHIP R	4.7K J 1/16W
R215		RK73HB1J272J	CHIP R	2.7K J 1/16W	R283		RK73HB1J104J	CHIP R	100K J 1/16W
R215		RK73HB1J332J	CHIP R	3.3K J 1/16W	R284		RK73HB1J104J	CHIP R	100K J 1/16W
R216		RK73HB1J000J	CHIP R	0.0 J 1/16W	R285		RK73HB1J103J	CHIP R	10K J 1/16W
R219		RK73HB1J103J	CHIP R	10K J 1/16W	R286		RK73HB1J104J	CHIP R	100K J 1/16W
R222		RK73HB1J102J	CHIP R	1.0K J 1/16W	R287		RK73HB1J104J	CHIP R	100K J 1/16W
R223		RK73HB1J274J	CHIP R	270K J 1/16W	R288		RK73HB1J101J	CHIP R	100 J 1/16W
R224		RK73HB1J103J	CHIP R	10K J 1/16W	R289		RK73HB1J104J	CHIP R	100K J 1/16W
R225		RK73HB1J153J	CHIP R	15K J 1/16W	R290		RK73HB1J274J	CHIP R	270K J 1/16W
R226		RK73HB1J473J	CHIP R	47K J 1/16W	R290		RK73HB1J474J	CHIP R	470K J 1/16W
R227		RK73HB1J104J	CHIP R	100K J 1/16W	R291		RK73HB1J104J	CHIP R	100K J 1/16W
R228		RK73HB1J223J	CHIP R	22K J 1/16W	R294		RK73HB1J000J	CHIP R	0.0 J 1/16W
R229		RK73HB1J102J	CHIP R	1.0K J 1/16W	R296		RK73HB1J103J	CHIP R	10K J 1/16W
R230		RK73HB1J102J	CHIP R	1.0K J 1/16W	R297		RK73HB1J000J	CHIP R	0.0 J 1/16W
R230		RK73HB1J272J	CHIP R	2.7K J 1/16W	R299		RK73HB1J101J	CHIP R	100 J 1/16W
R231		RK73HB1J221J	CHIP R	220 J 1/16W	R301		RK73HB1J684J	CHIP R	680K J 1/16W
R232		RK73HB1J101J	CHIP R	100 J 1/16W	R302		RK73HB1J104J	CHIP R	100K J 1/16W
R234		RK73HB1J103J	CHIP R	10K J 1/16W	R303		RK73HB1J104J	CHIP R	100K J 1/16W
R235		RK73HB1J000J	CHIP R	0.0 J 1/16W	R306		RK73HB1J183J	CHIP R	18K J 1/16W
R236		RK73HB1J000J	CHIP R	0.0 J 1/16W	R307		RK73HB1J183J	CHIP R	18K J 1/16W
R237		RK73HB1J473J	CHIP R	47K J 1/16W	R310		RK73HB1J000J	CHIP R	0.0 J 1/16W
R238		RK73HB1J103J	CHIP R	10K J 1/16W	R313		RK73GB2A000J	CHIP R	0.0 J 1/10W
R239		RK73HB1J104J	CHIP R	100K J 1/16W	R314		RK73HB1J000J	CHIP R	0.0 J 1/16W
R242		RK73HB1J221J	CHIP R	220 J 1/16W	R315		RK73HB1J104J	CHIP R	100K J 1/16W
R243		RK73HB1J101J	CHIP R	100 J 1/16W	R316		RK73HB1J104J	CHIP R	100K J 1/16W
R244		RK73HB1J000J	CHIP R	0.0 J 1/16W	R317		RK73HB1J000J	CHIP R	0.0 J 1/16W

NX-800/800H

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R323		RK73HB1J470J	CHIP R	47 J 1/16W	R436		RK73HB1J000J	CHIP R	0.0 J 1/16W
R324		RK73HB1J182J	CHIP R	1.8K J 1/16W	R437		RK73HB1J474J	CHIP R	470K J 1/16W
R325		RK73HB1J182J	CHIP R	1.8K J 1/16W	R438		RK73HB1J154J	CHIP R	150K J 1/16W
R326		RK73HB1J122J	CHIP R	1.2K J 1/16W	R440		RK73HB1J102J	CHIP R	1.0K J 1/16W
R327		RK73HB1J332J	CHIP R	3.3K J 1/16W	R441		RK73HB1J123J	CHIP R	12K J 1/16W
R328		RK73HB1J102J	CHIP R	1.0K J 1/16W	R442		RK73HH1J334D	CHIP R	330K D 1/16W
R329		RK73HB1J562J	CHIP R	5.6K J 1/16W	R443		RK73HH1J223D	CHIP R	22K D 1/16W
R329		RK73HB1J682J	CHIP R	6.8K J 1/16W	R444		RK73HB1J272J	CHIP R	2.7K J 1/16W
R330		RK73GB2A100J	CHIP R	10 J 1/10W	R445		RK73HB1J473J	CHIP R	47K J 1/16W
R331		RK73HB1J473J	CHIP R	47K J 1/16W	R446		RK73GB2A100J	CHIP R	10 J 1/10W
R332		RK73HB1J000J	CHIP R	0.0 J 1/16W	R447		RK73HB1J473J	CHIP R	47K J 1/16W
R333		RK73HB1J102J	CHIP R	1.0K J 1/16W	R448		RK73HB1J000J	CHIP R	0.0 J 1/16W
R334		RK73HB1J000J	CHIP R	0.0 J 1/16W	R449		RK73GB2A220J	CHIP R	22 J 1/10W
R338		RK73HB1J000J	CHIP R	0.0 J 1/16W	R450		RK73HB1J000J	CHIP R	0.0 J 1/16W
R339		RK73HB1J470J	CHIP R	47 J 1/16W	R501		RK73HB1J104J	CHIP R	100K J 1/16W
R340		RK73HB1J121J	CHIP R	120 J 1/16W	R503		RK73HB1J102J	CHIP R	1.0K J 1/16W
R341		RK73HB1J121J	CHIP R	120 J 1/16W	R504		RK73HB1J104J	CHIP R	100K J 1/16W
R343		RK73HB1J000J	CHIP R	0.0 J 1/16W	R506		RK73HB1J474J	CHIP R	470K J 1/16W
R344		RK73HB1J000J	CHIP R	0.0 J 1/16W	R507		RK73HB1J000J	CHIP R	0.0 J 1/16W
R344		RK73HB1J152J	CHIP R	1.5K J 1/16W	R509		RK73HB1J000J	CHIP R	0.0 J 1/16W
R345		RK73HB1J000J	CHIP R	0.0 J 1/16W	R510		RK73HB1J474J	CHIP R	470K J 1/16W
R346		RK73HB1J223J	CHIP R	22K J 1/16W	R511		RK73HB1J220J	CHIP R	22 J 1/16W
R352		RK73HB1J000J	CHIP R	0.0 J 1/16W	R512		RK73HB1J104J	CHIP R	100K J 1/16W
R353		RK73HB1J000J	CHIP R	0.0 J 1/16W	R514		RK73HB1J000J	CHIP R	0.0 J 1/16W
R354		RK73HB1J000J	CHIP R	0.0 J 1/16W	R515		RK73HB1J104J	CHIP R	100K J 1/16W
R360		RK73GB2A000J	CHIP R	0.0 J 1/10W	R516		RK73HB1J104J	CHIP R	100K J 1/16W
R401		RK73HH1J105D	CHIP R	1.0M D 1/16W	R520		RK73HB1J473J	CHIP R	47K J 1/16W
R402		RK73HB1J471J	CHIP R	470 J 1/16W	R521		RK73HB1J473J	CHIP R	47K J 1/16W
R403		RK73HH1J104D	CHIP R	100K D 1/16W	R522		RK73HB1J474J	CHIP R	470K J 1/16W
R404		RK73HB1J103J	CHIP R	10K J 1/16W	R523		RK73HB1J473J	CHIP R	47K J 1/16W
R405		RK73HH1J274D	CHIP R	270K D 1/16W	R524		RK73HB1J000J	CHIP R	0.0 J 1/16W
R406		RK73HH1J104D	CHIP R	100K D 1/16W	R525		RK73HB1J104J	CHIP R	100K J 1/16W
R407		RK73HB1J103J	CHIP R	10K J 1/16W	R527		RK73HB1J104J	CHIP R	100K J 1/16W
R408		RK73HB1J103J	CHIP R	10K J 1/16W	R528		RK73HB1J000J	CHIP R	0.0 J 1/16W
R409		RK73HB1J103J	CHIP R	10K J 1/16W	R529		RK73HB1J000J	CHIP R	0.0 J 1/16W
R410		RK73HB1J684J	CHIP R	680K J 1/16W	R531		RK73HB1J104J	CHIP R	100K J 1/16W
R411		RK73HB1J104J	CHIP R	100K J 1/16W	R532		RK73HB1J101J	CHIP R	100 J 1/16W
R413		RK73HB1J474J	CHIP R	470K J 1/16W	R533		RK73HB1J000J	CHIP R	0.0 J 1/16W
R415		RK73HB1J332J	CHIP R	3.3K J 1/16W	R534		RK73HB1J000J	CHIP R	0.0 J 1/16W
R417		RK73HB1J473J	CHIP R	47K J 1/16W	R536		RK73HB1J000J	CHIP R	0.0 J 1/16W
R418		RK73HB1J103J	CHIP R	10K J 1/16W	R537		RK73HB1J000J	CHIP R	0.0 J 1/16W
R420		RK73HB1J473J	CHIP R	47K J 1/16W	R538		RK73HB1J101J	CHIP R	100 J 1/16W
R421		RK73HB1J474J	CHIP R	470K J 1/16W	R539		RK73HB1J000J	CHIP R	0.0 J 1/16W
R422		RK73HB1J103J	CHIP R	10K J 1/16W	R540		RK73HB1J101J	CHIP R	100 J 1/16W
R423		RK73GB2A472J	CHIP R	4.7K J 1/10W	R541		RK73HB1J101J	CHIP R	100 J 1/16W
R425		RK73GB2A472J	CHIP R	4.7K J 1/10W	R542		RK73HB1J104J	CHIP R	100K J 1/16W
R426		RK73HB1J474J	CHIP R	470K J 1/16W	R543		RK73HB1J000J	CHIP R	0.0 J 1/16W
R428		RK73HB1J103J	CHIP R	10K J 1/16W	R544		RK73HB1J104J	CHIP R	100K J 1/16W
R429		RK73HB1J103J	CHIP R	10K J 1/16W	R545		RK73HB1J000J	CHIP R	0.0 J 1/16W
R430		RK73HH1J124D	CHIP R	120K D 1/16W	R548		RK73GB2A000J	CHIP R	0.0 J 1/10W
R431		RK73HH1J183D	CHIP R	18K D 1/16W	R550		RK73GB2A000J	CHIP R	0.0 J 1/10W
R432		RK73HH1J223D	CHIP R	22K D 1/16W	R551		RK73HB1J101J	CHIP R	100 J 1/16W
R433		RK73HB1J102J	CHIP R	1.0K J 1/16W	R552		RK73HB1J104J	CHIP R	100K J 1/16W
R434		RK73HB1J330J	CHIP R	33 J 1/16W	R553		RK73HB1J104J	CHIP R	100K J 1/16W
R435		RK73GB2A100J	CHIP R	10 J 1/10W	R554		RK73HB1J104J	CHIP R	100K J 1/16W

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R556		RK73HB1J104J	CHIP R	100K J 1/16W	R620		RK73HB1J102J	CHIP R	1.0K J 1/16W
R557		RK73HB1J104J	CHIP R	100K J 1/16W	R621		RK73HB1J000J	CHIP R	0.0 J 1/16W
R558		RK73HB1J104J	CHIP R	100K J 1/16W	R622		RK73HB1J102J	CHIP R	1.0K J 1/16W
R560		RK73HB1J000J	CHIP R	0.0 J 1/16W	R623		RK73HB1J104J	CHIP R	100K J 1/16W
R561		RK73HB1J473J	CHIP R	47K J 1/16W	R624		RK73HB1J104J	CHIP R	100K J 1/16W
R562		RK73GB2A000J	CHIP R	0.0 J 1/10W	R625		RK73HB1J104J	CHIP R	100K J 1/16W
R565		RK73GB2A000J	CHIP R	0.0 J 1/10W	R627		RK73HB1J104J	CHIP R	100K J 1/16W
R567		RK73HB1J151J	CHIP R	150 J 1/16W	R628		RK73HB1J104J	CHIP R	100K J 1/16W
R568		RK73HB1J102J	CHIP R	1.0K J 1/16W	R629		RK73HB1J105J	CHIP R	1.0M J 1/16W
R569		RK73HB1J220J	CHIP R	22 J 1/16W	R630		RK73HB1J102J	CHIP R	1.0K J 1/16W
R572		RK73HB1J220J	CHIP R	22 J 1/16W	R632		RK73HB1J103J	CHIP R	10K J 1/16W
R574		RK73GB2A000J	CHIP R	0.0 J 1/10W	R633		RK73HB1J000J	CHIP R	0.0 J 1/16W
R575		RK73HB1J103J	CHIP R	10K J 1/16W	R634		RK73HB1J103J	CHIP R	10K J 1/16W
R576		RK73HB1J000J	CHIP R	0.0 J 1/16W	R636		RK73HB1J000J	CHIP R	0.0 J 1/16W
R577		RK73HB1J102J	CHIP R	1.0K J 1/16W	R637		RK73HB1J103J	CHIP R	10K J 1/16W
R578		RK73HB1J000J	CHIP R	0.0 J 1/16W	R638		RK73HB1J104J	CHIP R	100K J 1/16W
R579		RK73HB1J000J	CHIP R	0.0 J 1/16W	R639		RK73HB1J102J	CHIP R	1.0K J 1/16W
R580		RK73HB1J000J	CHIP R	0.0 J 1/16W	R640		RK73HB1J103J	CHIP R	10K J 1/16W
R581		RK73HB1J474J	CHIP R	470K J 1/16W	R641		RK73HB1J104J	CHIP R	100K J 1/16W
R582		RK73HB1J000J	CHIP R	0.0 J 1/16W	R642		RK73HB1J104J	CHIP R	100K J 1/16W
R583		RK73HB1J000J	CHIP R	0.0 J 1/16W	R644		RK73GB2A000J	CHIP R	0.0 J 1/10W
R584		RK73HB1J000J	CHIP R	0.0 J 1/16W	R646		RK73HB1J682J	CHIP R	6.8K J 1/16W
R585		RK73HB1J000J	CHIP R	0.0 J 1/16W	R648		RK73HB1J682J	CHIP R	6.8K J 1/16W
R586		RK73HB1J000J	CHIP R	0.0 J 1/16W	R650		RK73GB2A000J	CHIP R	0.0 J 1/10W
R587		RK73HB1J102J	CHIP R	1.0K J 1/16W	R651		RK73FB2B102J	CHIP R	1.0K J 1/8W
R588		RK73HB1J000J	CHIP R	0.0 J 1/16W	R652		RK73HB1J104J	CHIP R	100K J 1/16W
R589		RK73HB1J000J	CHIP R	0.0 J 1/16W	R654		RK73GB2A000J	CHIP R	0.0 J 1/10W
R590		RK73HB1J000J	CHIP R	0.0 J 1/16W	R656		RK73HB1J471J	CHIP R	470 J 1/16W
R591		RK73HB1J102J	CHIP R	1.0K J 1/16W	R658		RK73GB2A000J	CHIP R	0.0 J 1/10W
R592		RK73HB1J000J	CHIP R	0.0 J 1/16W	R659		RK73HB1J104J	CHIP R	100K J 1/16W
R593		RK73HB1J000J	CHIP R	0.0 J 1/16W	R660		RK73HB1J104J	CHIP R	100K J 1/16W
R594		RK73HB1J102J	CHIP R	1.0K J 1/16W	R661		RK73HB1J104J	CHIP R	100K J 1/16W
R595		RK73HB1J000J	CHIP R	0.0 J 1/16W	R662		RK73HB1J474J	CHIP R	470K J 1/16W
R596		RK73HB1J104J	CHIP R	100K J 1/16W	R663		RK73HB1J474J	CHIP R	470K J 1/16W
R597		RK73HB1J102J	CHIP R	1.0K J 1/16W	R664		RK73HB1J104J	CHIP R	100K J 1/16W
R598		RK73FB2B102J	CHIP R	1.0K J 1/8W	R665		RK73HB1J104J	CHIP R	100K J 1/16W
R599		RK73FB2B102J	CHIP R	1.0K J 1/8W	R666		RK73HB1J104J	CHIP R	100K J 1/16W
R600		RK73FB2B102J	CHIP R	1.0K J 1/8W	R667		RK73HB1J104J	CHIP R	100K J 1/16W
R601		RK73FB2B102J	CHIP R	1.0K J 1/8W	R668		RK73HB1J104J	CHIP R	100K J 1/16W
R602		RK73HB1J102J	CHIP R	1.0K J 1/16W	R669		RK73HB1J104J	CHIP R	100K J 1/16W
R603		RK73HB1J000J	CHIP R	0.0 J 1/16W	R670		RK73HB1J104J	CHIP R	100K J 1/16W
R604		RK73HB1J000J	CHIP R	0.0 J 1/16W	R671		RK73HB1J104J	CHIP R	100K J 1/16W
R605		RK73HB1J102J	CHIP R	1.0K J 1/16W	R672		RK73HB1J104J	CHIP R	100K J 1/16W
R606		RK73HB1J103J	CHIP R	10K J 1/16W	R673		RK73HB1J104J	CHIP R	100K J 1/16W
R607		RK73HB1J102J	CHIP R	1.0K J 1/16W	R674		RK73HB1J104J	CHIP R	100K J 1/16W
R608		RK73HB1J102J	CHIP R	1.0K J 1/16W	R676		RK73HB1J104J	CHIP R	100K J 1/16W
R610		RK73HB1J102J	CHIP R	1.0K J 1/16W	R677		RK73HB1J474J	CHIP R	470K J 1/16W
R611		RK73HB1J105J	CHIP R	1.0M J 1/16W	R678		RK73HB1J104J	CHIP R	100K J 1/16W
R612		RK73HB1J105J	CHIP R	1.0M J 1/16W	R680		RK73HB1J102J	CHIP R	1.0K J 1/16W
R614		RK73HB1J474J	CHIP R	470K J 1/16W	R681		RK73HB1J102J	CHIP R	1.0K J 1/16W
R615		RK73HB1J000J	CHIP R	0.0 J 1/16W	R682		RK73HB1J102J	CHIP R	1.0K J 1/16W
R616		RK73HB1J000J	CHIP R	0.0 J 1/16W	R683		RK73HB1J102J	CHIP R	1.0K J 1/16W
R617		RK73HB1J102J	CHIP R	1.0K J 1/16W	R684		RK73HB1J104J	CHIP R	100K J 1/16W
R618		RK73HB1J102J	CHIP R	1.0K J 1/16W	R685		RK73HB1J104J	CHIP R	100K J 1/16W
R619		RK73HB1J102J	CHIP R	1.0K J 1/16W	R686		RK73HB1J104J	CHIP R	100K J 1/16W

NX-800/800H

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R687		RK73HB1J472J	CHIP R	4.7K J 1/16W	R756		RK73HB1J153J	CHIP R	15K J 1/16W
R688		RK73HB1J472J	CHIP R	4.7K J 1/16W	R758		RK73HB1J103J	CHIP R	10K J 1/16W
R689		RK73HB1J474J	CHIP R	470K J 1/16W	R759		RK73HB1J104J	CHIP R	100K J 1/16W
R690		RK73HB1J474J	CHIP R	470K J 1/16W	R760		RK73HB1J152J	CHIP R	1.5K J 1/16W
R691		RK73HB1J223J	CHIP R	22K J 1/16W	R761		RK73HB1J104J	CHIP R	100K J 1/16W
R692		RK73HB1J104J	CHIP R	100K J 1/16W	R761		RK73HB1J683J	CHIP R	68K J 1/16W
R693		RK73HB1J104J	CHIP R	100K J 1/16W	R762		RK73HB1J334J	CHIP R	330K J 1/16W
R694		RK73HB1J104J	CHIP R	100K J 1/16W	R762		RK73HB1J474J	CHIP R	470K J 1/16W
R695		RK73HB1J104J	CHIP R	100K J 1/16W	R763		RK73HB1J183J	CHIP R	18K J 1/16W
R696		RK73HB1J104J	CHIP R	100K J 1/16W	R764		RK73HB1J124J	CHIP R	120K J 1/16W
R697		RK73HB1J000J	CHIP R	0.0 J 1/16W	R765		RK73HB1J102J	CHIP R	1.0K J 1/16W
R698		RK73HB1J000J	CHIP R	0.0 J 1/16W	R766		RK73HB1J104J	CHIP R	100K J 1/16W
R701		RK73HB1J104J	CHIP R	100K J 1/16W	R767		RK73HB1J473J	CHIP R	47K J 1/16W
R703		RK73HB1J103J	CHIP R	10K J 1/16W	R768		RK73HB1J473J	CHIP R	47K J 1/16W
R704		RK73HB1J563J	CHIP R	56K J 1/16W	R769		RK73HB1J472J	CHIP R	4.7K J 1/16W
R705		RK73HB1J104J	CHIP R	100K J 1/16W	R770		RK73HB1J563J	CHIP R	56K J 1/16W
R706		RK73HB1J333J	CHIP R	33K J 1/16W	R771		RK73HB1J104J	CHIP R	100K J 1/16W
R707		RK73HB1J153J	CHIP R	15K J 1/16W	R772		RK73HB1J123J	CHIP R	12K J 1/16W
R708		RK73HB1J683J	CHIP R	68K J 1/16W	R773		RK73HB1J684J	CHIP R	680K J 1/16W
R709		RK73HB1J822J	CHIP R	8.2K J 1/16W	R774		RK73HB1J474J	CHIP R	470K J 1/16W
R710		RK73HB1J104J	CHIP R	100K J 1/16W	R775		RK73HB1J823J	CHIP R	82K J 1/16W
R712		RK73HB1J683J	CHIP R	68K J 1/16W	R776		RK73HB1J334J	CHIP R	330K J 1/16W
R713		RK73HB1J563J	CHIP R	56K J 1/16W	R777		RK73HB1J154J	CHIP R	150K J 1/16W
R714		RK73HB1J104J	CHIP R	100K J 1/16W	R778		RK73HB1J394J	CHIP R	390K J 1/16W
R715		RK73HB1J473J	CHIP R	47K J 1/16W	R779		RK73HB1J474J	CHIP R	470K J 1/16W
R716		RK73HB1J000J	CHIP R	0.0 J 1/16W	R780		RK73HB1J104J	CHIP R	100K J 1/16W
R718		RK73HB1J000J	CHIP R	0.0 J 1/16W	R781		RK73HB1J104J	CHIP R	100K J 1/16W
R720		RK73HB1J104J	CHIP R	100K J 1/16W	R782		RK73HB1J153J	CHIP R	15K J 1/16W
R721		RK73HB1J222J	CHIP R	2.2K J 1/16W	R783		RK73HB1J000J	CHIP R	0.0 J 1/16W
R722		RK73HB1J683J	CHIP R	68K J 1/16W	R784		RK73HB1J154J	CHIP R	150K J 1/16W
R723		RK73HB1J000J	CHIP R	0.0 J 1/16W	R785		RK73HB1J103J	CHIP R	10K J 1/16W
R724		RK73HB1J563J	CHIP R	56K J 1/16W	R786		RK73HB1J393J	CHIP R	39K J 1/16W
R725		RK73HB1J683J	CHIP R	68K J 1/16W	R787		RK73HB1J274J	CHIP R	270K J 1/16W
R726		RK73HB1J100J	CHIP R	10 J 1/16W	R788		RK73HB1J223J	CHIP R	22K J 1/16W
R727		RK73HB1J274J	CHIP R	270K J 1/16W	R789		RK73HB1J000J	CHIP R	0.0 J 1/16W
R728		RK73HB1J000J	CHIP R	0.0 J 1/16W	R790		RK73HB1J224J	CHIP R	220K J 1/16W
R729		RK73HB1J104J	CHIP R	100K J 1/16W	R791		RK73HB1J564J	CHIP R	560K J 1/16W
R731		RK73HB1J000J	CHIP R	0.0 J 1/16W	R792		RK73HB1J102J	CHIP R	1.0K J 1/16W
R732		RK73HB1J473J	CHIP R	47K J 1/16W	R793		RK73HB1J000J	CHIP R	0.0 J 1/16W
R737		RK73HB1J473J	CHIP R	47K J 1/16W	R794		RK73HB1J000J	CHIP R	0.0 J 1/16W
R738		RK73HB1J102J	CHIP R	1.0K J 1/16W	R795		RK73HB1J224J	CHIP R	220K J 1/16W
R739		RK73HB1J000J	CHIP R	0.0 J 1/16W	R796		RK73HB1J103J	CHIP R	10K J 1/16W
R740		RK73HB1J104J	CHIP R	100K J 1/16W	R797		RK73HB1J334J	CHIP R	330K J 1/16W
R741		RK73HB1J104J	CHIP R	100K J 1/16W	R798		RK73HB1J684J	CHIP R	680K J 1/16W
R744		RK73HB1J473J	CHIP R	47K J 1/16W	R799		RK73HB1J563J	CHIP R	56K J 1/16W
R745		RK73HB1J104J	CHIP R	100K J 1/16W	R800		RK73HB1J472J	CHIP R	4.7K J 1/16W
R746		RK73HB1J103J	CHIP R	10K J 1/16W	R801		RK73HB1J104J	CHIP R	100K J 1/16W
R747		RK73HB1J334J	CHIP R	330K J 1/16W	R802		RK73HB1J273J	CHIP R	27K J 1/16W
R748		RK73HB1J000J	CHIP R	0.0 J 1/16W	R803		RK73HB1J153J	CHIP R	15K J 1/16W
R749		RK73HB1J823J	CHIP R	82K J 1/16W	R804		RK73HB1J681J	CHIP R	680 J 1/16W
R750		RK73HB1J332J	CHIP R	3.3K J 1/16W	R805		RK73HB1J823J	CHIP R	82K J 1/16W
R751		RK73HB1J271J	CHIP R	270 J 1/16W	R806		RK73HB1J562J	CHIP R	5.6K J 1/16W
R752		RK73HB1J102J	CHIP R	1.0K J 1/16W	R807		RK73HB1J103J	CHIP R	10K J 1/16W
R753		RK73HB1J563J	CHIP R	56K J 1/16W	R808		RK73HB1J103J	CHIP R	10K J 1/16W
R755		RK73HB1J103J	CHIP R	10K J 1/16W	R809		RK73HB1J104J	CHIP R	100K J 1/16W

PARTS LIST

TX-RX UINT (X57-8900-XX)
TX-RX UINT (XC1-0990-10)

Ref. No.	Address	Parts No.	Description	Desti- nation
R810		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R812		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R813		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R814		RK73HB1J104J	CHIP R 100K J 1/16W	
R815		RK73HB1J104J	CHIP R 100K J 1/16W	
R816		RK73HB1J104J	CHIP R 100K J 1/16W	
R817		RK73HB1J473J	CHIP R 47K J 1/16W	
R818		RK73HB1J333J	CHIP R 33K J 1/16W	
R819		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R820		RK73HB1J474J	CHIP R 470K J 1/16W	
R821		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R822		RK73HB1J101J	CHIP R 100 J 1/16W	
R823		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R825		RK73HB1J103J	CHIP R 10K J 1/16W	
R826		RK73HB1J103J	CHIP R 10K J 1/16W	
R827		RK73HB1J332J	CHIP R 3.3K J 1/16W	
R828		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R831		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R833		RK73HB1J101J	CHIP R 100 J 1/16W	
R834		RK73HB1J101J	CHIP R 100 J 1/16W	
R835		RK73HB1J101J	CHIP R 100 J 1/16W	
R836		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R837		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R838		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R841		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R842		RK73FB2B102J	CHIP R 1.0K J 1/8W	
R843		RK73HB1J471J	CHIP R 470 J 1/16W	
R845		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R846		RK73HB1J332J	CHIP R 3.3K J 1/16W	
R847		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R850		RK73GB2A000J	CHIP R 0.0 J 1/10W	HK3
R901		RK73GB2A471J	CHIP R 470 J 1/10W	
R902		RK73HB1J101J	CHIP R 100 J 1/16W	
R903		RK73HB1J101J	CHIP R 100 J 1/16W	
R904		RK73HB1J471J	CHIP R 470 J 1/16W	
R905		RK73HB1J471J	CHIP R 470 J 1/16W	
R906		RK73HB1J471J	CHIP R 470 J 1/16W	
R907		RK73HB1J471J	CHIP R 470 J 1/16W	
R908		RK73HB1J471J	CHIP R 470 J 1/16W	
R909		RK73HB1J471J	CHIP R 470 J 1/16W	
R910		RK73HB1J471J	CHIP R 470 J 1/16W	
R911		RK73HB1J471J	CHIP R 470 J 1/16W	
R912		RK73HB1J471J	CHIP R 470 J 1/16W	
R913		RK73HB1J471J	CHIP R 470 J 1/16W	
R914		RK73GB2A471J	CHIP R 470 J 1/10W	
R915		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R916		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R917		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R918		RK73HB1J101J	CHIP R 100 J 1/16W	
R919		RK73HB1J101J	CHIP R 100 J 1/16W	
R920		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R921		RK73HB1J474J	CHIP R 470K J 1/16W	
R922		RK73HB1J000J	CHIP R 0.0 J 1/16W	HK2,HK3,HK
R923		RK73HB1J473J	CHIP R 47K J 1/16W	HK3
R924		RK73HB1J000J	CHIP R 0.0 J 1/16W	

Ref. No.	Address	Parts No.	Description	Desti- nation
TH101		ERTJOV104H	THERMISTOR	K2 K,HK2,HK3,HK
TH103		ERTJOV104H	THERMISTOR	
TH102		ERTJOV104H	THERMISTOR	
TH701		ERTJOV104H	THERMISTOR	
X1		L77-3016-05	TCXO (19.2M)	
X501		L77-1802-05	CRYSTAL RESONATOR(32768HZ)	
X502		L77-3015-05	TCXO (18.432M)	
XF202		L71-0649-05	MCF (58.05MHZ)	

NX-800/800H

ADJUSTMENT

NX-800/800H(K,K2) Receiver Section

Item	Condition		Measurement			Adjustment			Specifications / Remarks
	Panel test mode	PC test mode	Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. AF level setting	[Panel test mode] 1) CH-Sig: 1-1 SSG output: -47dBm (1mV) (MOD: 1kHz, Dev: ±1.5kHz)	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 SSG output: -47dBm (1mV) (MOD: 1kHz, Dev: ±1.5kHz)	SSG DVM AF VTVM Dummy load (4Ω)		ANT Ext.SP connector		[Panel tuning mode] [↵],[↶] [PC test mode] [◀],[▶] (Volum Button in PC test mode screen)	Volume Up/Down knob to obtain 2.83V AF output. (2.0W @ 4Ω load)	2.83V±0.3V
2. Sensitivity 2 Adjust (BPF adjust)	1) Adj item: [SENS2] Adjust: [***] 2) Adj item: [L SENS2]→ [L' SENS2]→ [C SENS2]→ [H' SENS2]→ [H SENS2] Adjust: [***] Press [<] key to store the adjustment value.	1) Adj item: [Sensitivity 2] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.					[Panel tuning mode] [↵],[↶] [PC test mode] [◀],[▶] Write the value as followings (Fixed). [L SENS2] / [Low] : 60 K, HK 50 K2, HK2 [L' SENS2] / [Low'] : 95 K, HK 88 K2, HK2 K2, HK2 [C SENS2] / [Center] : 130 K, HK, 125 K2, HK2 [H' SENS2] / [High'] : 165 K, HK, 174 K2, HK2 [H SENS2] / [High] : 200 K, HK, 222 K2, HK2	Write the value as followings (Fixed). [L SENS2] / [Low] : 60 K, HK 50 K2, HK2 [L' SENS2] / [Low'] : 95 K, HK 88 K2, HK2 K2, HK2 [C SENS2] / [Center] : 130 K, HK, 125 K2, HK2 [H' SENS2] / [High'] : 165 K, HK, 174 K2, HK2 [H SENS2] / [High] : 200 K, HK, 222 K2, HK2	Variable-Capacitor Tune voltage is adjusted. (Output voltage adjustment of IC205)
3. Sensitivity 1 Adjust (BPF adjust)	1) Adj item: [SENS1] Adjust: [***] 2) Adj item: [L SENS1]→ [L' SENS1]→ [C SENS1]→ [H' SENS1]→ [H SENS1] Adjust: [***] Press [<] key to store the adjustment value.	1) Adj item: [Sensitivity 1] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.					Write the value as followings (typical value). [L SENS2] / [Low] : 80 K, HK 71 K2, HK2 (Fixed) [L' SENS2] / [Low'] : 120 K, HK 107 K2, HK2 (Fixed) [C SENS2] / [Center] : 150 K, HK 138 K2, HK2 (Fixed) [H' SENS2] / [High'] : 180 K, HK 157 K2, HK2 (Fixed) [H SENS2] / [High] : 200 K, HK 180 K2, HK2 (Preset)	Write the value as followings (typical value). [L SENS2] / [Low] : 80 K, HK 71 K2, HK2 (Fixed) [L' SENS2] / [Low'] : 120 K, HK 107 K2, HK2 (Fixed) [C SENS2] / [Center] : 150 K, HK 138 K2, HK2 (Fixed) [H' SENS2] / [High'] : 180 K, HK 157 K2, HK2 (Fixed) [H SENS2] / [High] : 200 K, HK 180 K2, HK2 (Preset)	Variable-Capacitor Tune voltage is adjusted. (Output voltage adjustment of IC206) If sensitivity is low, fine-tune the value. [H SENS1] / [High] Check Sens1 FH(Narrow) RX Sensitivity >12dB at SSG output: -118.5dBm (0.266uV). If RX Sensitivity Out of Specification, set SSG output: -90dBm (7.08uV), FM:1.5kHz, Align Sens 1 FH to the last RSSI peak, and -30 digit shift from the last RSSI peak.


ADJUSTMENT

NX-800H(K3) Receiver Section

Item	Condition		Measurement			Adjustment			Specifications / Remarks
	Panel test mode	PC test mode	Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. AF level setting	[Panel test mode] 1) CH-Sig: 1-1 SSG output: -47dBm (1mV) (MOD: 1kHz, Dev: ±1.5kHz)	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 SSG output: -47dBm (1mV) (MOD: 1kHz, Dev: ±1.5kHz)	SSG DVM AF VTVM Dummy load (4Ω)		ANT Ext.SP connector		[Panel tuning mode] [↵],[↻] [PC test mode] [◀],[▶] (Volum Button in PC test mode screen)	Volume Up/Down knob to obtain 2.83V AF output. (2.0W @ 4Ω load)	2.83V±0.3V
2. Sensitivity 2 Adjust (BPF adjust)	1) Adj item: [SENS2] Adjust: [***] 2) Adj item: [L SENS2]→ [L' SENS2]→ [C SENS2]→ [H' SENS2]→ [H SENS2] Adjust: [***] Press [◀] key to store the adjustment value.	1) Adj item: [Sensitivity 2] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.					[Panel tuning mode] [↵],[↻] [PC test mode] [◀],[▶] Write the value as followings (Fixed). [L SENS2] / [Low] : 45 [L' SENS2] / [Low'] : 70 [C SENS2] / [Center] : 120 [H' SENS2] / [High'] : 170 [H SENS2] / [High] : 225	Variable-Capacitor Tune voltage is adjusted. (Output voltage adjustment of IC205)	
3. Sensitivity 1 Adjust (BPF adjust)	1) Adj item: [SENS1] Adjust: [***] 2) Adj item: [L SENS1]→ [L' SENS1]→ [C SENS1]→ [H' SENS1]→ [H SENS1] Adjust: [***] Press [◀] key to store the adjustment value.	1) Adj item: [Sensitivity 1] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.					Write the value as followings (typical value). [L SENS1] / [Low] : 49 (Fixed) [L' SENS1] / [Low'] : 76 (Fixed) [C SENS1] / [Center] : 113 (Fixed) [H' SENS1] / [High'] : 147 (Fixed) [H SENS1] / [High] : 182 (Preset)	Variable-Capacitor Tune voltage is adjusted. (Output voltage adjustment of IC206) If sensitivity is low, fine-tune the value. [H SENS1] / [High] Check Sens1 FH(Narrow) RX Sensitivity >12dB at SSG output: -118dBm (0.28uV). If RX Sensitivity Out of Specification, set SSG output: -90dBm (7.08uV), FM: 1.5kHz, Align Sens 1 FH to the last RSSI peak, and -30 digit shift from the last RSSI peak.	

NX-800/800H PC BOARD

TX-RX UNIT (X57-8900-XX) (A/2) -10: K, -11: HK, -13: HK2
TX-RX UNIT (XC1-0990-10) (A/2) : K2
Component side view (J79-0239-29 A/2)

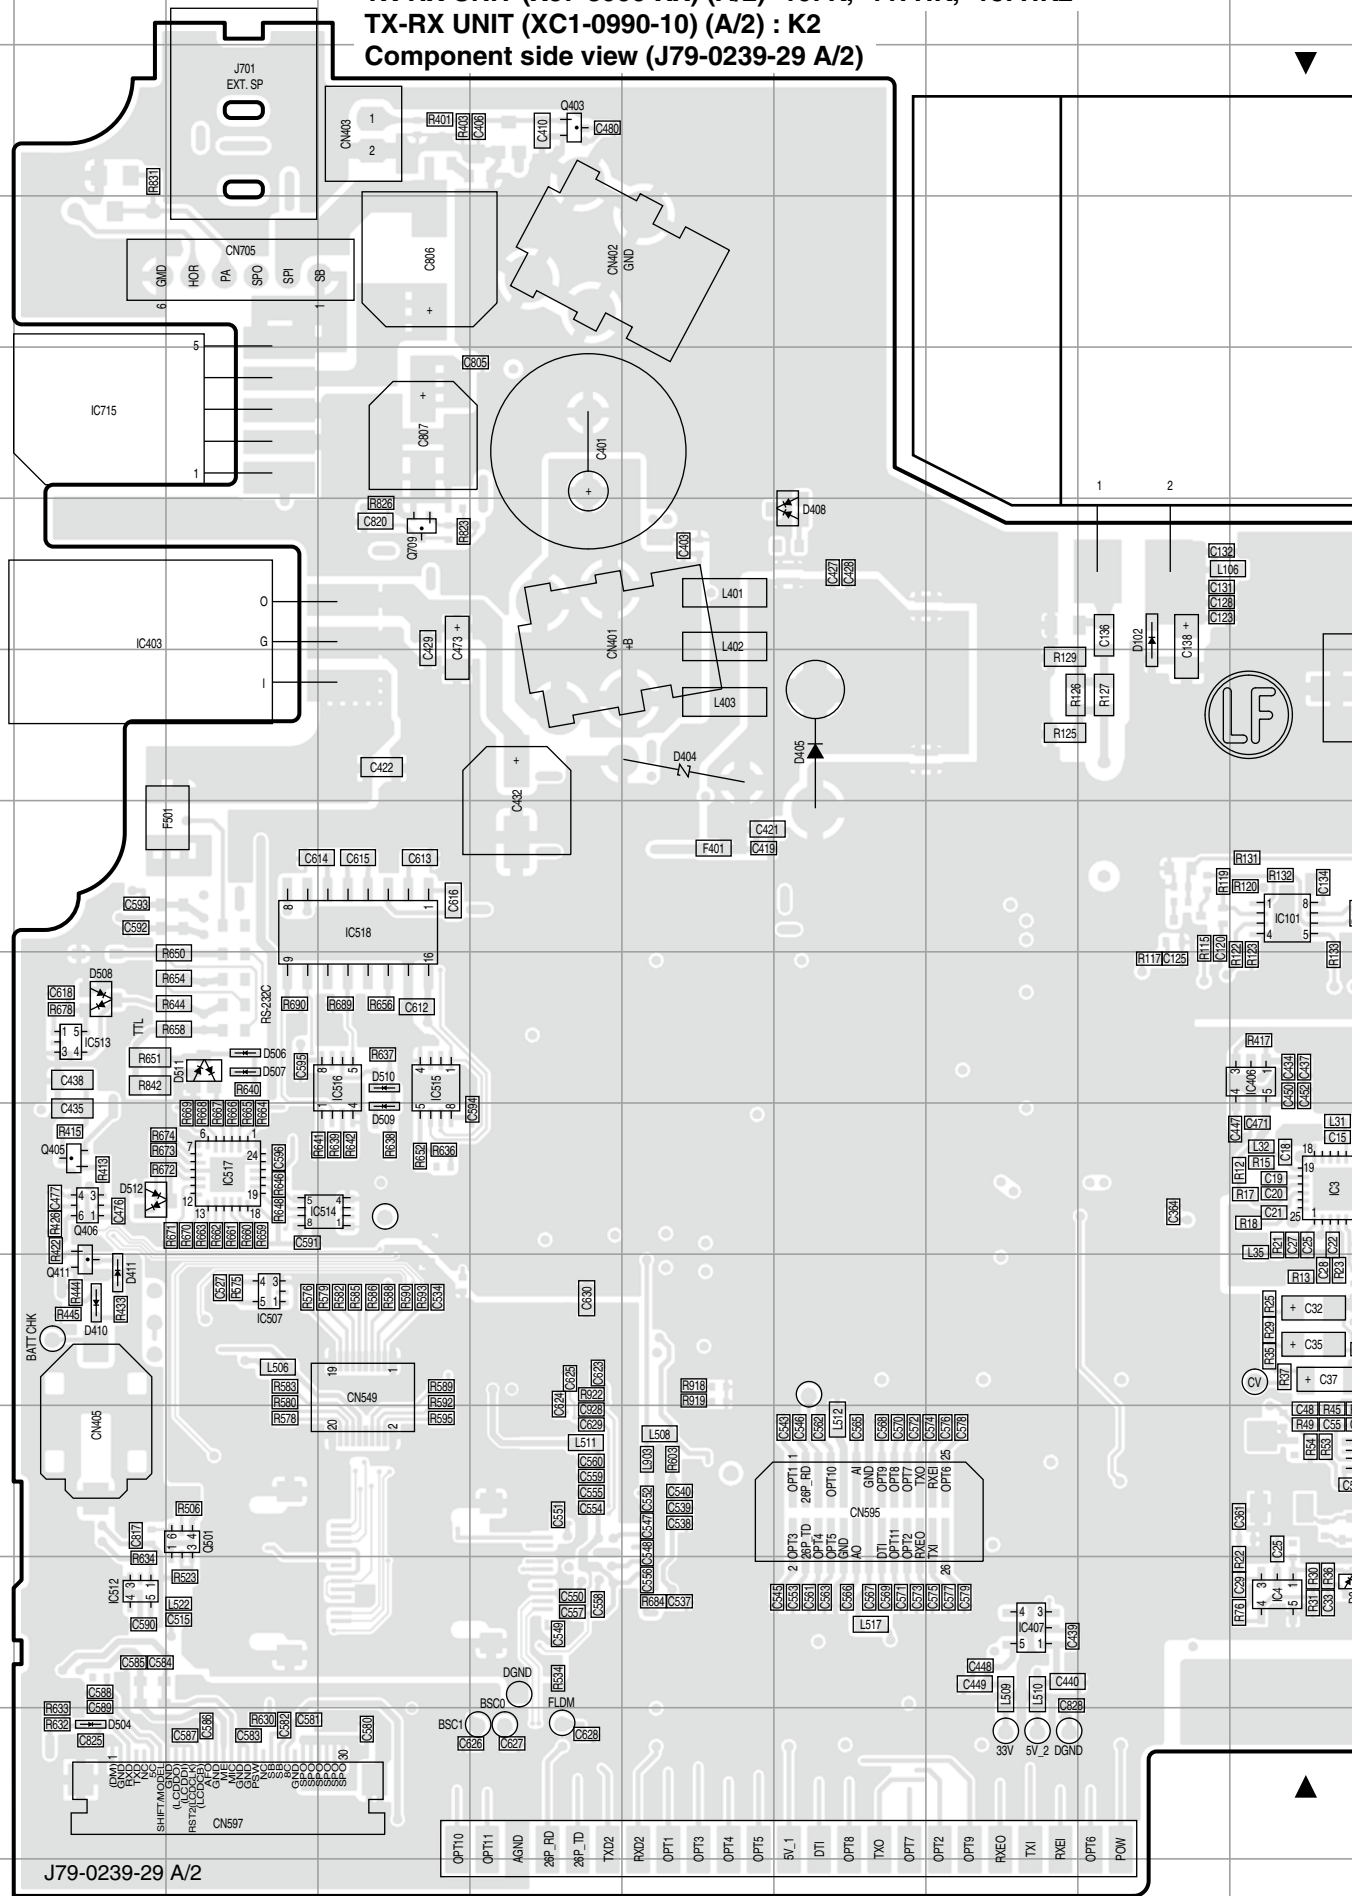


OPT10	OPT11	AGND	2P- RD	2P- TD	TXD2	RXD2	OPT1	OPT3	OPT4	OPT5	5V_1	DTI	OPT8	TXO	OPT7	OPT2	OPT9	RXEO	TXI	RXEI	OPT6	POW
-------	-------	------	--------	--------	------	------	------	------	------	------	------	-----	------	-----	------	------	------	------	-----	------	------	-----


J79-0239-29 A/2

PC BOARD NX-800/800H

TX-RX UNIT (X57-8900-XX) (A/2) -10: K, -11: HK, -13: HK2
 TX-RX UNIT (XC1-0990-10) (A/2) : K2
 Component side view (J79-0239-29 A/2)

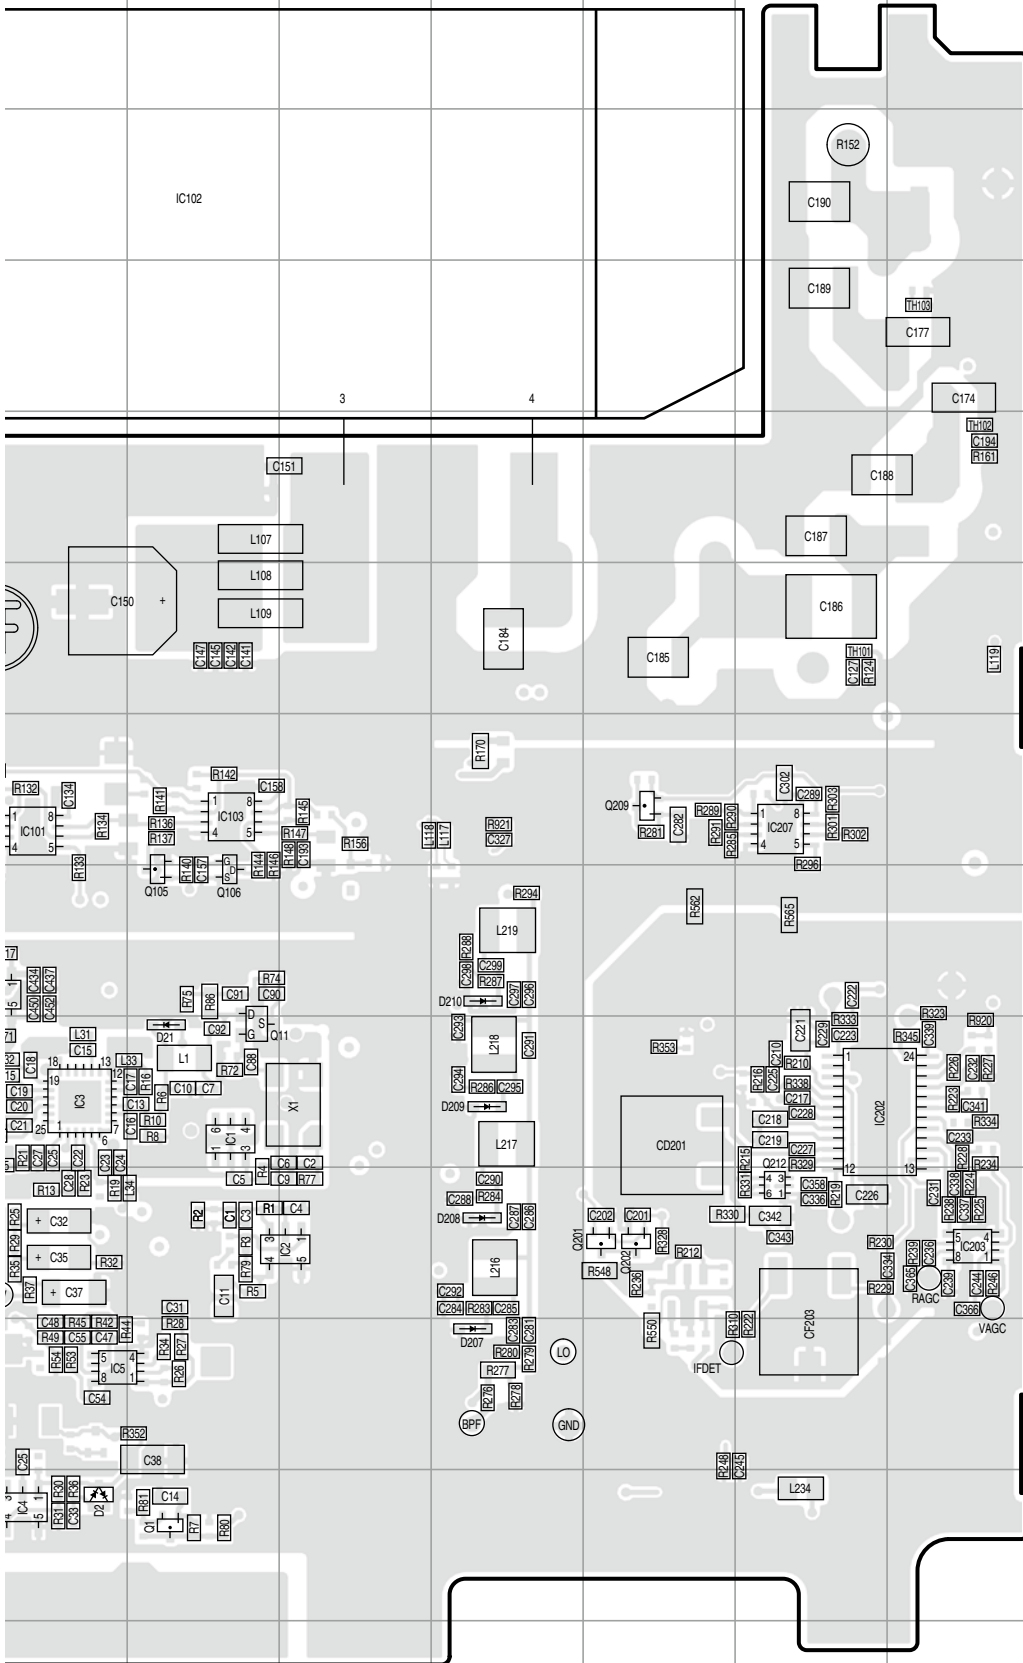


Ref. No.	Address	Ref. No.	Address
IC1	9K	Q209	7N
IC2	10L	Q212	10O
IC3	9J	Q403	2E
IC4	12J	Q405	9B
IC5	11J	Q406	9B
IC101	7J	Q411	10B
IC102	3K	Q501	11C
IC103	7K	Q709	5D
IC202	9O	D2	12J
IC203	10P	D21	9K
IC207	7O	D102	5I
IC403	5B	D207	11M
IC406	8J	D208	10M
IC407	12H	D209	9M
IC507	10C	D210	8M
IC512	12B	D404	6F
IC513	8B	D405	6G
IC514	9D	D408	5G
IC515	8D	D410	10B
IC516	8D	D411	10B
IC517	9C	D504	13B
IC518	7D	D506	8C
IC715	4B	D507	8C
Q1	12K	D508	8B
Q11	9K	D509	9D
Q105	8K	D510	8D
Q106	8K	D511	8C
Q201	10N	D512	9B
Q202	10N		




NX-800/800H PC BOARD

TX-RX UNIT (X57-8900-XX) (A/2) -10: K, -11: HK, -13: HK2
 TX-RX UNIT (XC1-0990-10) (A/2) : K2
 Foil side view (J79-0239-29 A/2)

Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC204	11F	Q7	10K	D9	11H
IC401	7M	Q8	10J	D10	11I
IC402	6N	Q9	10I	D11	11J
IC404	6P	Q10	10I	D12	11I
IC405	5N	Q101	7I	D14	11J
IC408	5M	Q102	7J	D101	9H
IC409	7N	Q203	8E	D103	5F
IC410	12J	Q204	9D	D104	6F
IC501	12P	Q205	10D	D106	6E
IC502	10Q	Q208	10G	D108	6D
IC503	12Q	Q210	7G	D109	5D
IC504	10N	Q401	3P	D110	4D
IC505	10P	Q402	4P	D201	10E
IC506	13P	Q404	4P	D202	10F
IC508	10O	Q407	5P	D205	9H
IC509	9P	Q409	7O	D212	7E
IC510	12O	Q410	7N	D213	7E
IC511	9O	Q412	6N	D216	7D
IC701	12M	Q413	5P	D401	3O
IC702	8N	Q415	7O	D403	4P
IC703	12L	Q416	5N	D406	3P
IC705	12L	Q417	12I	D407	4N
IC706	8M	Q701	12K	D409	4N
IC707	12M	Q702	11L	D412	5N
IC708	8N	Q703	12M	D501	13O
IC709	8O	Q704	7P	D502	13O
IC710	11M	Q705	8P	D503	9O
IC711	11L	Q706	8R	D702	11L
IC712	9L	Q707	8R	D703	11L
IC713	11K	Q708	10L	D704	7O
IC714	11L	Q710	5Q	D705	8O
Q3	9I	D3	11I	D706	9L
Q4	9J	D4	11J	D707	9M
Q5	10I	D7	11H		
Q6	10J	D8	11J		

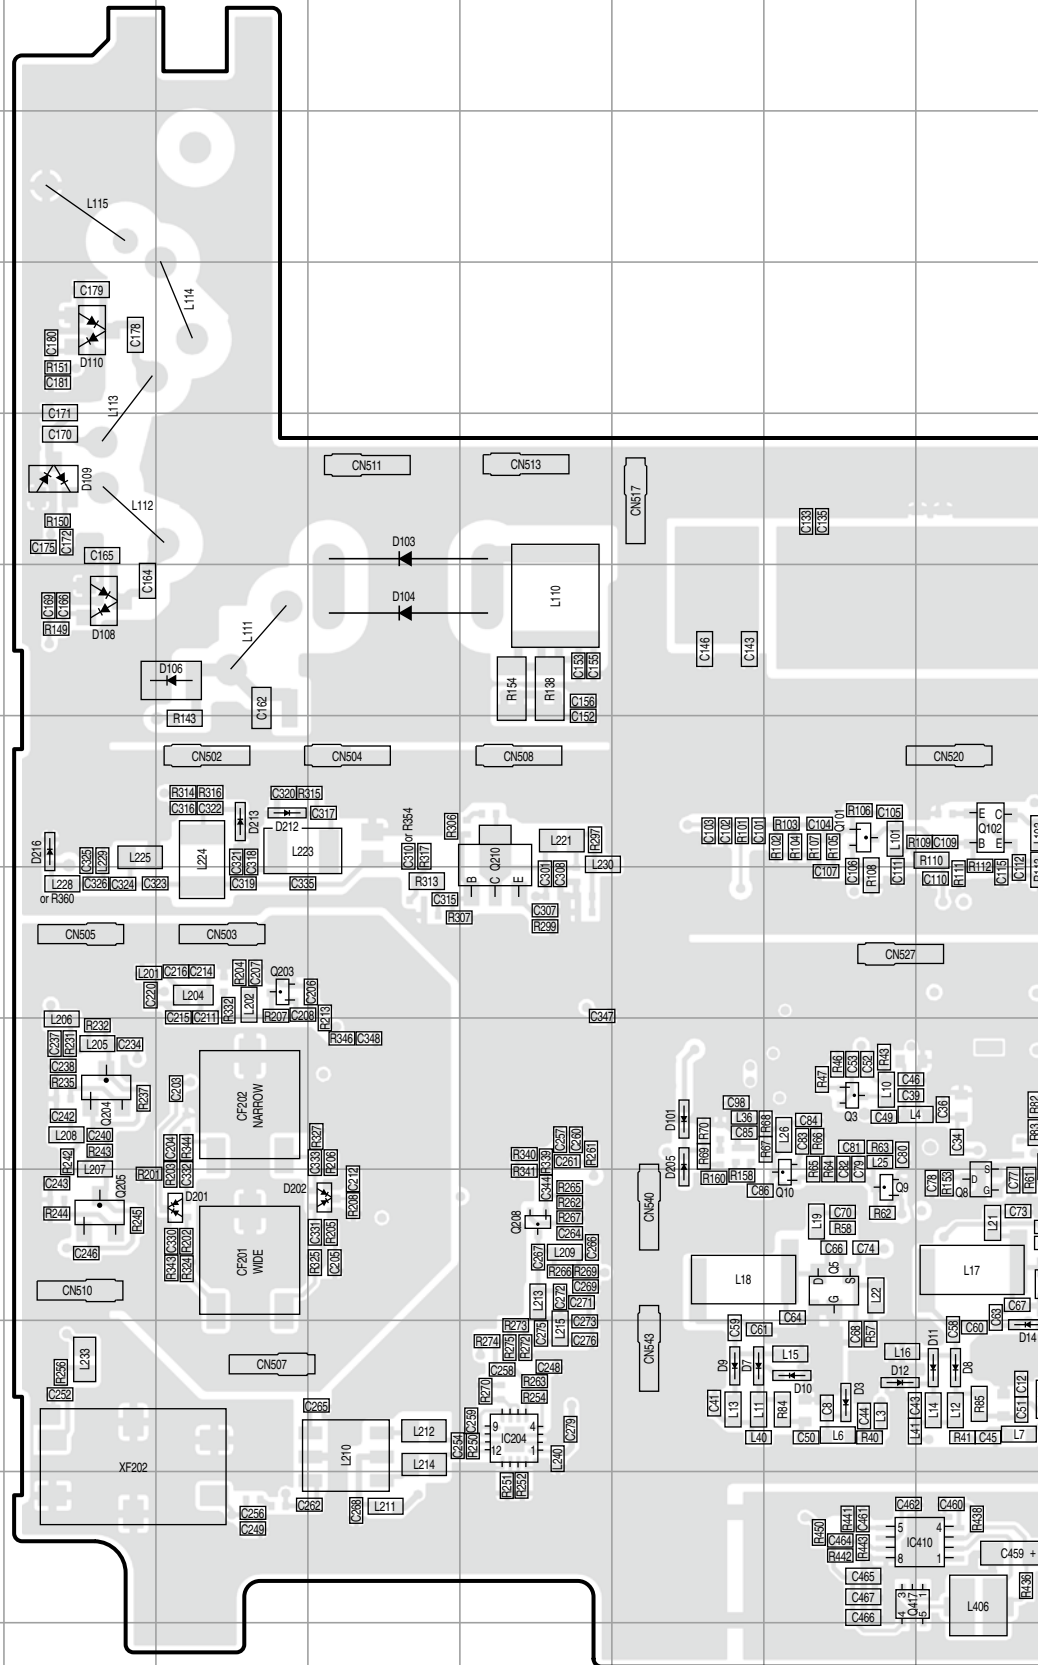



Component side



Foil side



NX-800/800H PC BOARD

TX-RX UNIT (X57-8900-XX) (B/2) -10: K, -11: HK, -13: HK2
 TX-RX UNIT (XC1-0990-10) (B/2) : K2
 Component side view (J79-0239-29 B/2)

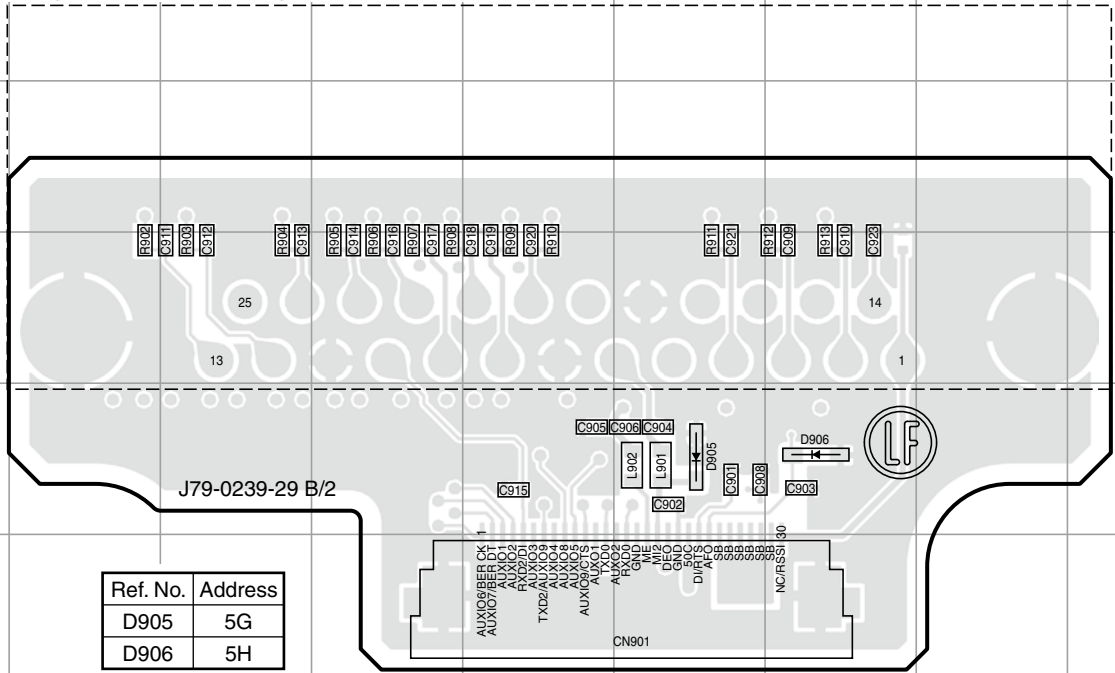

Ref. No.	Address
D905	5G
D906	5H

TX-RX UNIT (X57-8900-XX) (B/2) -10: K, -11: HK, -13: HK2
 TX-RX UNIT (XC1-0990-10) (B/2) : K2
 Foil side view (J79-0239-29 B/2)

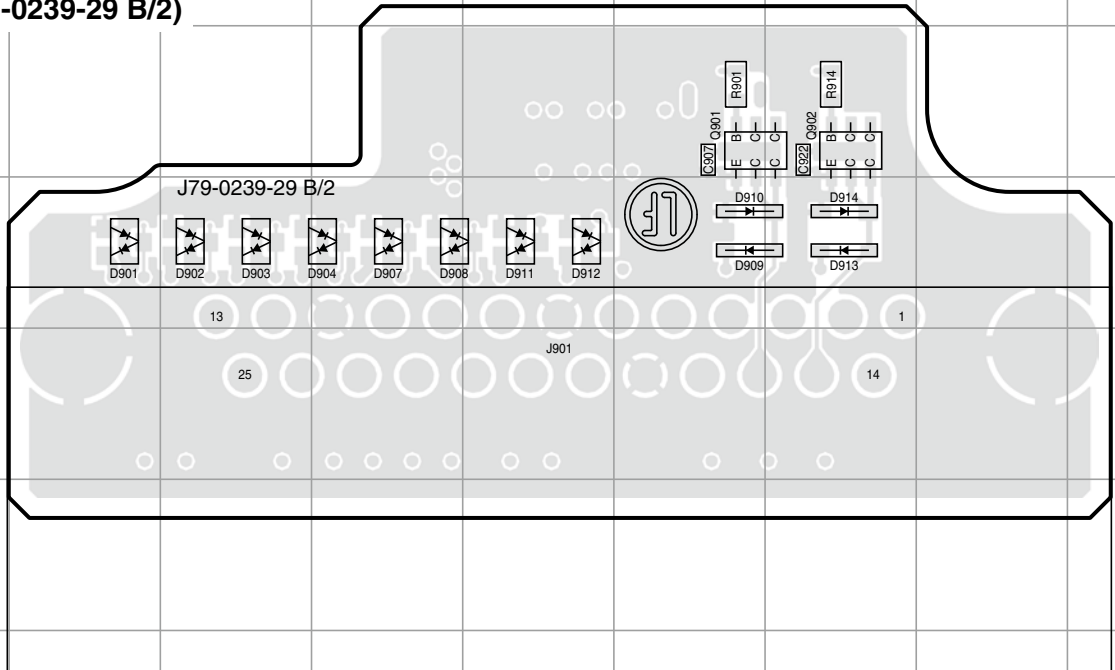


Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
Q901	8G	D904	9E	D911	9F
Q902	8H	D907	9E	D912	9F
D901	9C	D908	9E	D913	9H
D902	9D	D909	9G	D914	9H
D903	9D	D910	9G		

MEMO

NX-800H PC BOARD


TX-RX UNIT (X57-8900-18) (A/2): HK3 Foil side view (J79-0403-09 A/2)

Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC204	11F	Q7	10K	D9	11H
IC401	7M	Q8	10J	D10	11I
IC402	6N	Q9	10I	D11	11J
IC404	6P	Q10	10I	D12	11I
IC405	5N	Q101	7I	D14	11J
IC408	5M	Q102	7J	D101	9H
IC409	7N	Q203	8E	D103	5F
IC410	12J	Q204	9D	D104	6F
IC501	12P	Q205	10D	D106	6E
IC502	10Q	Q208	10G	D108	6D
IC503	12Q	Q210	7G	D109	5D
IC504	10N	Q401	3P	D110	4D
IC505	10P	Q402	4P	D201	10E
IC506	13P	Q404	4P	D202	10F
IC508	10O	Q407	5P	D205	9H
IC509	9P	Q409	7O	D212	7E
IC510	12O	Q410	7N	D213	7E
IC511	9O	Q412	6N	D216	7D
IC701	12M	Q413	5P	D401	3O
IC702	8N	Q415	7O	D403	4P
IC703	12L	Q416	5N	D406	3P
C705	12L	Q417	12I	D407	4N
IC706	8M	Q701	12K	D409	4N
IC707	12M	Q702	11L	D412	5N
IC708	8N	Q703	12M	D501	13O
IC709	8O	Q704	7P	D502	13O
IC710	11M	Q705	8P	D503	9O
IC711	11L	Q706	8R	D702	11L
IC712	9L	Q707	8R	D703	11L
IC713	11K	Q710	10L	D704	7O
IC714	11L	Q710	5Q	D705	8O
Q3	9I	D3	11I	D706	9L
Q4	9J	D4	11J	D707	9M
Q5	10I	D7	11H		
Q6	10J	D8	11J		

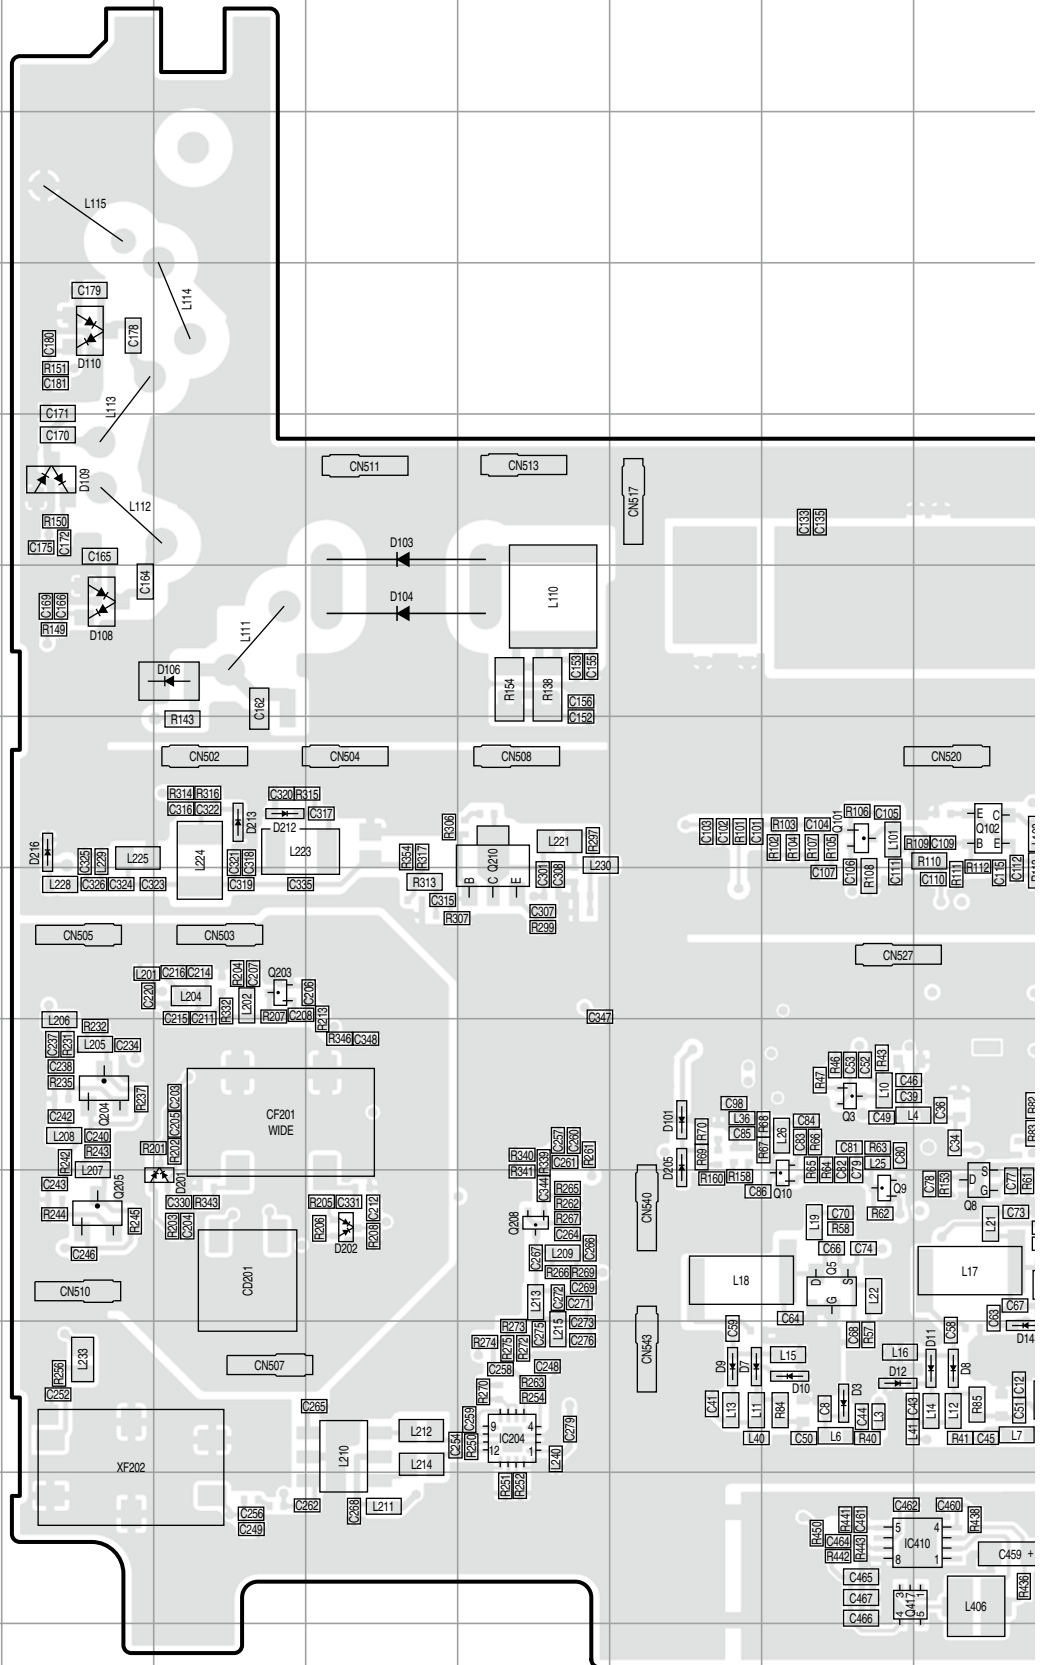

PC BOARD NX-800H



TX-RX UNIT (X57-8900-18) (A/2): HK3
Foil side view (J79-0403-09 A/2)

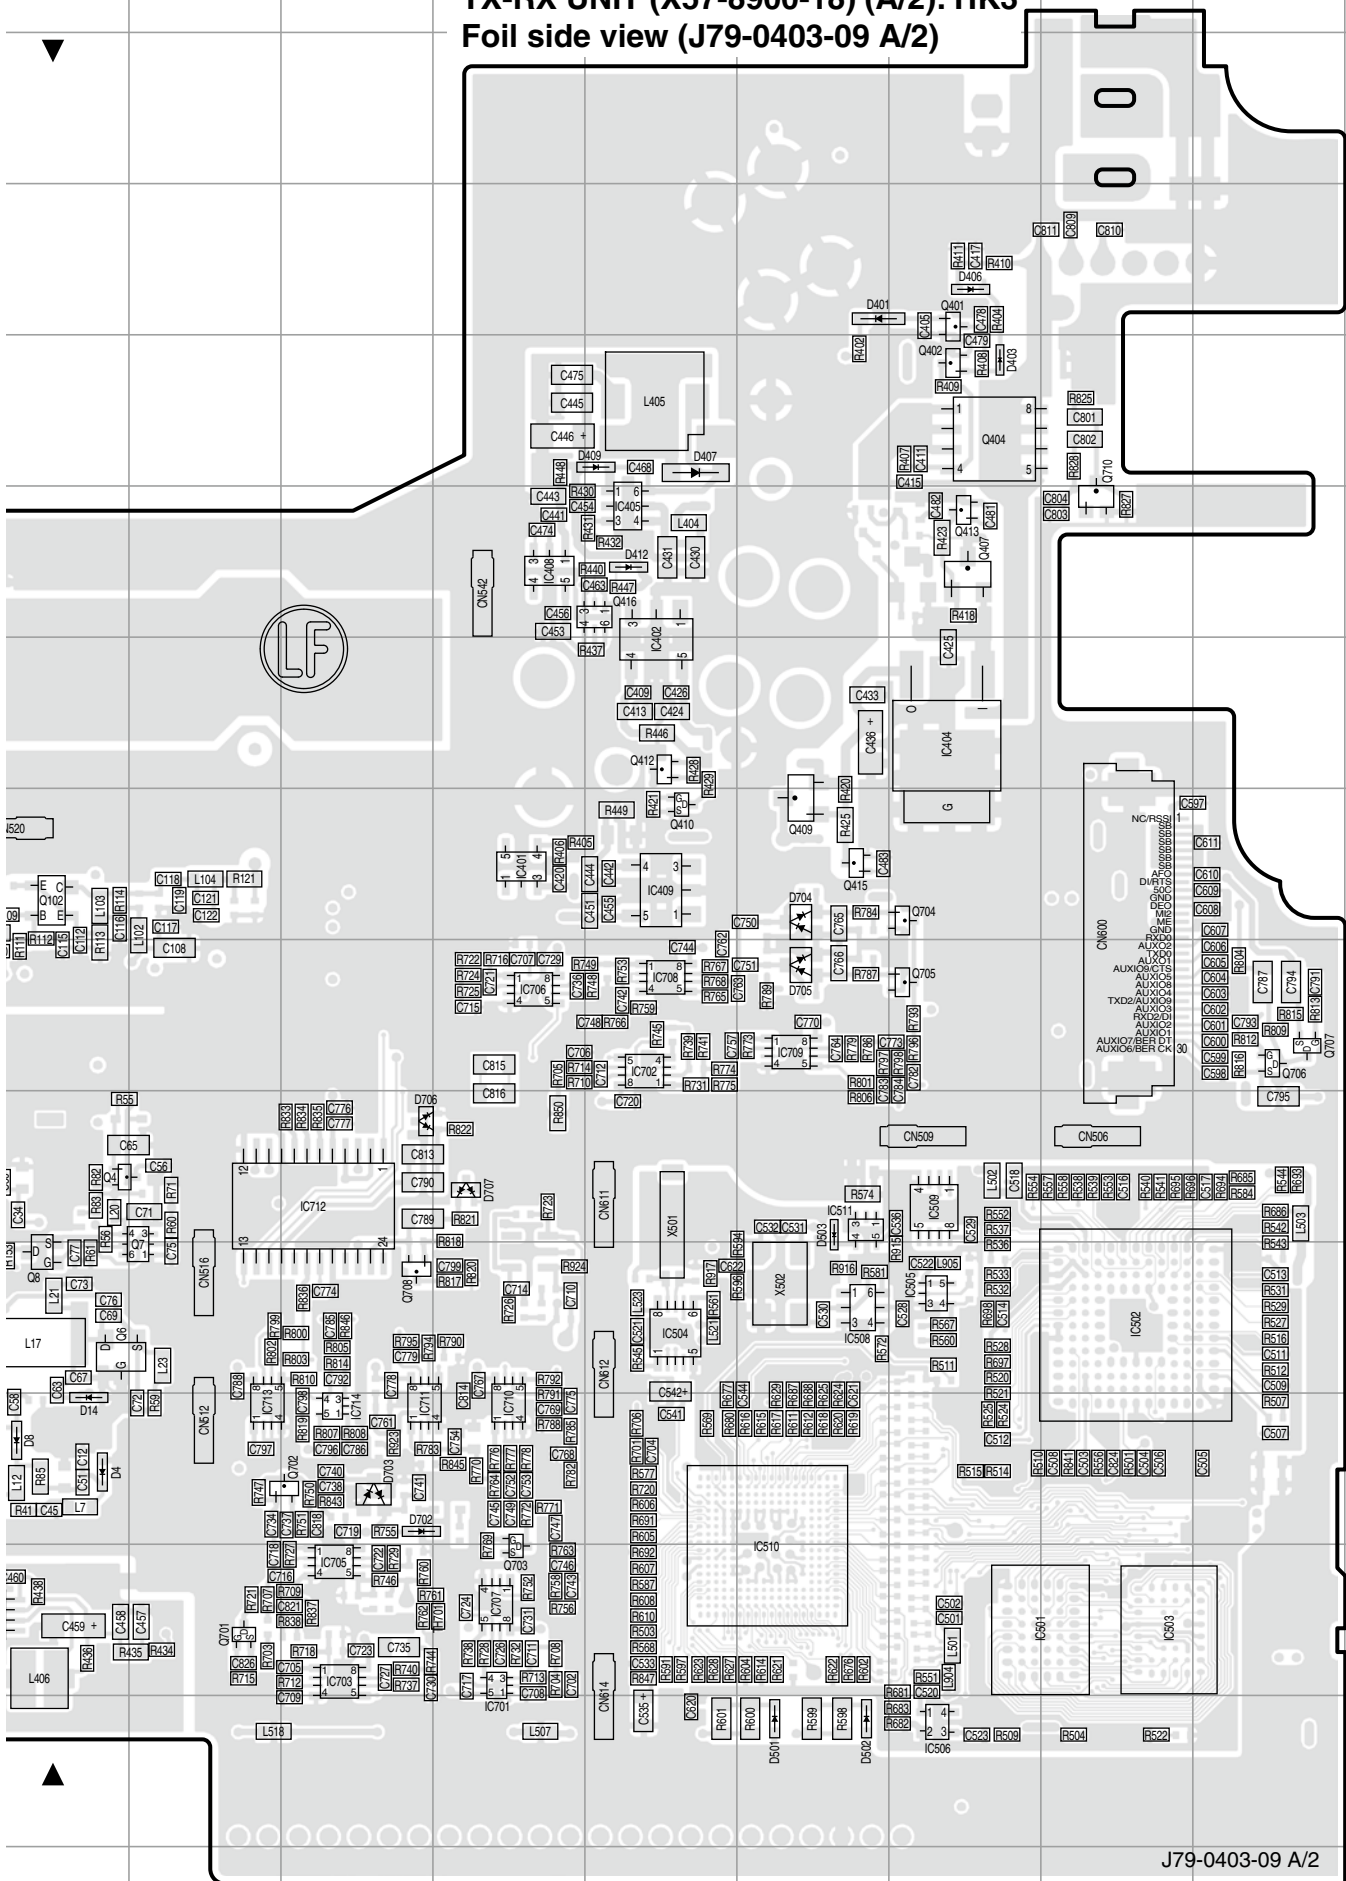

J79-0403-09 A/2



NX-800H PC BOARD

TX-RX UNIT (X57-8900-18) (B/2): HK3
Component side view (J79-0403-09 B/2)

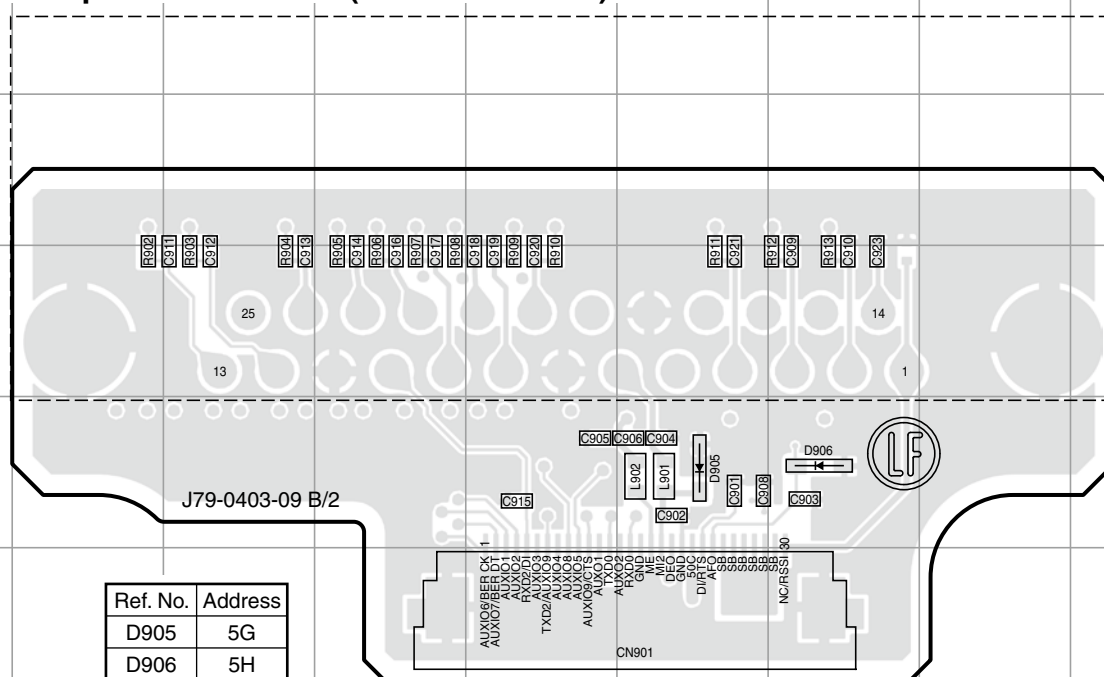

Ref. No.	Address
D905	5G
D906	5H

TX-RX UNIT (X57-8900-18) (B/2): HK3
Foil side view (J79-0403-09 B/2)

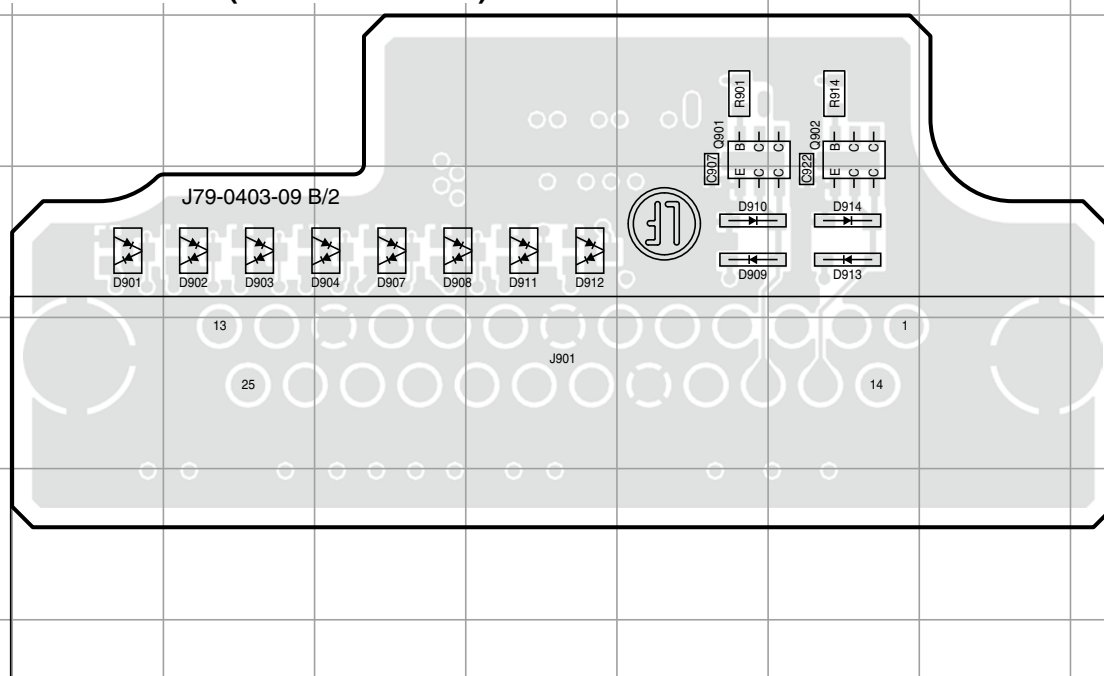


Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
Q901	8G	D904	9E	D911	9F
Q902	8H	D907	9E	D912	9F
D901	9C	D908	9E	D913	9H
D902	9D	D909	9G	D914	9H
D903	9D	D910	9G		

MEMO

NX-800/800H


BLOCK DIAGRAM

NX-800/800H (K,K2): TX-RX UNIT (X57-8900-XX, XC1-0990-10) (A/2)

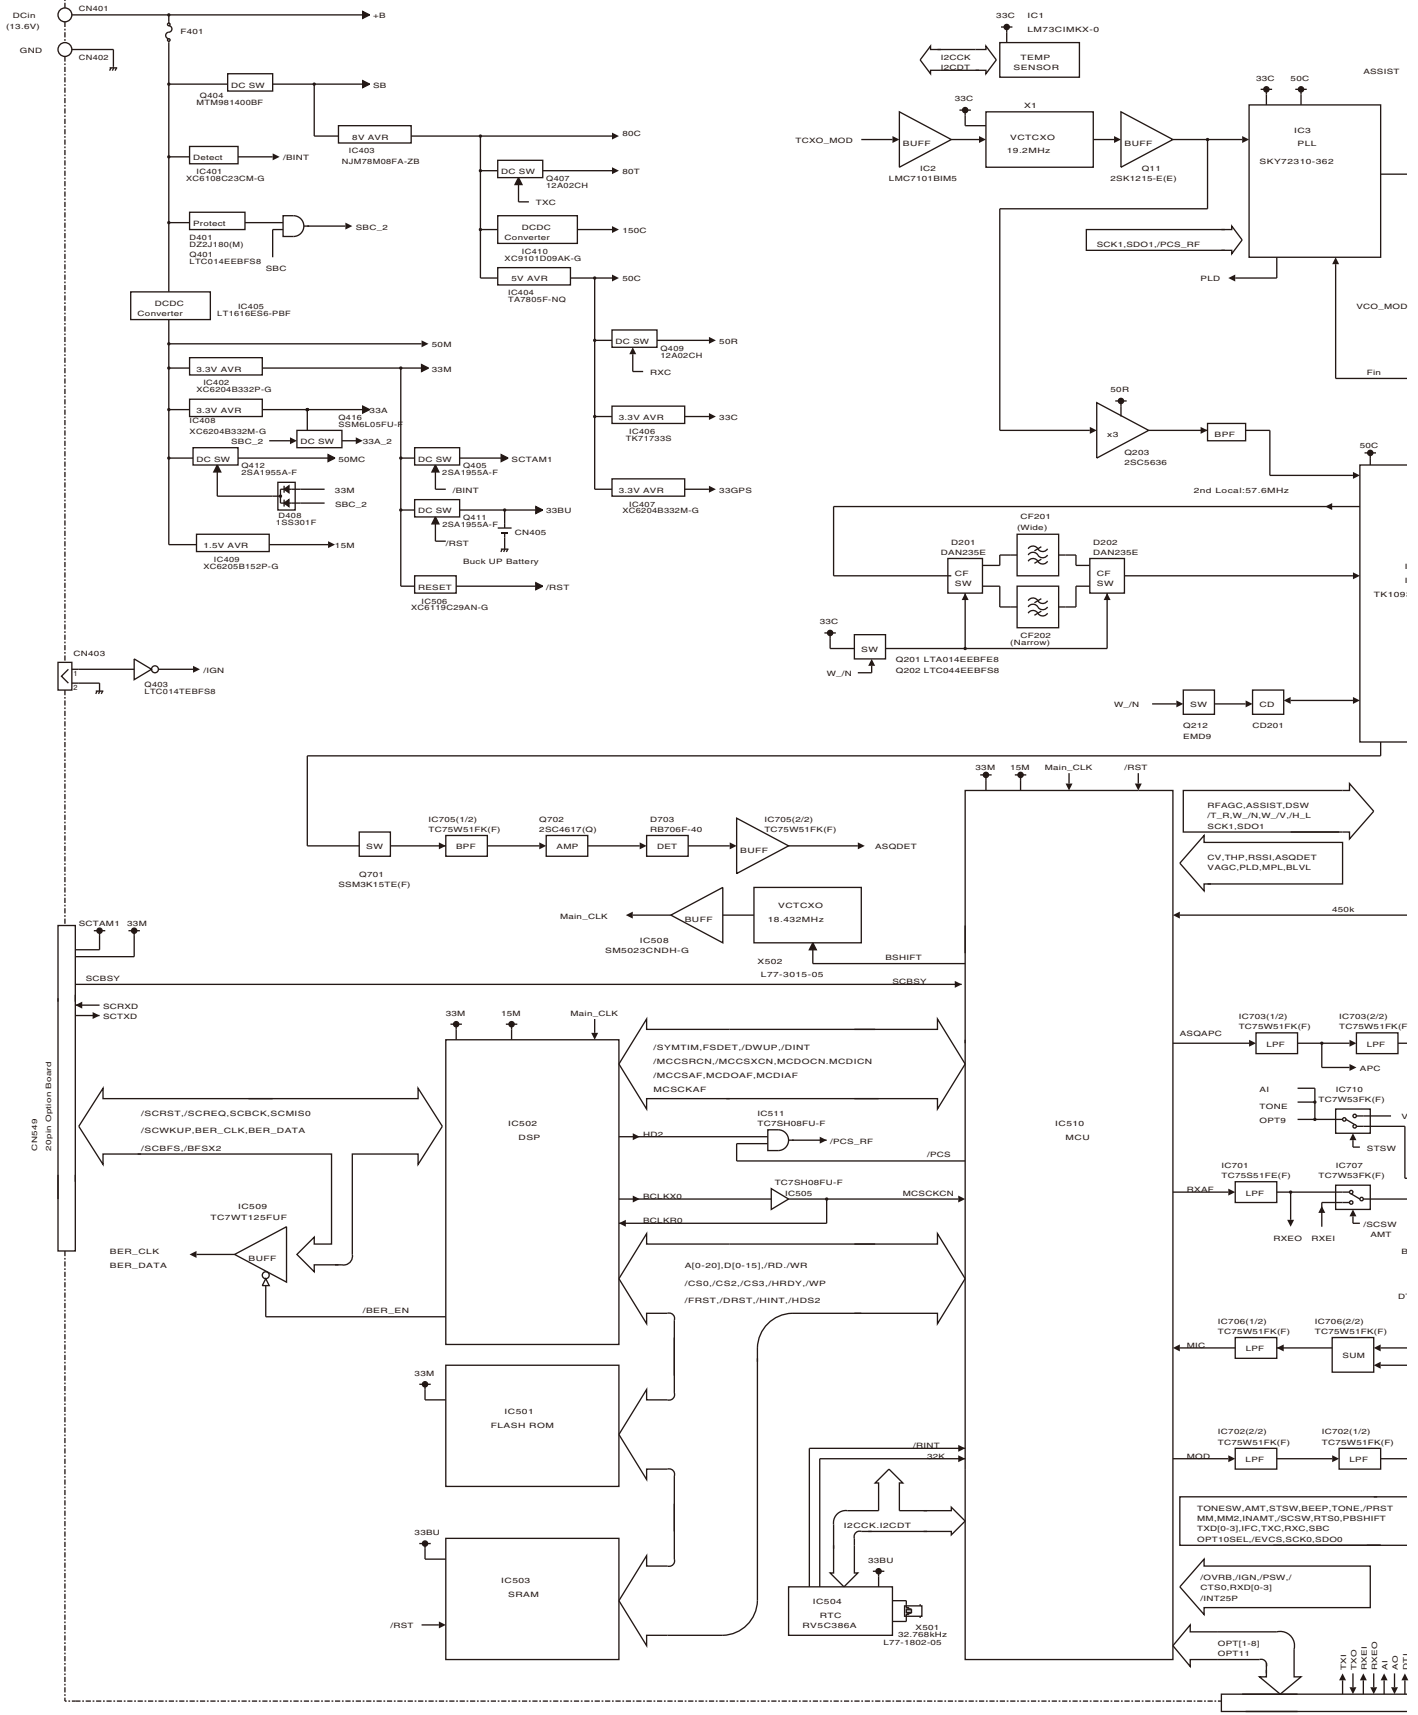

NX-800/800H


BLOCK DIAGRAM

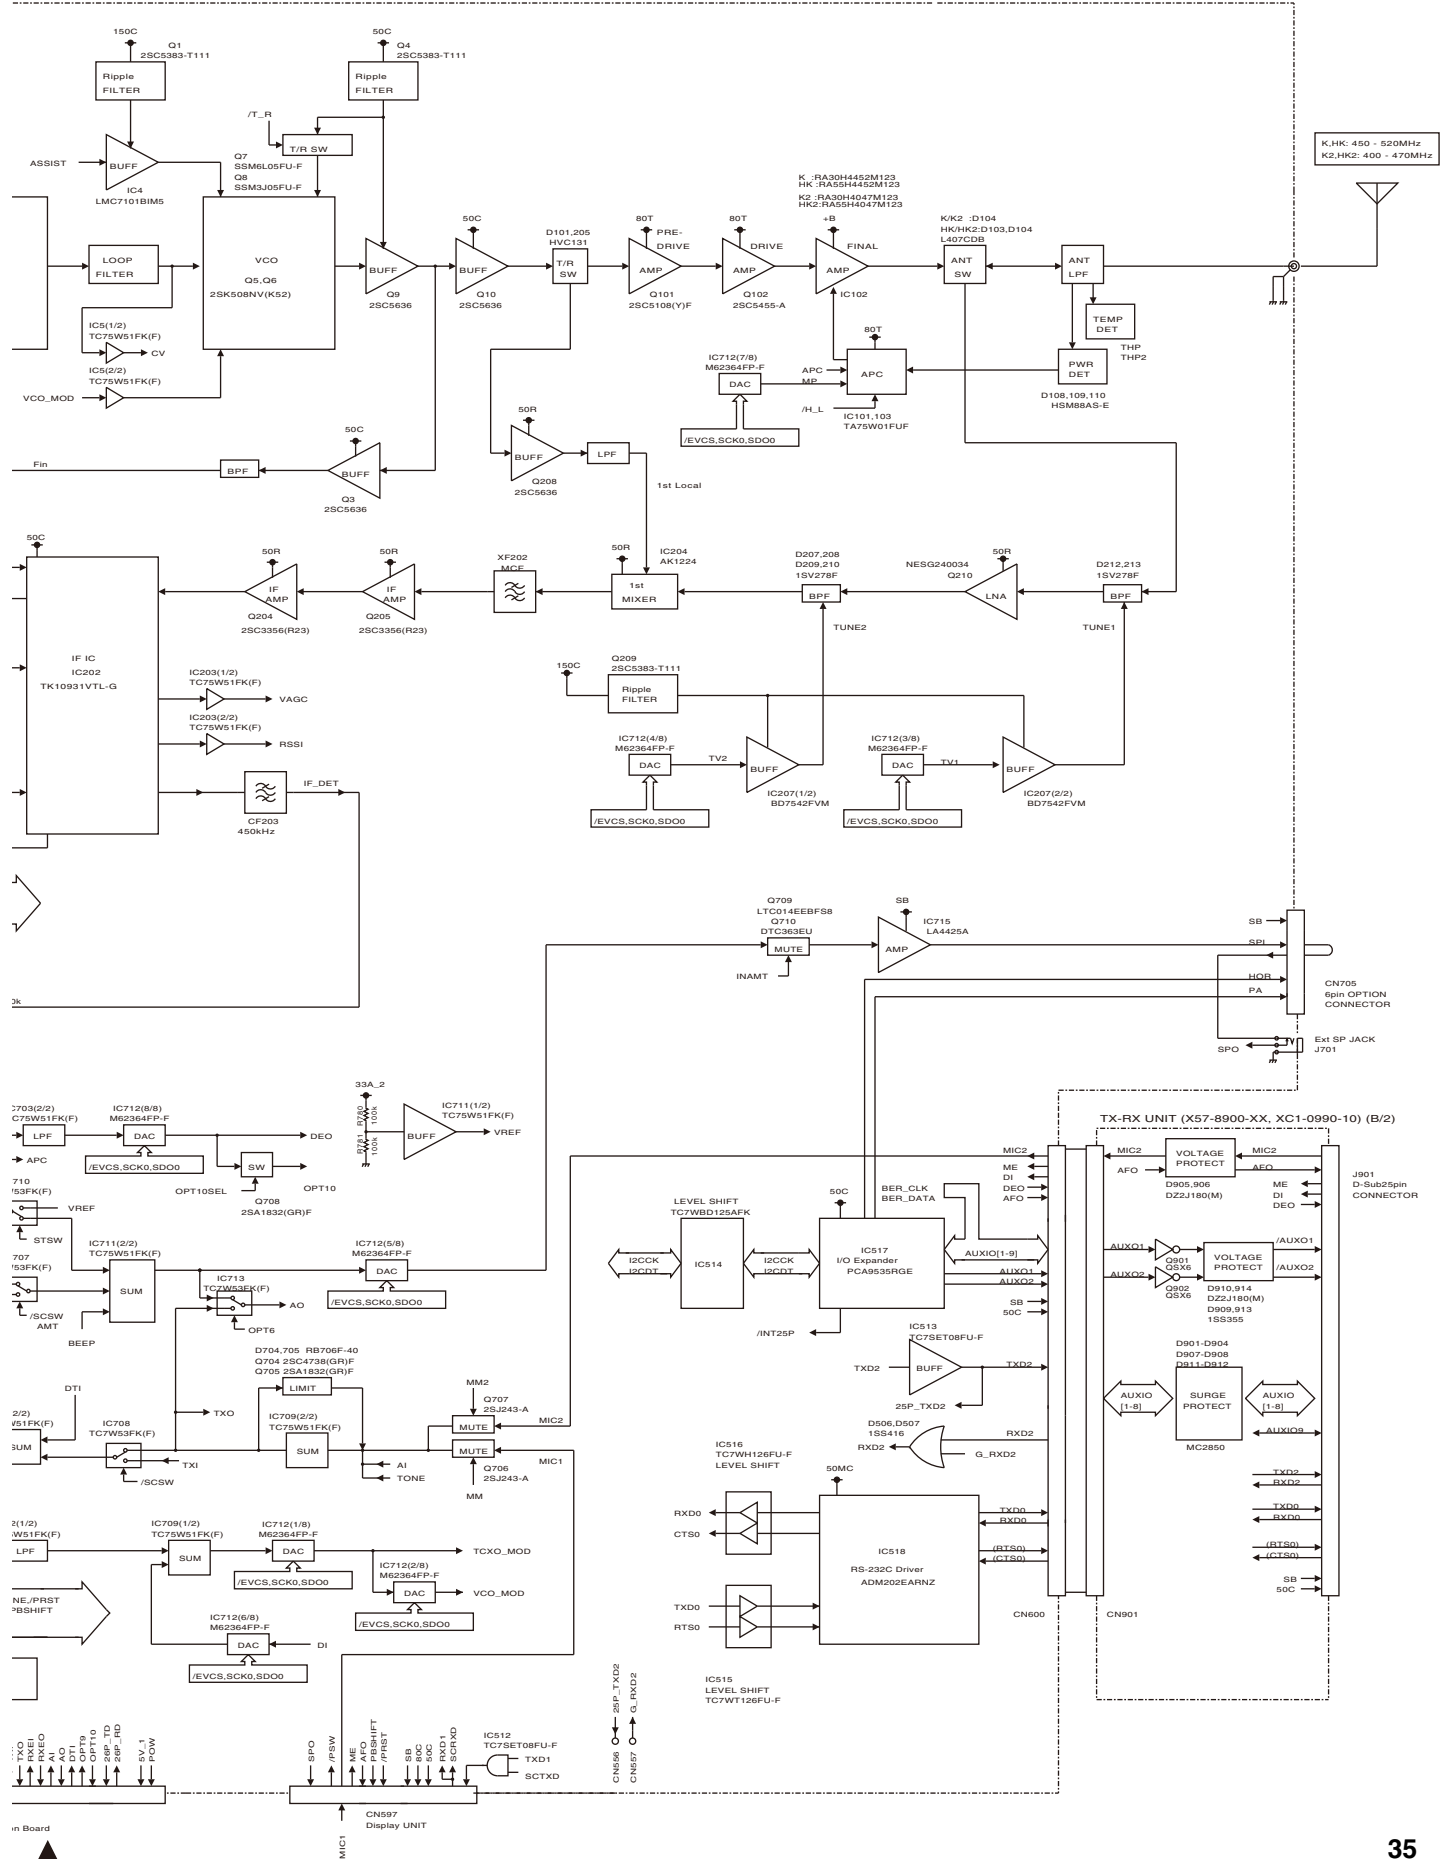


NX-800/800H

BLOCK DIAGRAM

NX-800H (K3): TX-RX UNIT (X57-8900-18) (A/2)

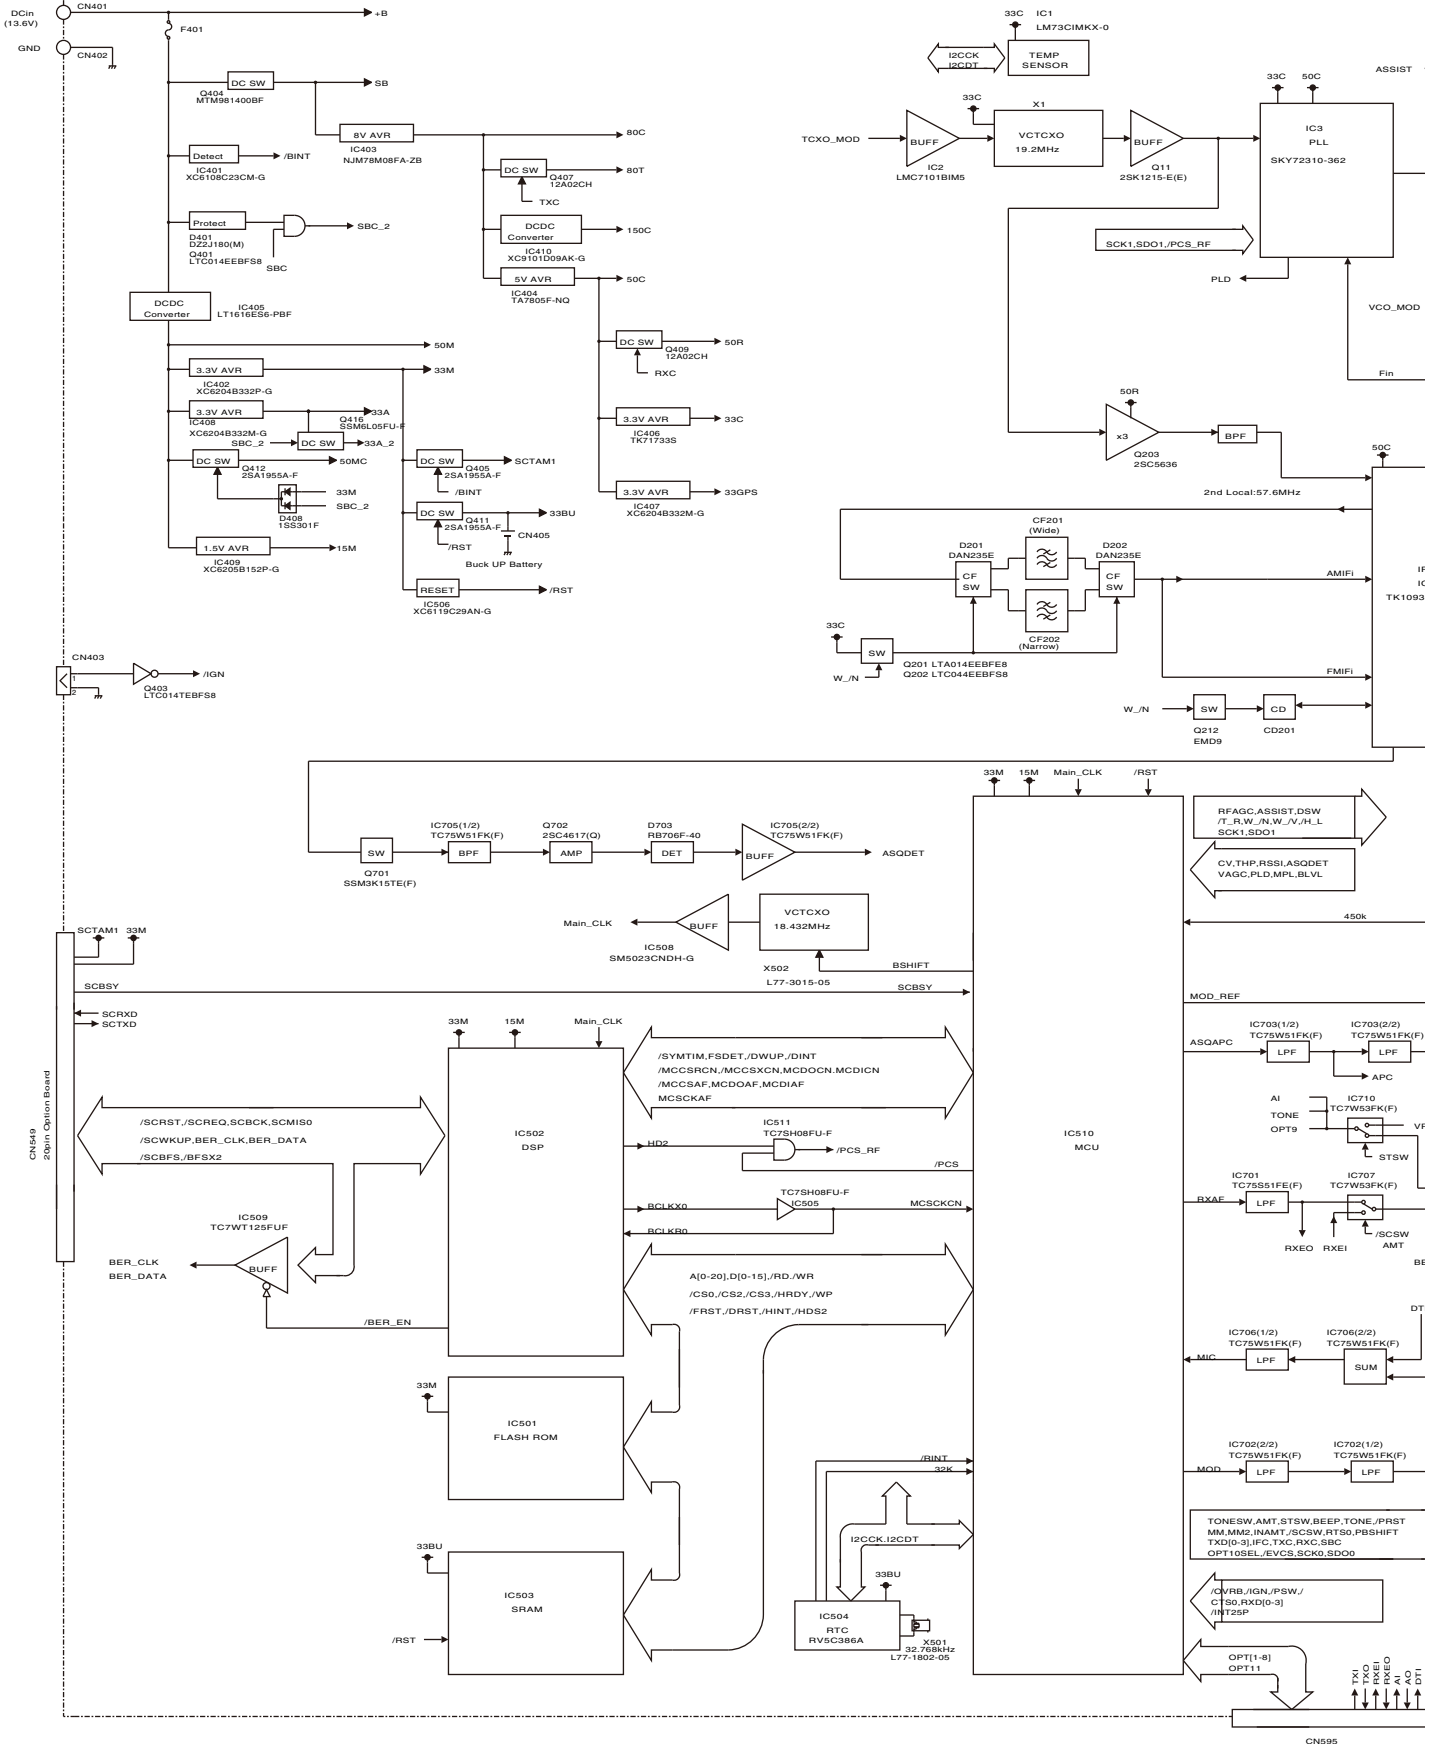


BLOCK DIAGRAM

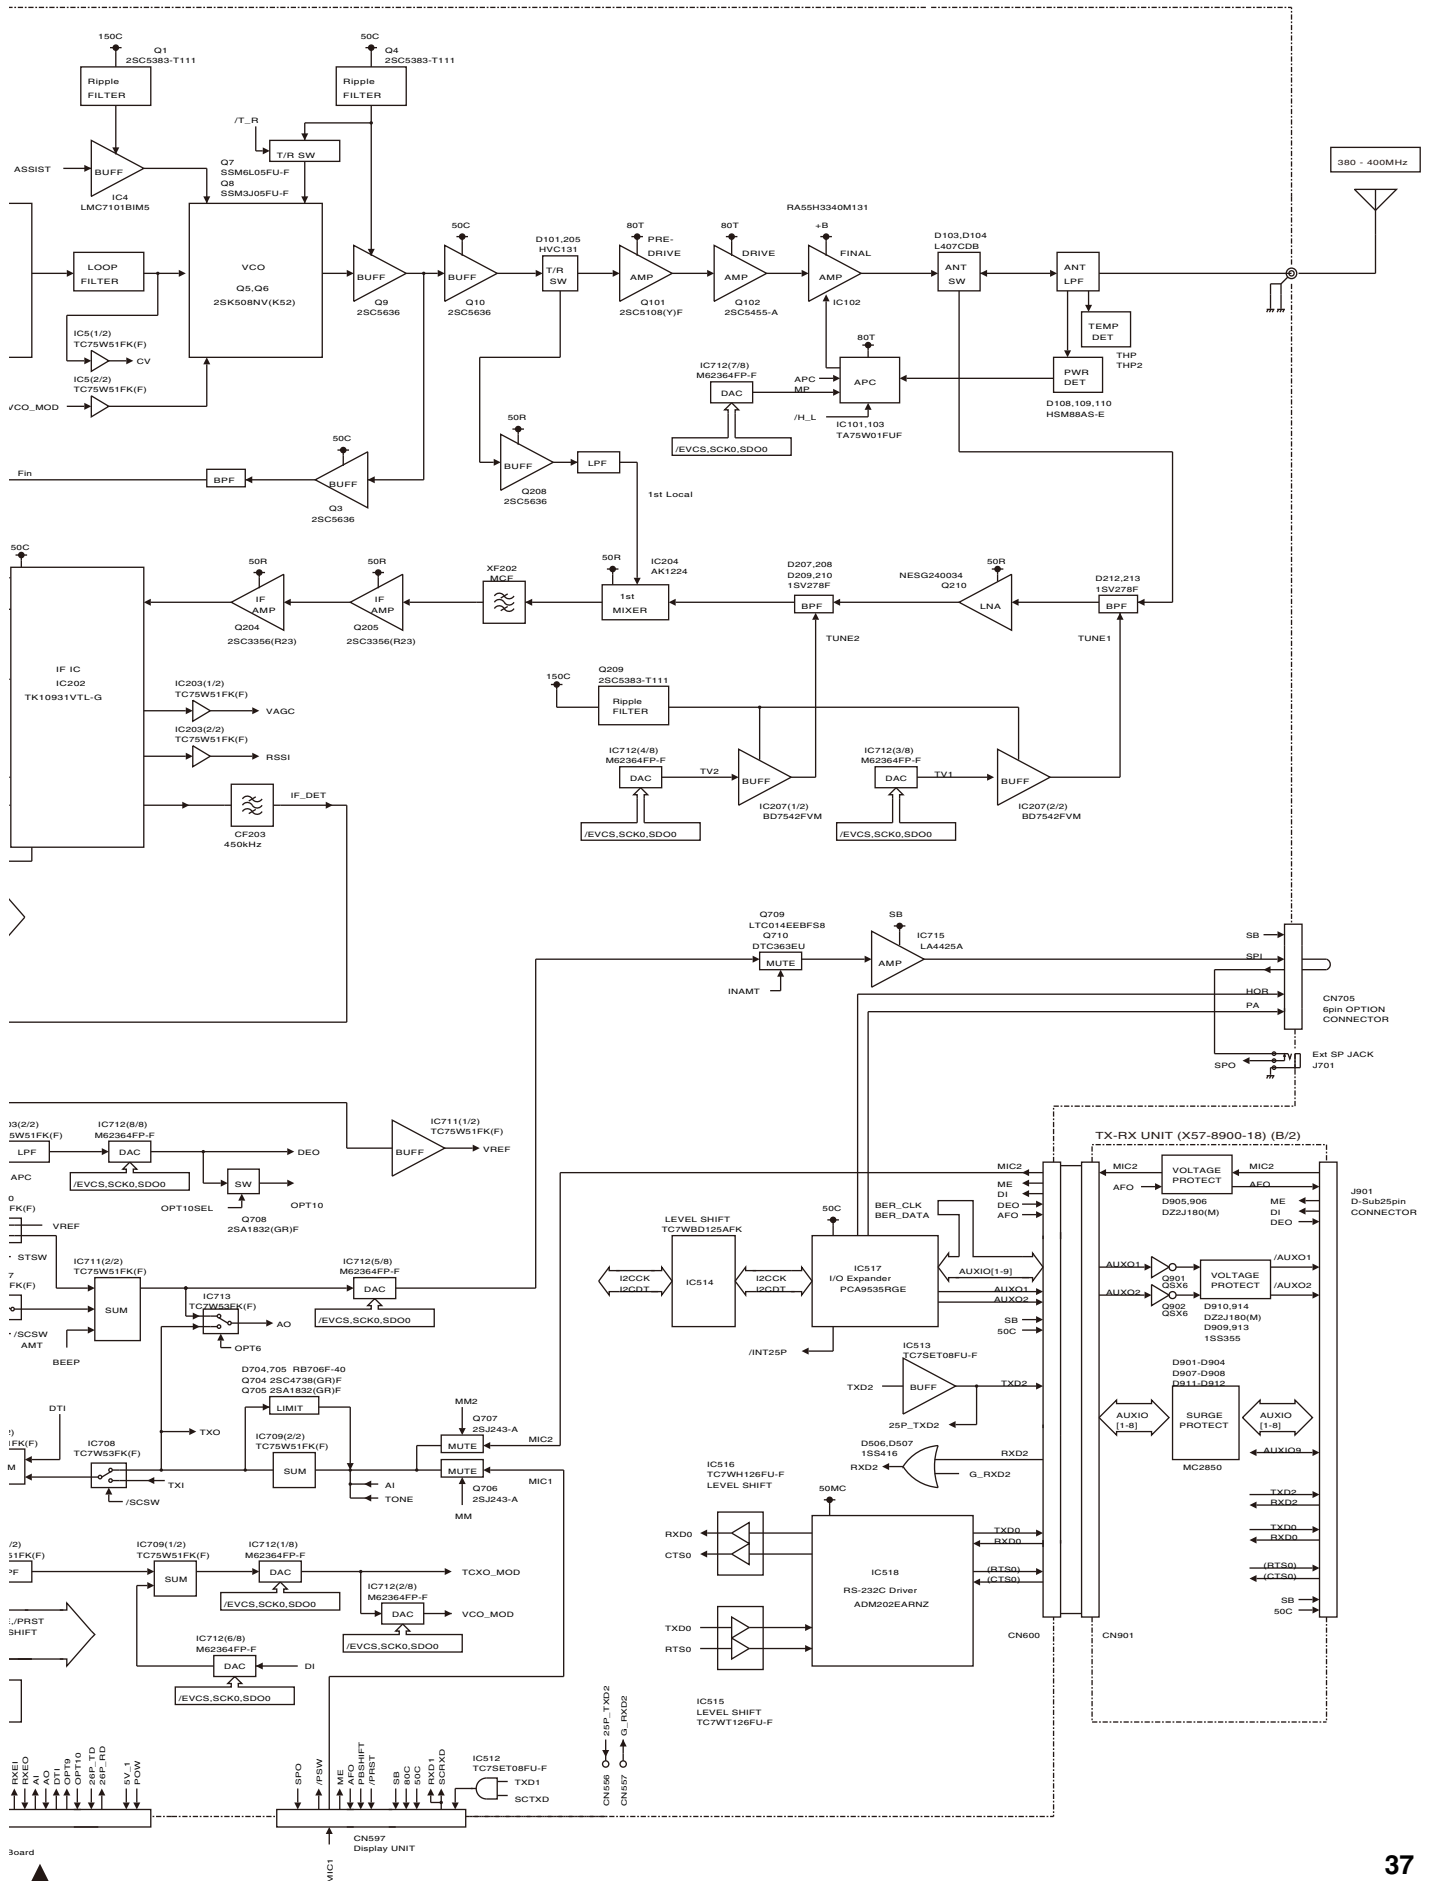




KENWOOD

JVCKENWOOD Corporation
Communications Systems Business Unit

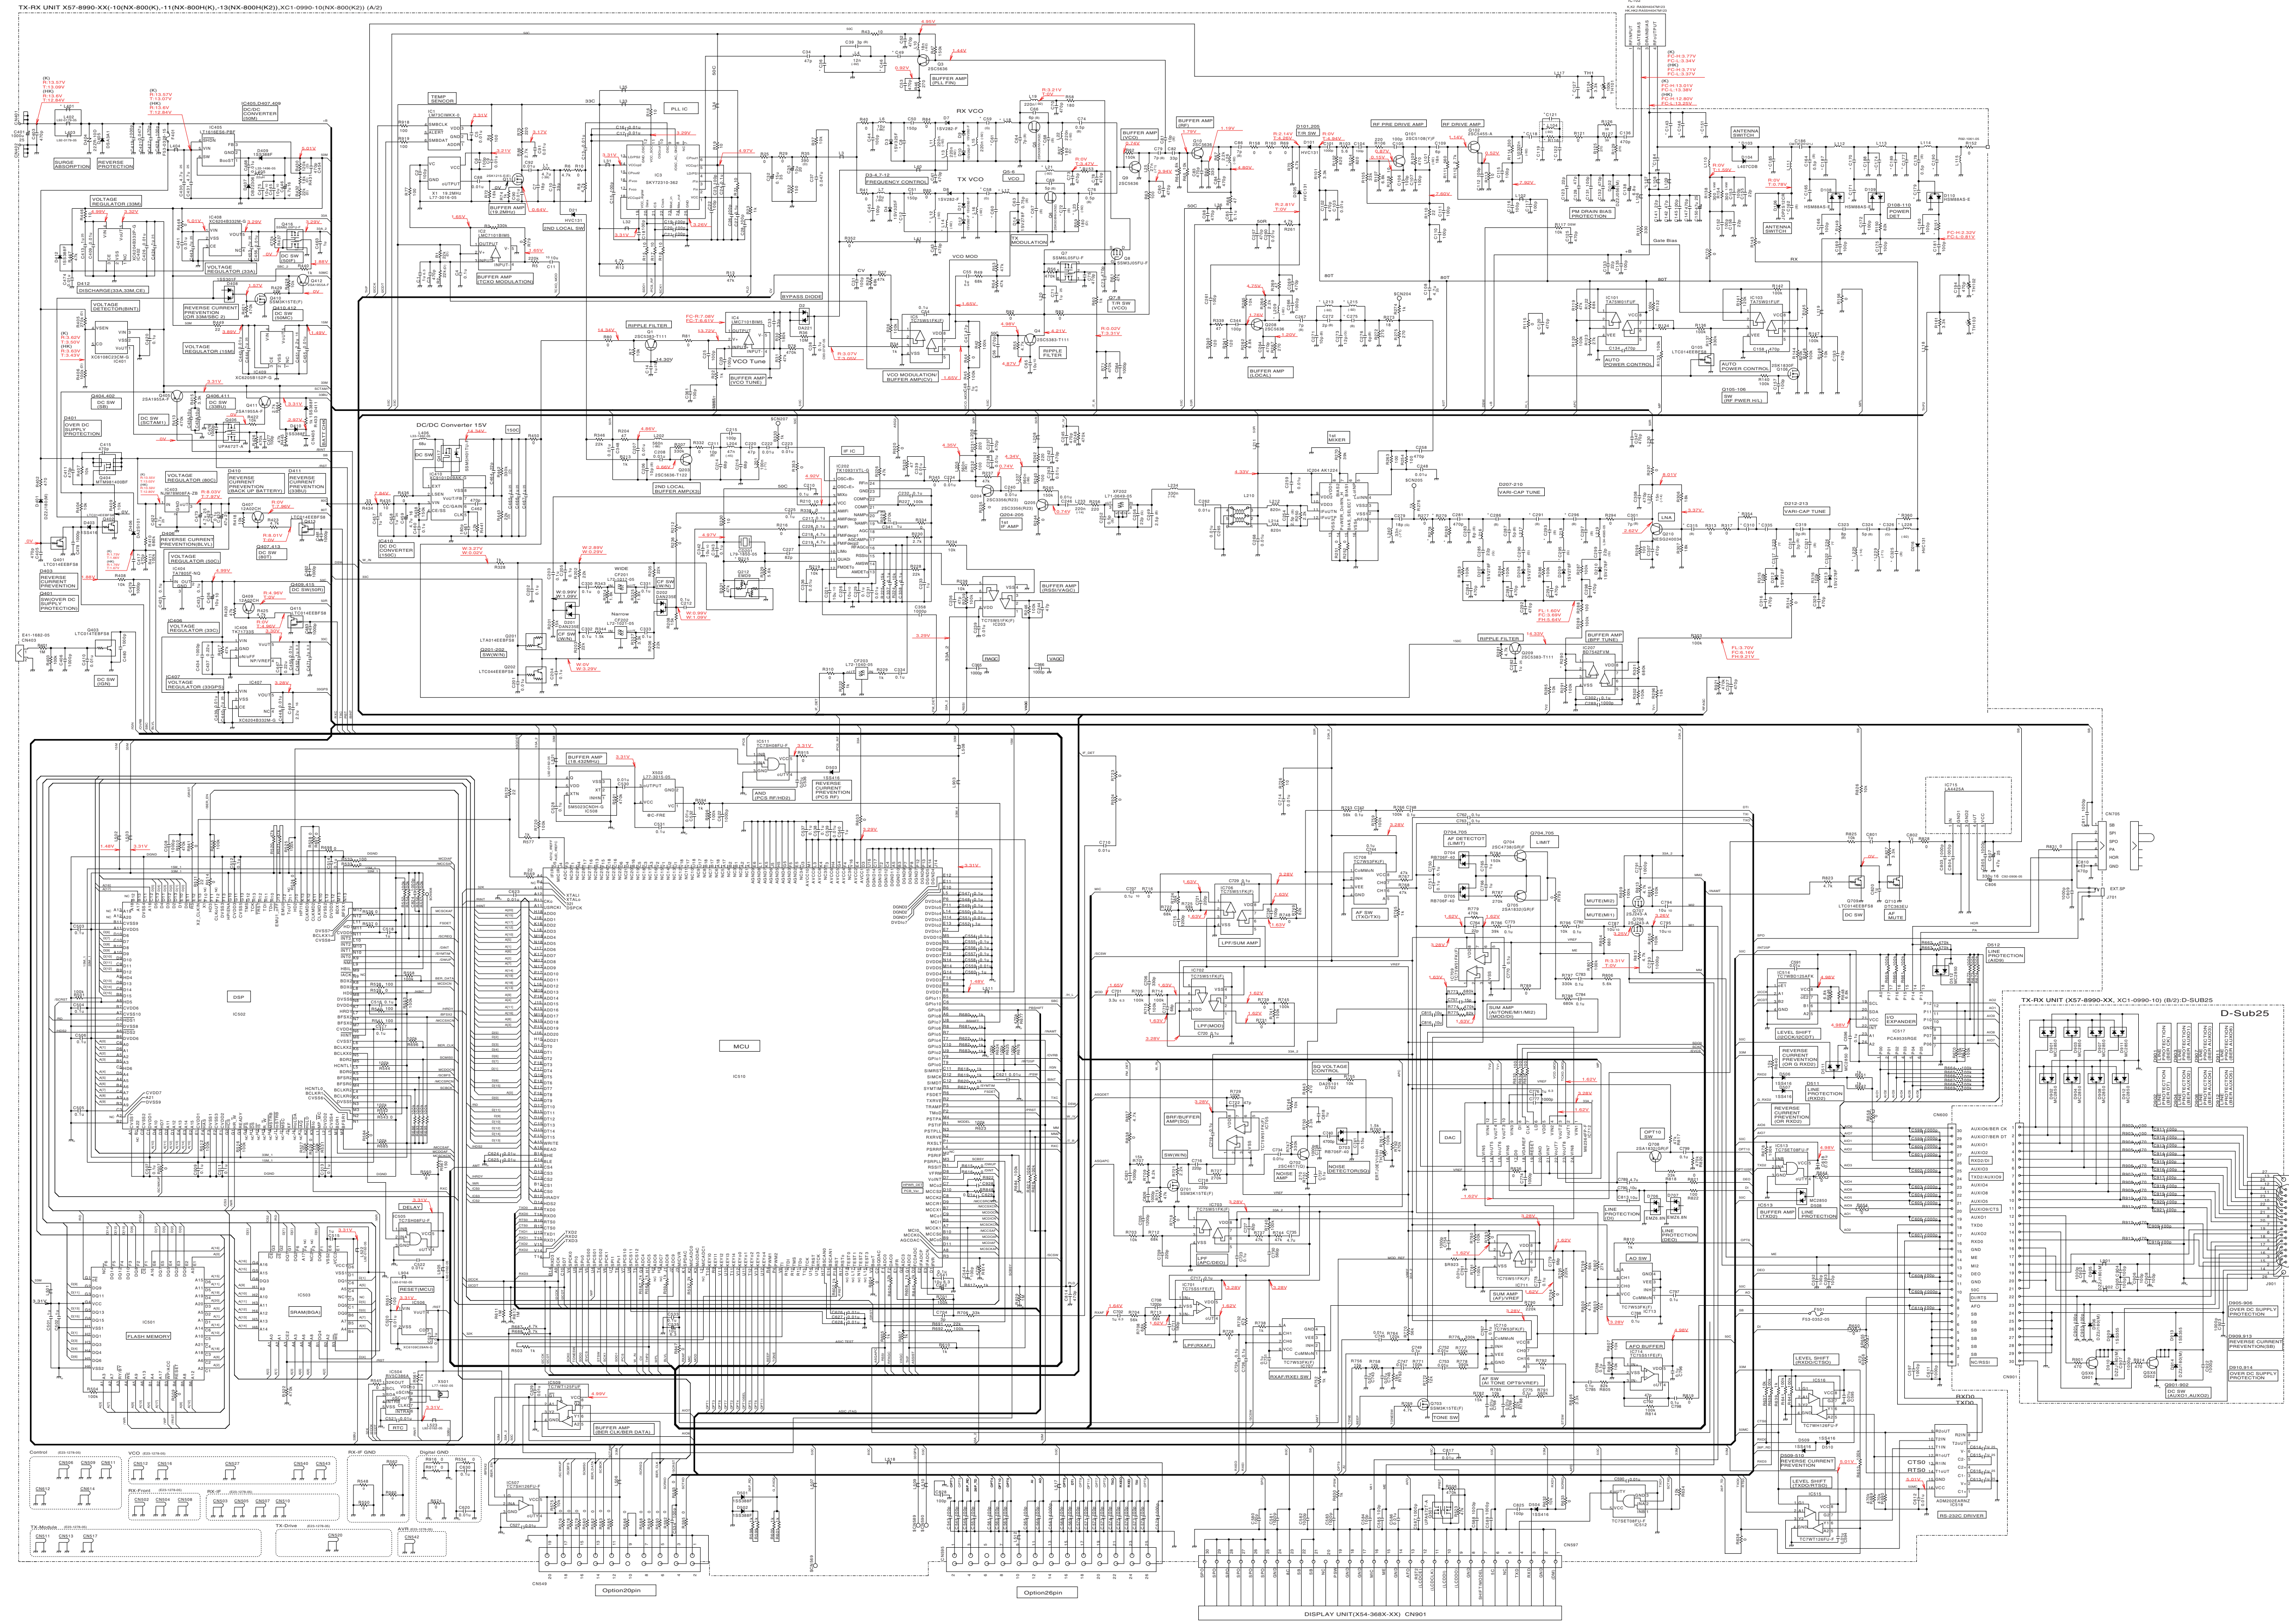

TX-RX UNIT (X57-8900-18) (A2)

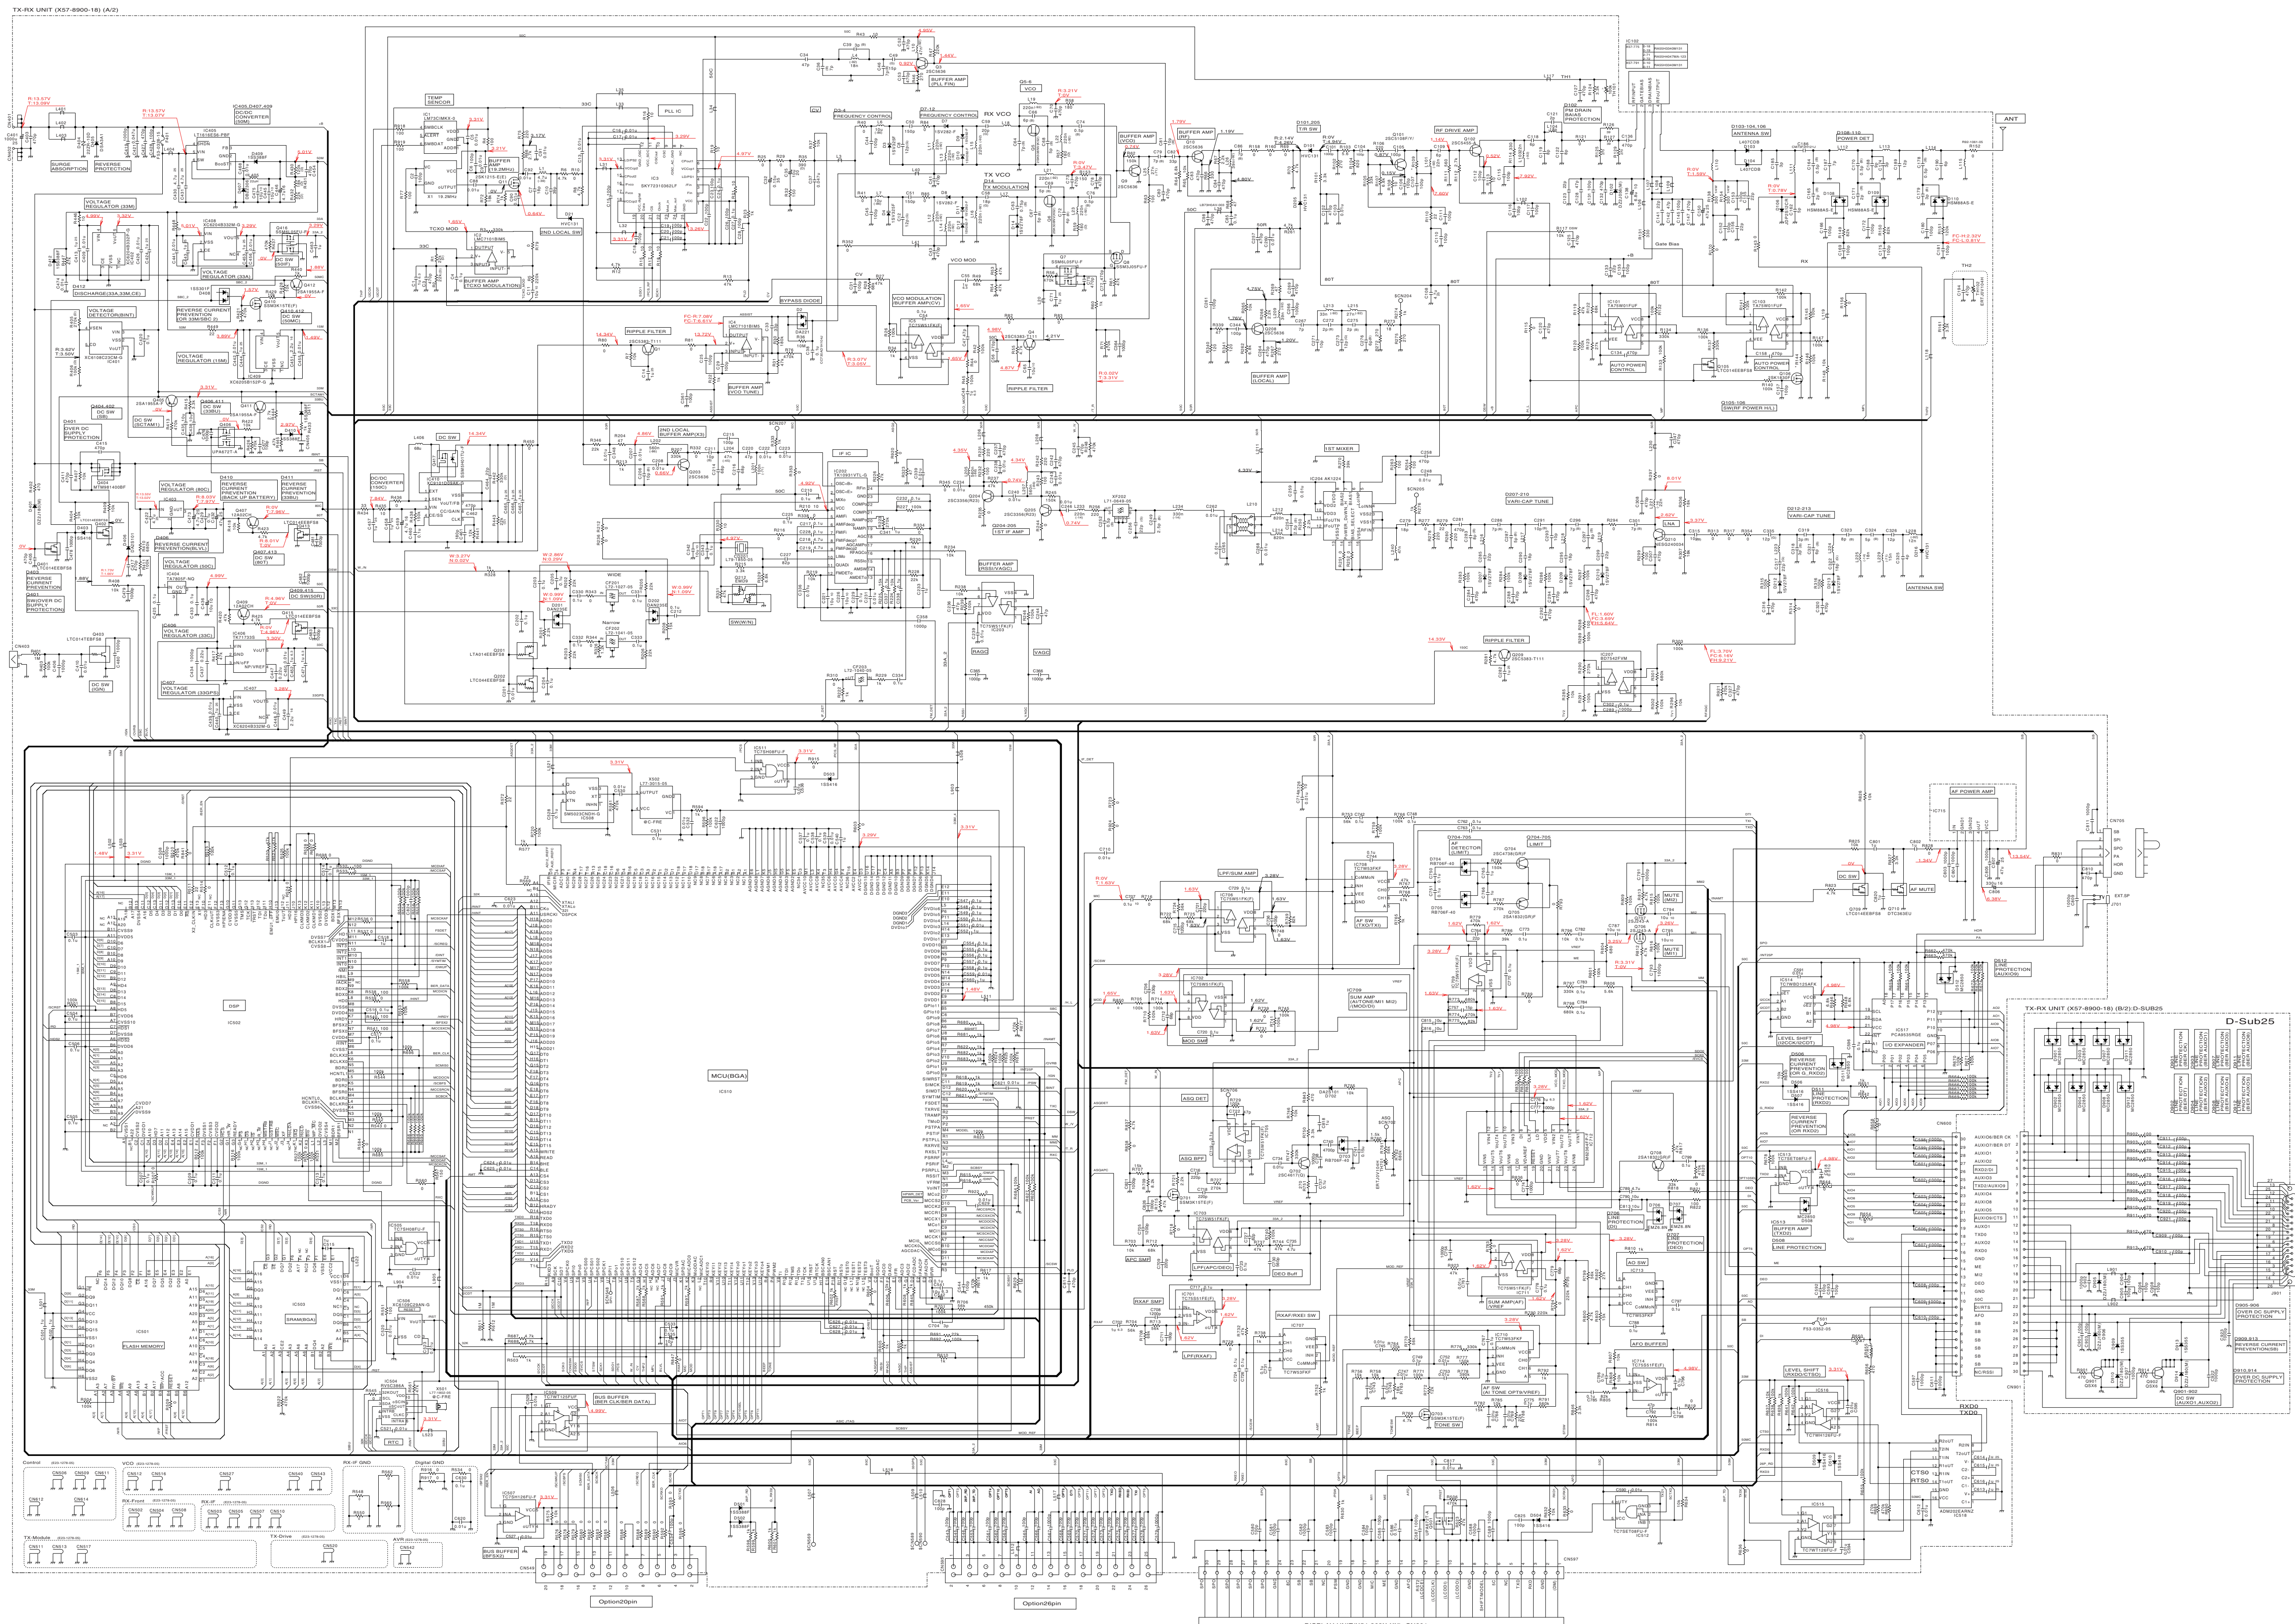


NX-800/800H PC BOARD


PC BOARD NX-800/800H

TX-RX UNIT (X57-8900-XX) (A/2) -10: K, -11: HK, -13: HK2
TX-RX UNIT (XC1-0990-10) (A/2) : K2
Component side view (J79-0239-29 A/2)

TX-RX UNIT (X57-8900-XX) (A/2) -10: K, -11: HK, -13: HK2
TX-RX UNIT (XC1-0990-10) (A/2) : K2
Component side view (J79-0239-29 A/2)

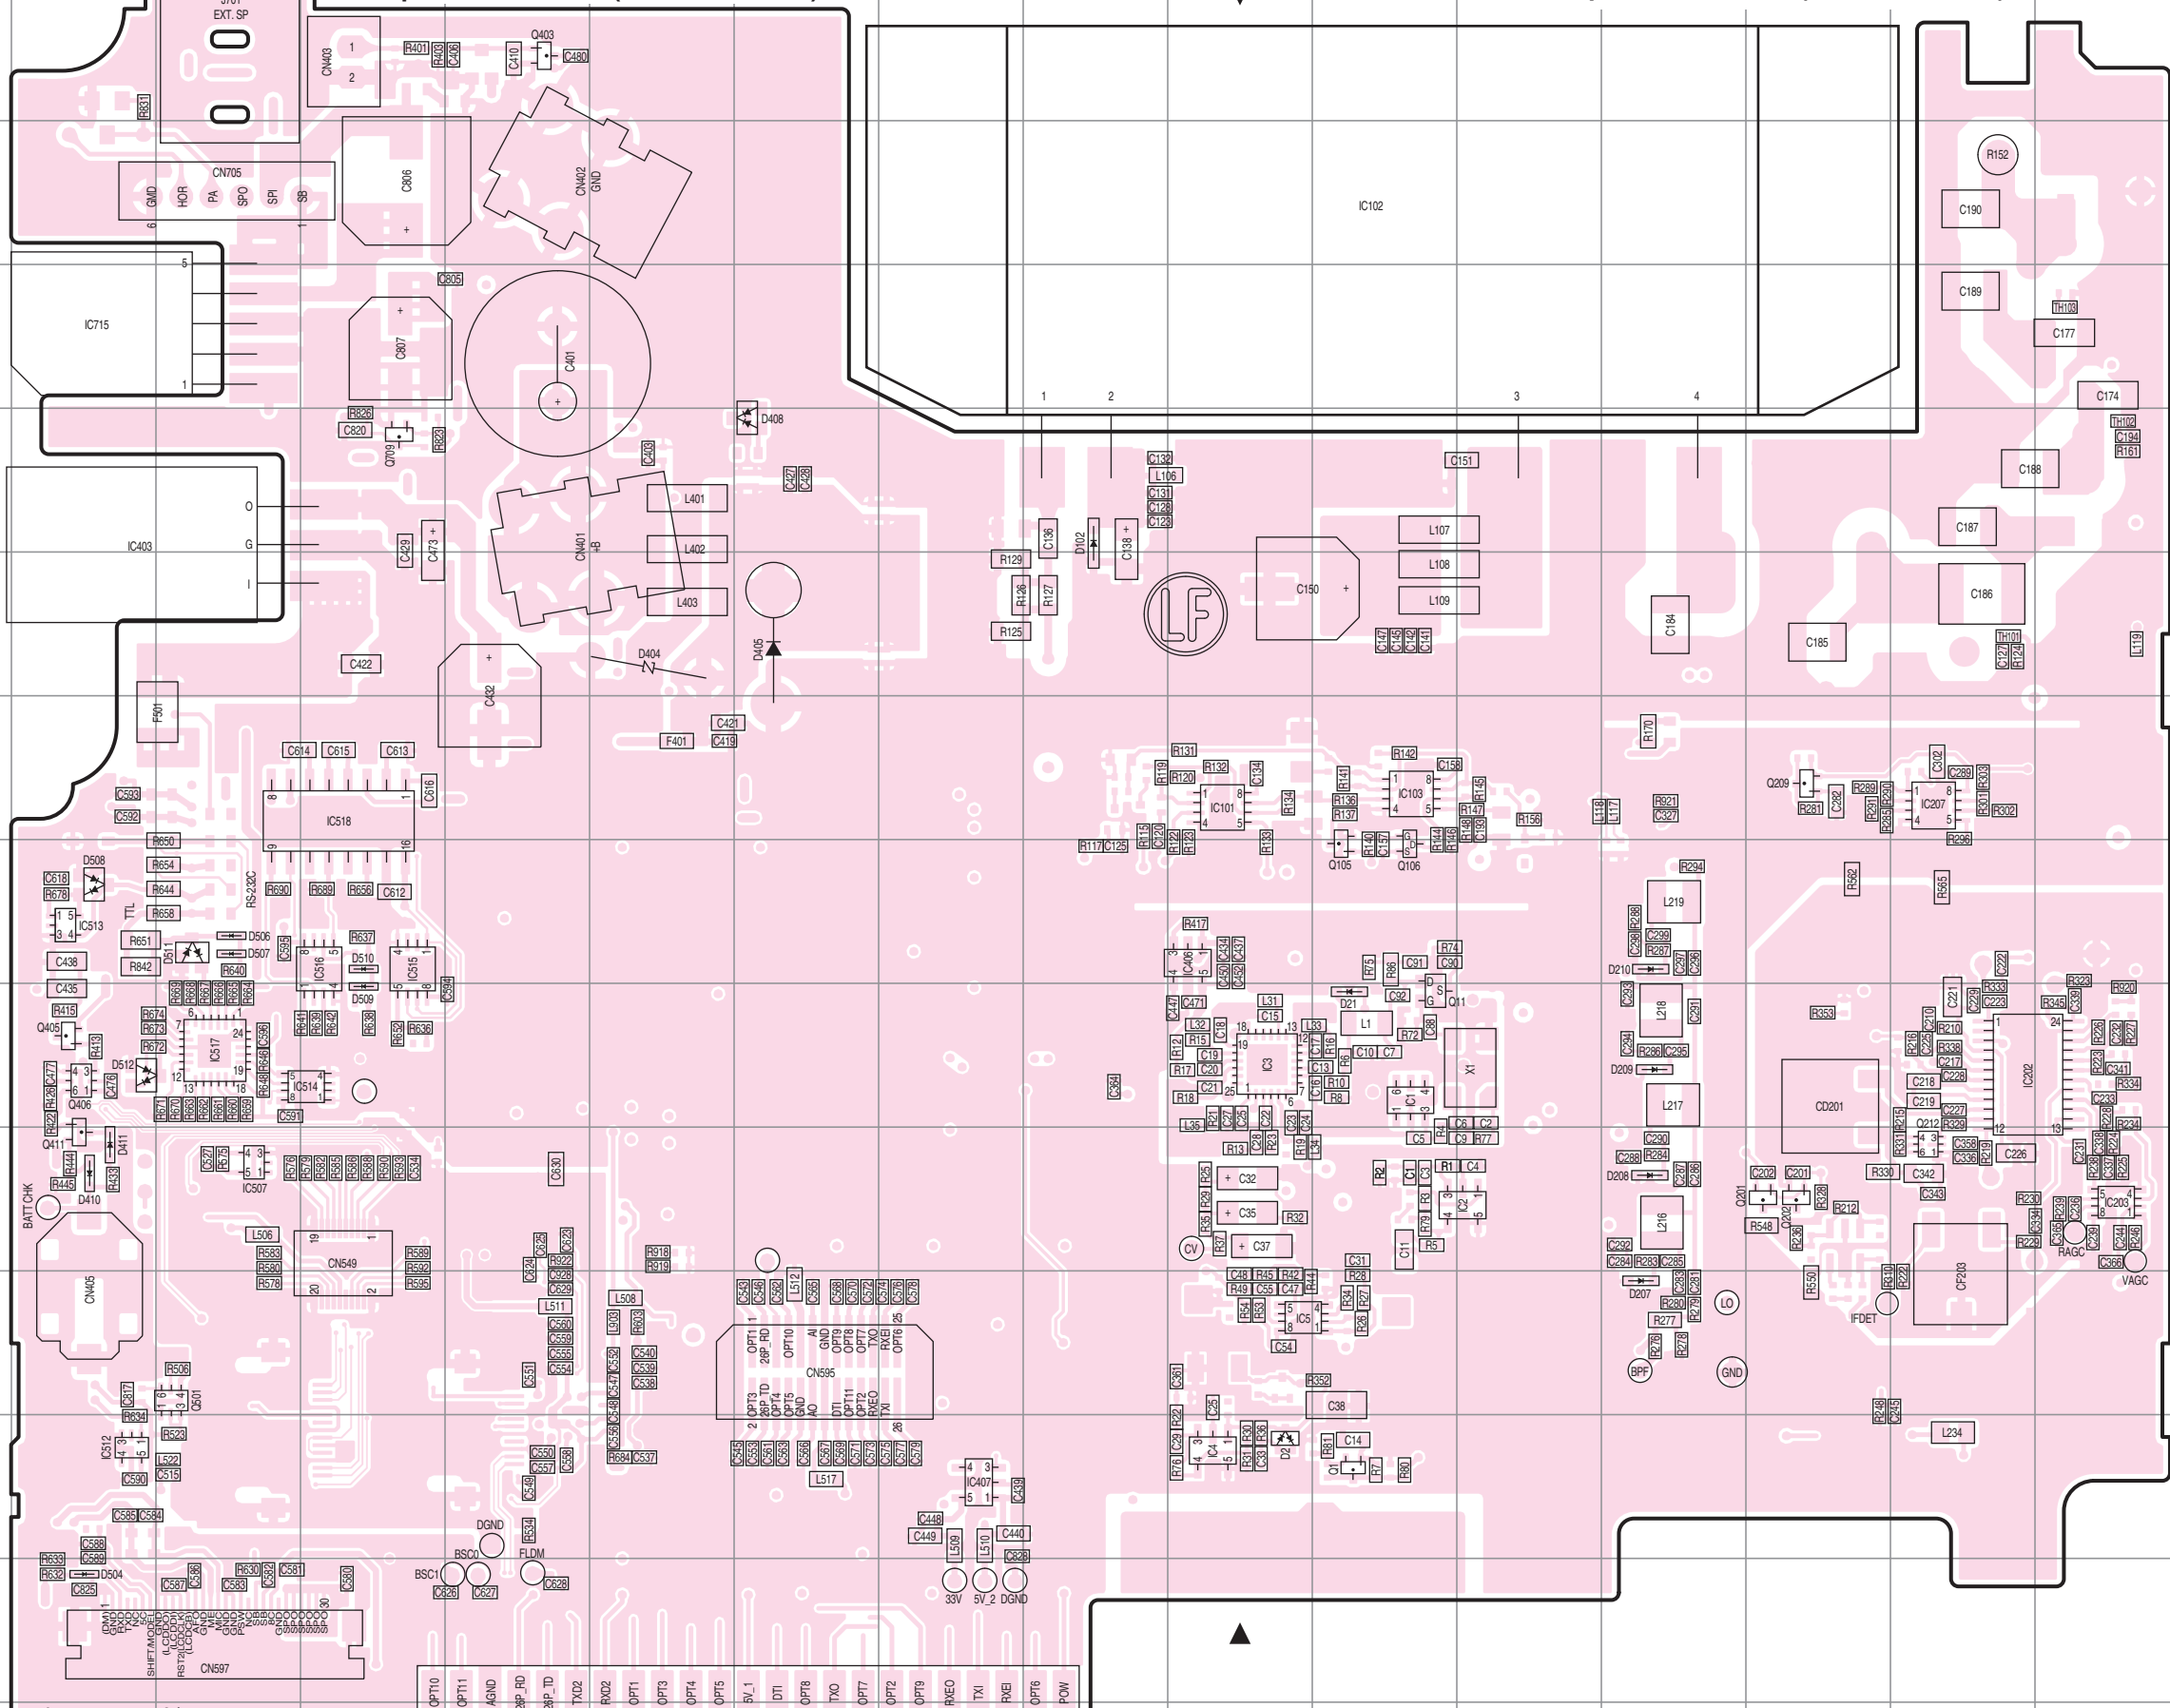

Ref. No.	Address	Ref. No.	Address
IC1	9K	Q209	7N
IC2	10L	Q212	10O
IC3	9J	Q403	2E
IC4	12J	Q405	9B
IC5	11J	Q406	9B
IC101	7J	Q411	10B
IC102	3K	Q501	11C
IC103	7K	Q709	5D
IC202	9O	D2	12J
IC203	10P	D21	9K
IC207	7O	D102	5I
IC403	5B	D207	11M
IC406	8J	D208	10M
IC407	12H	D209	9M
IC507	10C	D210	8M
IC512	12B	D404	6F
IC513	8B	D405	6G
IC514	9D	D408	5G
IC515	8D	D410	10B
IC516	8D	D411	10B
IC517	9C	D504	13B
IC518	7D	D506	8C
IC715	4B	D507	8C
Q1	12K	D508	8B
Q11	9K	D509	9D
Q105	8K	D510	8D
Q106	8K	D511	8C
Q201	10N	D512	9B
Q202	10N		



J79-0239-29 A/2

OPT10 OPT11 AGND 2&P_RD 2&P_TD TX02 RX02 OPT1 OPT3 OPT4 OPT5 5V_1 DTI OPT8 TX0 OPT7 OPT2 OPT8 RXEO TX1 RXE1 OPT6 POW



NX-800/800H PC BOARD

PC BOARD NX-800/800H

TX-RX UNIT (X57-8900-XX) (A/2) -10: K, -11: HK, -13: HK2
 TX-RX UNIT (XC1-0990-10) (A/2) : K2
 Foil side view (J79-0239-29 A/2)

TX-RX UNIT (X57-8900-XX) (A/2) -10: K, -11: HK, -13: HK2
 TX-RX UNIT (XC1-0990-10) (A/2) : K2
 Foil side view (J79-0239-29 A/2)

Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC204	11F	Q7	10K	D9	11H
IC401	7M	Q8	10J	D10	11I
IC402	6N	Q9	10I	D11	11J
IC404	6P	Q10	10I	D12	11I
IC405	5N	Q101	7I	D14	11J
IC408	5M	Q102	7J	D101	9H
IC409	7N	Q203	8E	D103	5F
IC410	12J	Q204	9D	D104	6F
IC501	12P	Q205	10D	D106	6E
IC502	10Q	Q208	10G	D108	6D
IC503	12Q	Q210	7G	D109	5D
IC504	10N	Q401	3P	D110	4D
IC505	10P	Q402	4P	D201	10E
IC506	13P	Q404	4P	D202	10F
IC508	10O	Q407	5P	D205	9H
IC509	9P	Q409	7O	D212	7E
IC510	12O	Q410	7N	D213	7E
IC511	9O	Q412	6N	D216	7D
IC701	12M	Q413	5P	D401	3O
IC702	8N	Q415	7O	D403	4P
IC703	12L	Q416	5N	D406	3P
IC705	12L	Q417	12I	D407	4N
IC706	8M	Q701	12K	D409	4N
IC707	12M	Q702	11L	D412	5N
IC708	8N	Q703	12M	D501	13O
IC709	8O	Q704	7P	D502	13O
IC710	11M	Q705	8P	D503	9O
IC711	11L	Q706	8R	D702	11L
IC712	9L	Q707	8R	D703	11L
IC713	11K	Q708	10L	D704	7O
IC714	11L	Q710	5Q	D705	8O
Q3	9I	D3	11I	D706	9L
Q4	9J	D4	11J	D707	9M
Q5	10I	D7	11H		
Q6	10J	D8	11J		

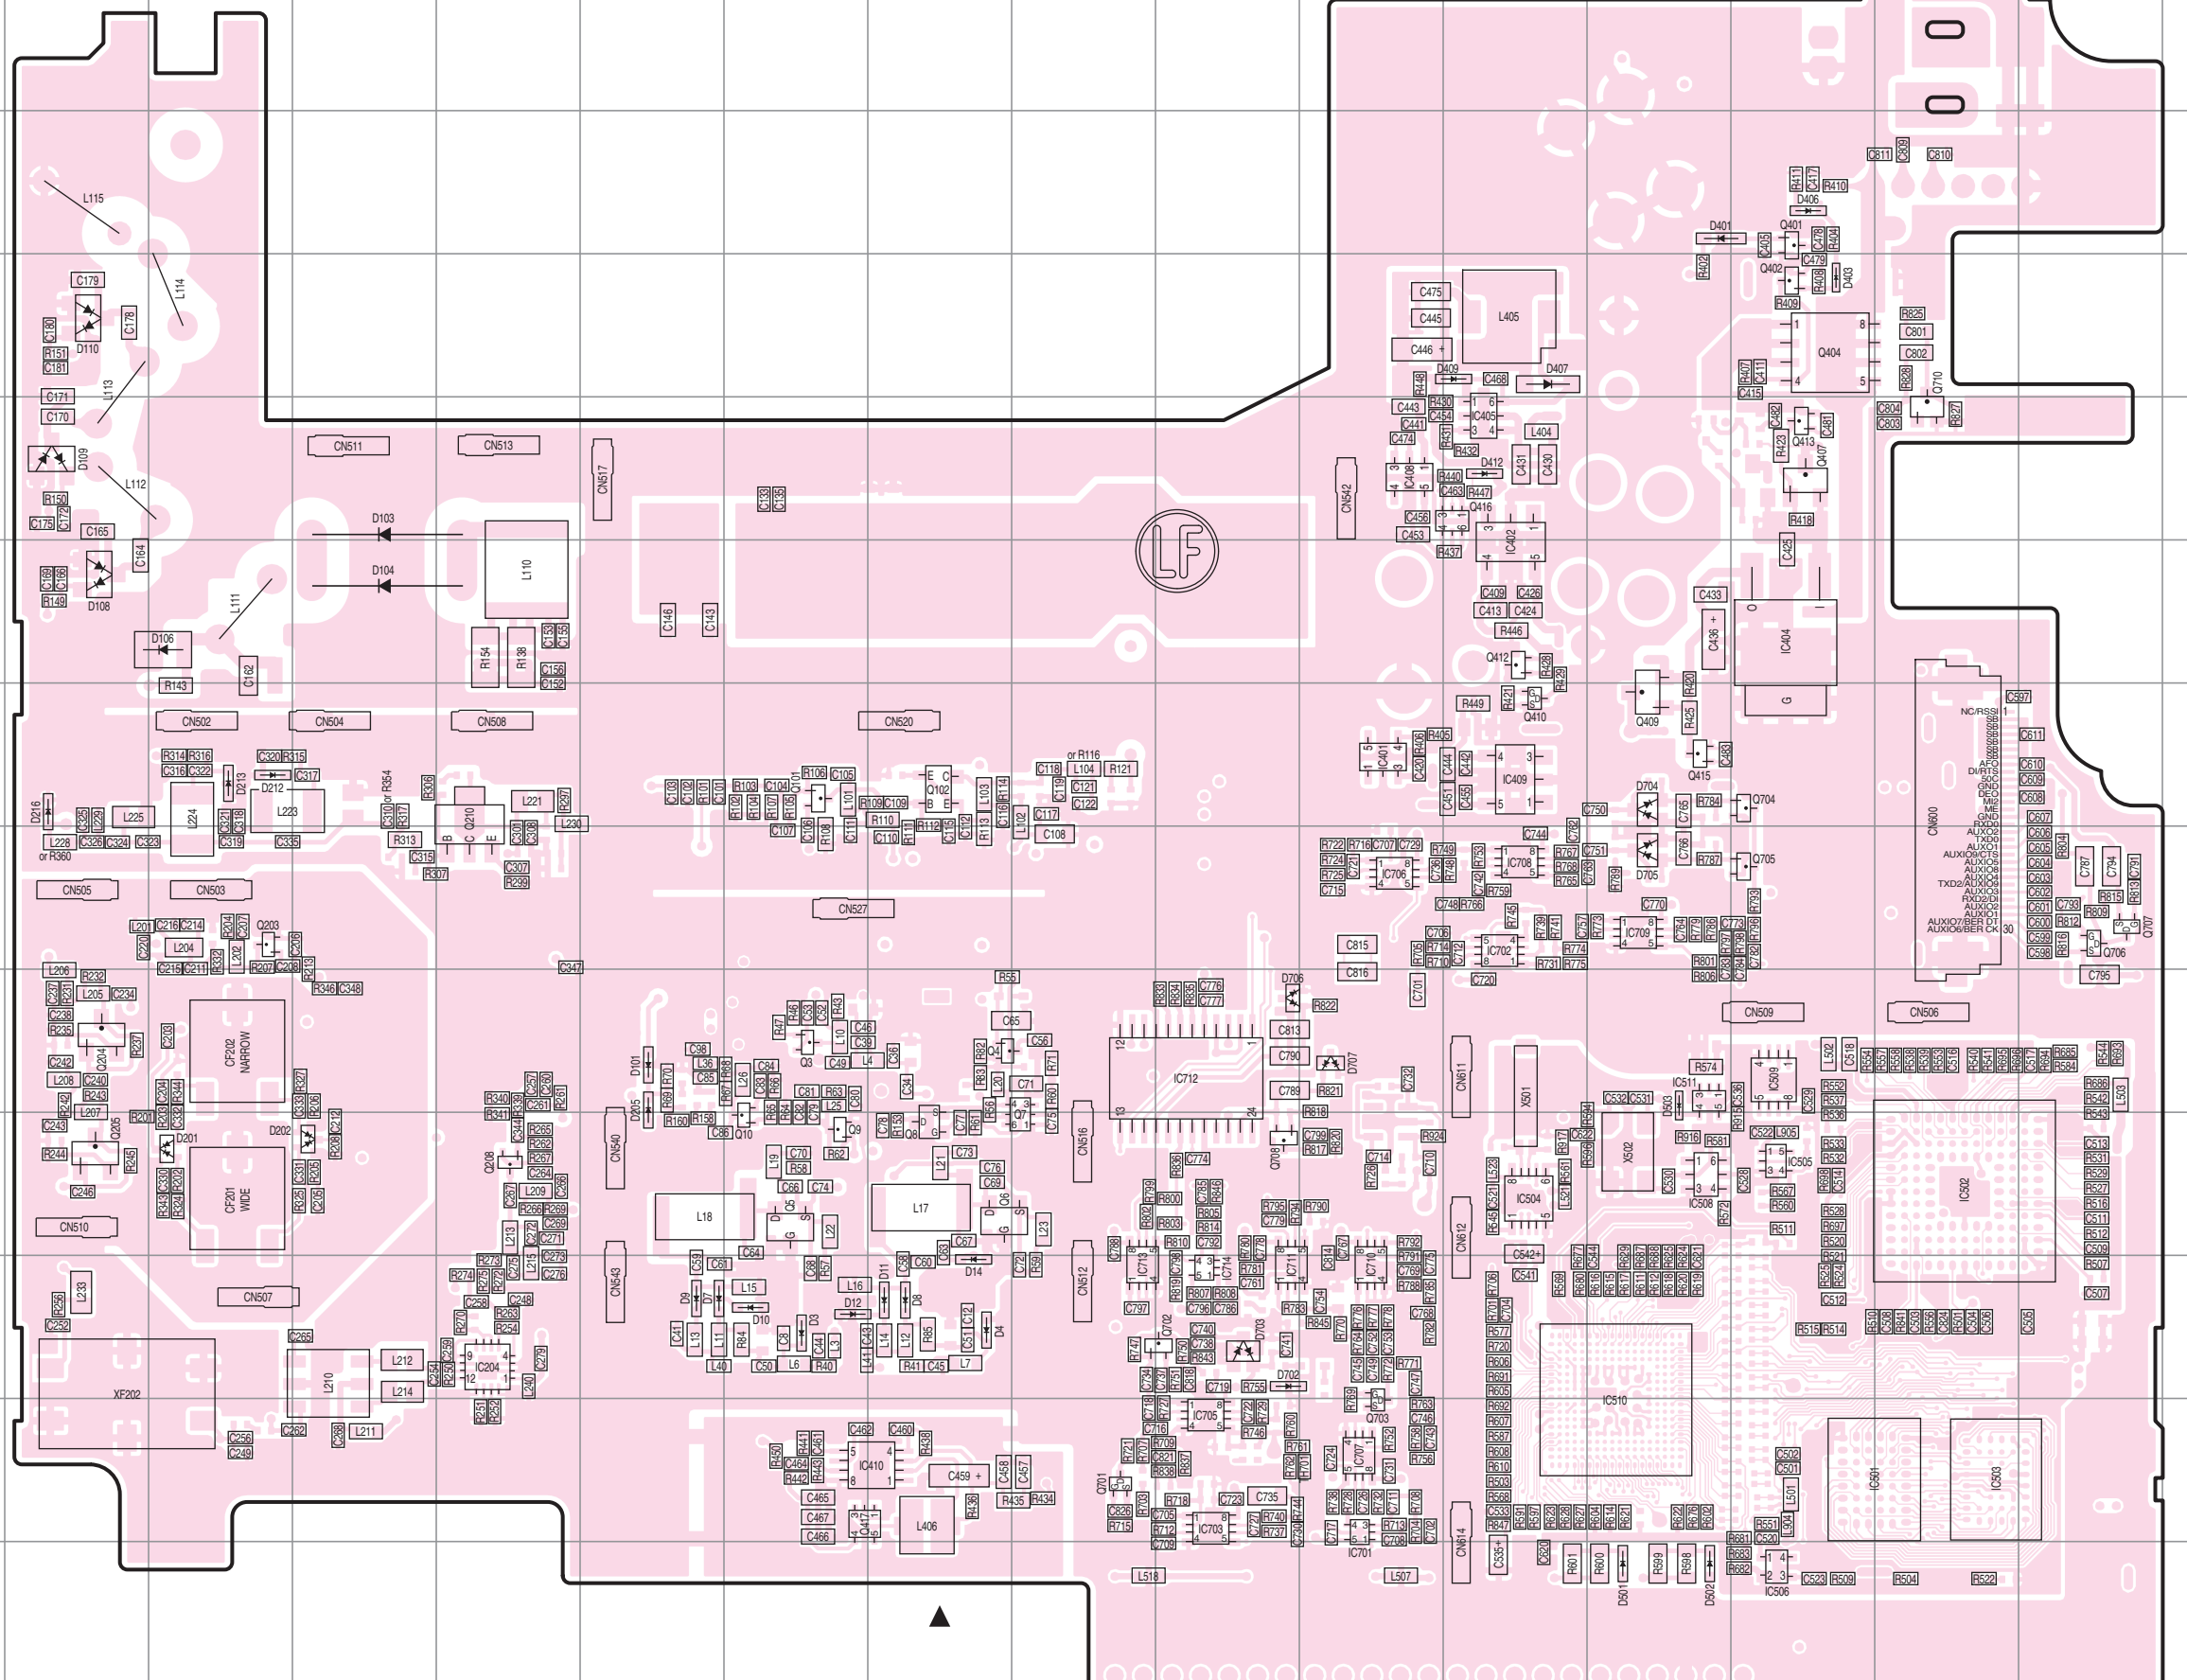


NX-800/800H PC BOARD

TX-RX UNIT (X57-8900-XX) (B/2) -10: K, -11: HK, -13: HK2

TX-RX UNIT (XC1-0990-10) (B/2) : K2


Component side view (J79-0239-29 B/2)

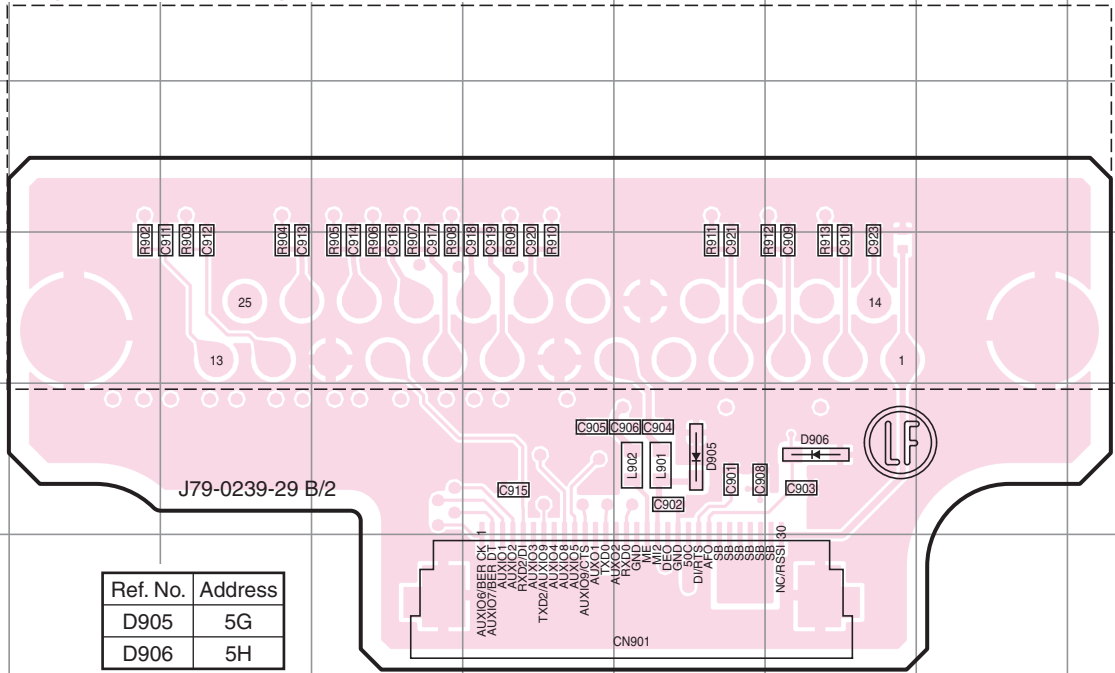

TX-RX UNIT (X57-8900-XX) (B/2) -10: K, -11: HK, -13: HK2

TX-RX UNIT (XC1-0990-10) (B/2) : K2

Foil side view (J79-0239-29 B/2)

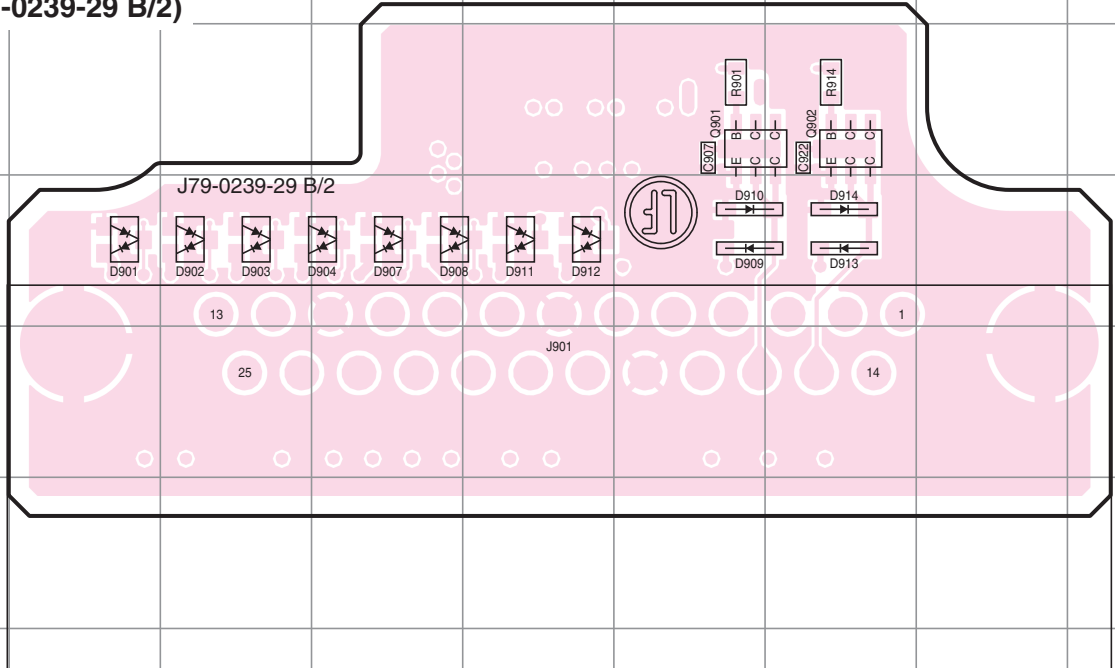


Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
Q901	8G	D904	9E	D911	9F
Q902	8H	D907	9E	D912	9F
D901	9C	D908	9E	D913	9H
D902	9D	D909	9G	D914	9H
D903	9D	D910	9G		

NX-800H PC BOARD


PC BOARD NX-800H

TX-RX UNIT (X57-8900-18) (A/2): HK3
Component side view (J79-0403-09 A/2)

TX-RX UNIT (X57-8900-18) (A/2): HK3
Component side view (J79-0403-09 A/2)

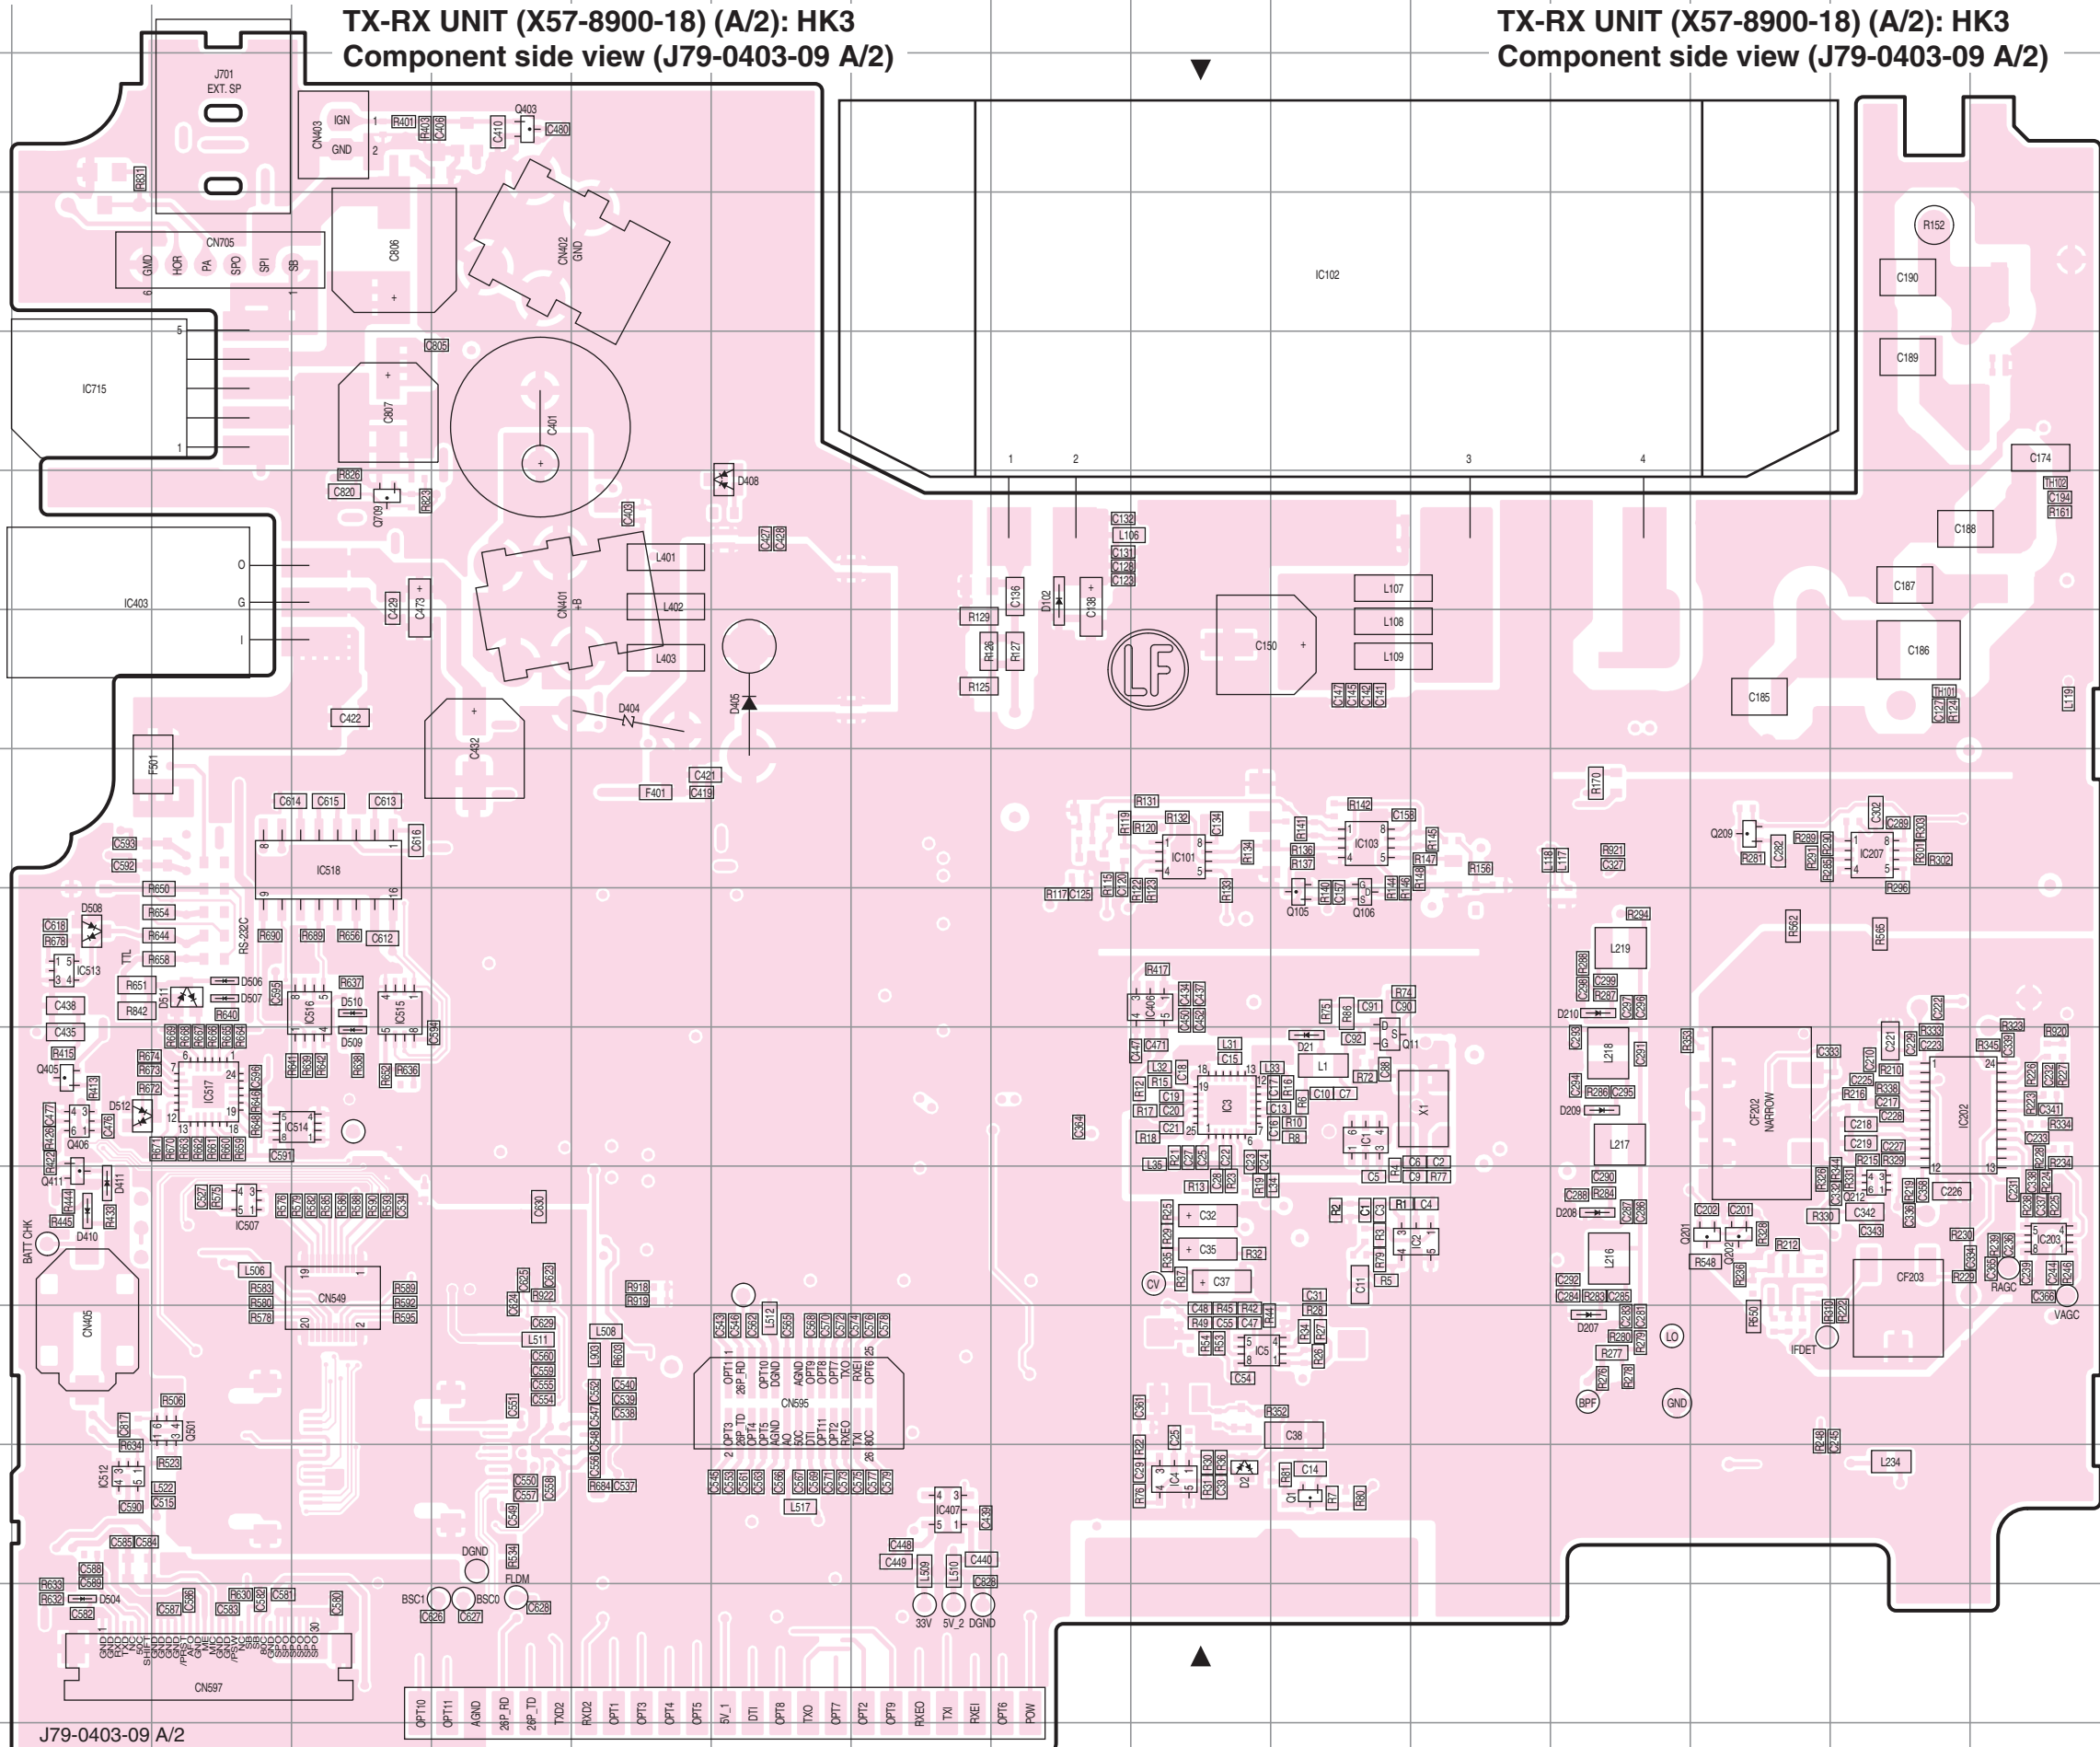

Ref. No.	Address	Ref. No.	Address
IC1	9K	Q209	7N
IC2	10L	Q212	10O
IC3	9J	Q403	2E
IC4	12J	Q405	9B
IC5	11J	Q406	9B
IC101	7J	Q411	10B
IC102	3K	Q501	11C
IC103	7K	Q709	5D
IC202	9O	D2	12J
IC207	7O	D102	5I
IC403	5B	D207	11M
IC406	8J	D208	10M
IC407	12H	D209	9M
IC507	10C	D210	8M
IC512	12B	D404	6F
IC513	8B	D405	6G
IC514	9D	D408	5G
IC515	8D	D410	10B
IC516	8D	D411	10B
IC517	9C	D504	13B
IC518	7D	D506	8C
IC715	4B	D507	8C
Q1	12K	D508	8B
Q11	9K	D509	9D
Q105	8K	D510	8D
Q106	8K	D511	8C
Q201	10N	D512	9B
Q202	10N		



J79-0403-09 A/2

- OPT10
- OPT11
- AGND
- 2P_RD
- 2P_TD
- TXD2
- RXD2
- OPT1
- OPT3
- OPT4
- OPT5
- 5V_1
- DTI
- OPT8
- TXO
- OPT7
- OPT2
- OPT9
- RXED
- TX
- RXEI
- OPT6
- POW



NX-800H PC BOARD

TX-RX UNIT (X57-8900-18) (A/2): HK3
Foil side view (J79-0403-09 A/2)

PC BOARD NX-800H

TX-RX UNIT (X57-8900-18) (A/2): HK3
Foil side view (J79-0403-09 A/2)



Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC204	11F	Q7	10K	D9	11H
IC401	7M	Q8	10J	D10	11I
IC402	6N	Q9	10I	D11	11J
IC404	6P	Q10	10I	D12	11I
IC405	5N	Q101	7I	D14	11J
IC408	5M	Q102	7J	D101	9H
IC409	7N	Q203	8E	D103	5F
IC410	12J	Q204	9D	D104	6F
IC501	12P	Q205	10D	D106	6E
IC502	10Q	Q208	10G	D108	6D
IC503	12Q	Q210	7G	D109	5D
IC504	10N	Q401	3P	D110	4D
IC505	10P	Q402	4P	D201	10E
IC506	13P	Q404	4P	D202	10F
IC508	10O	Q407	5P	D205	9H
IC509	9P	Q409	7O	D212	7E
IC510	12O	Q410	7N	D213	7E
IC511	9O	Q412	6N	D216	7D
IC701	12M	Q413	5P	D401	3O
IC702	8N	Q415	7O	D403	4P
IC703	12L	Q416	5N	D406	3P
C705	12L	Q417	12I	D407	4N
IC706	8M	Q701	12K	D409	4N
IC707	12M	Q702	11L	D412	5N
IC708	8N	Q703	12M	D501	13O
IC709	8O	Q704	7P	D502	13O
IC710	11M	Q705	8P	D503	9O
IC711	11L	Q706	8R	D702	11L
IC712	9L	Q707	8R	D703	11L
IC713	11K	Q708	10L	D704	7O
IC714	11L	Q710	5Q	D705	8O
Q3	9I	D3	11I	D706	9L
Q4	9J	D4	11J	D707	9M
Q5	10I	D7	11H		
Q6	10J	D8	11J		

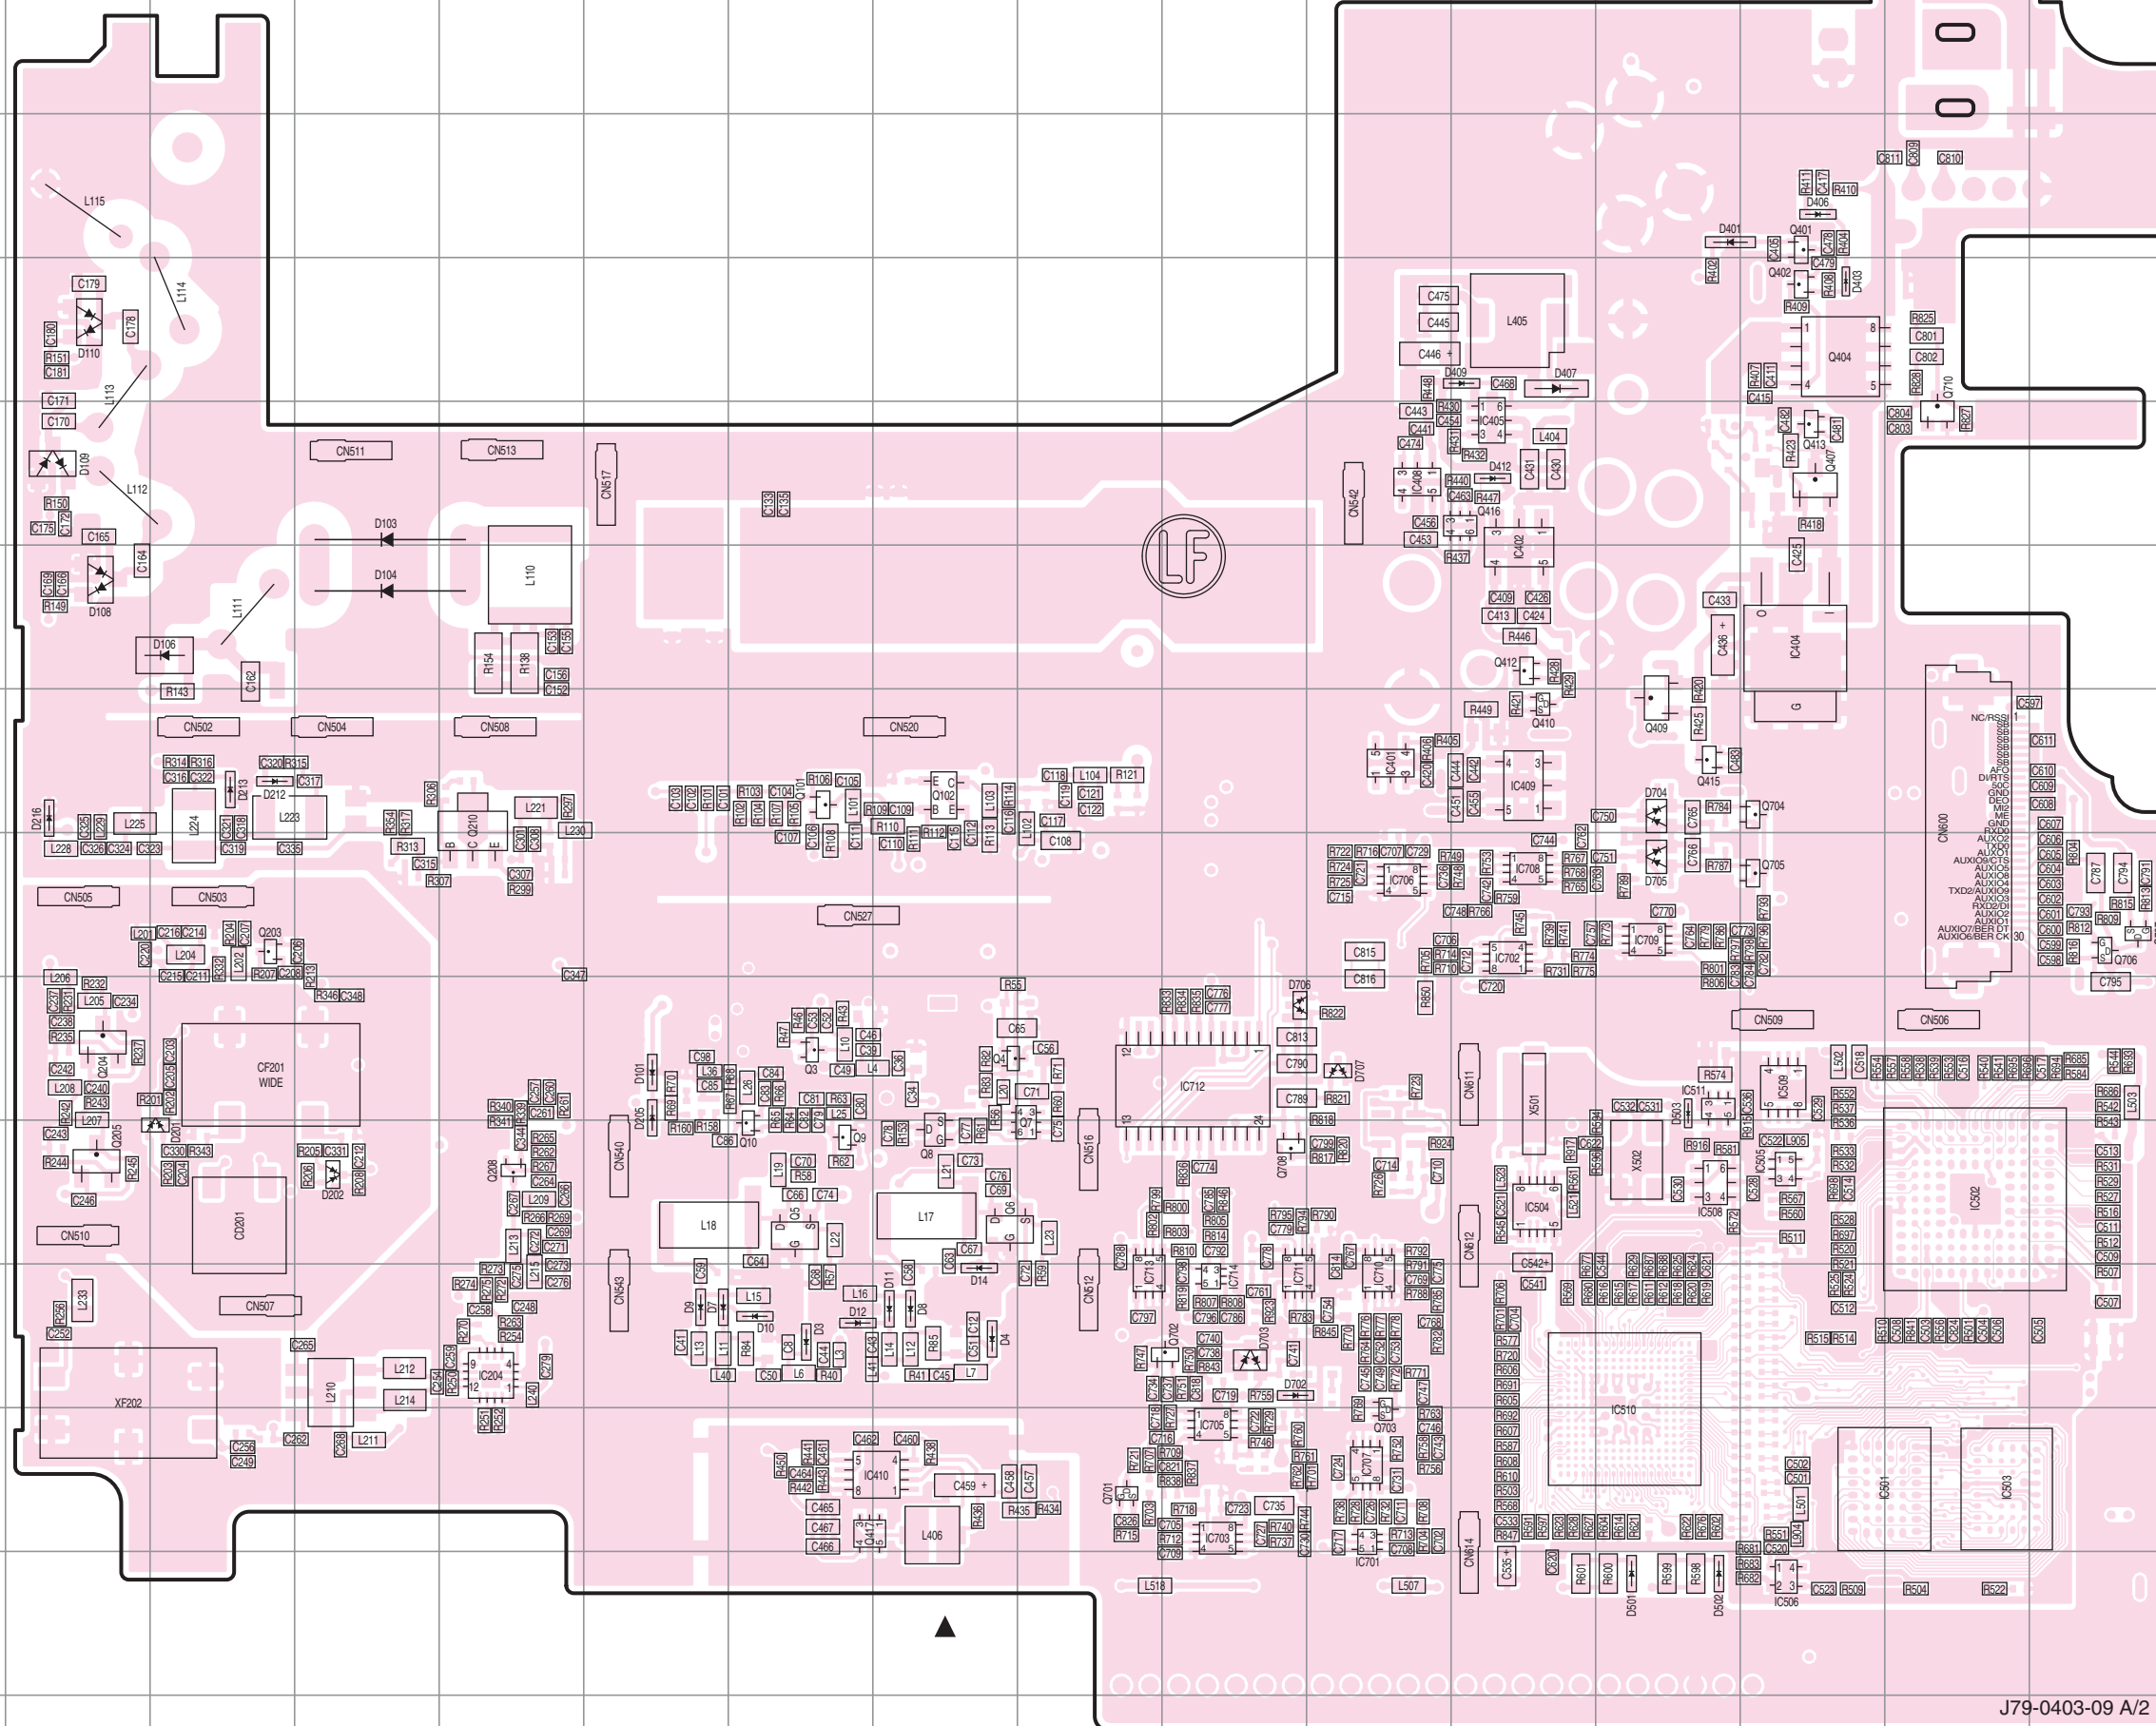

J79-0403-09 A/2



NX-800H PC BOARD

TX-RX UNIT (X57-8900-18) (B/2): HK3 Component side view (J79-0403-09 B/2)

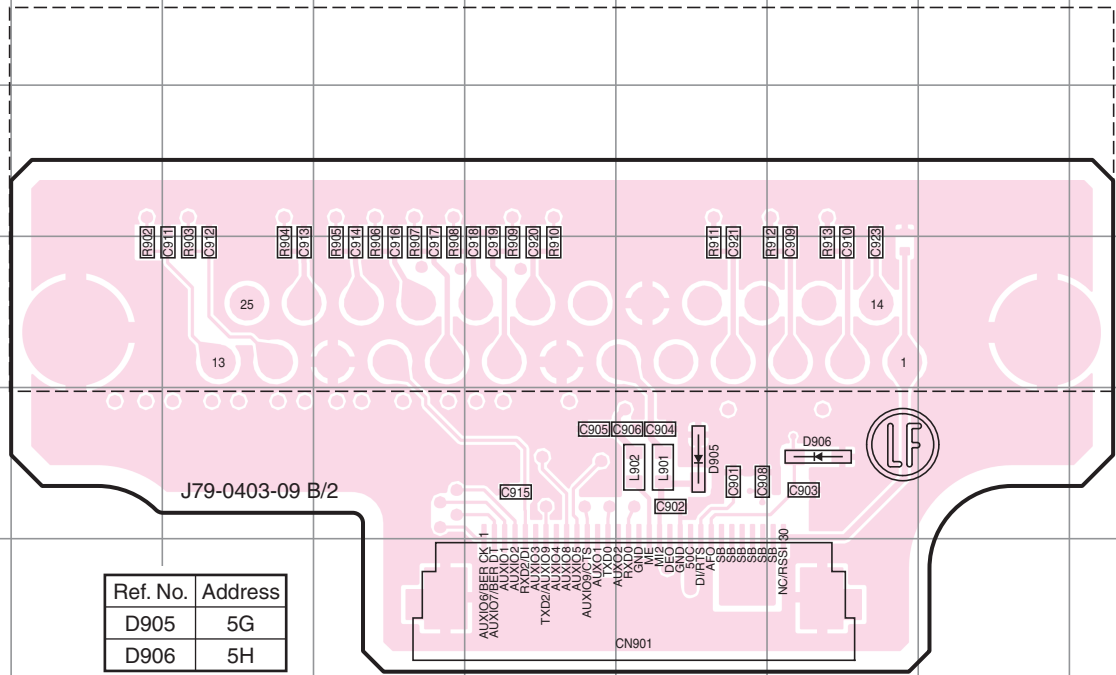

Ref. No.	Address
D905	5G
D906	5H

TX-RX UNIT (X57-8900-18) (B/2): HK3 Foil side view (J79-0403-09 B/2)

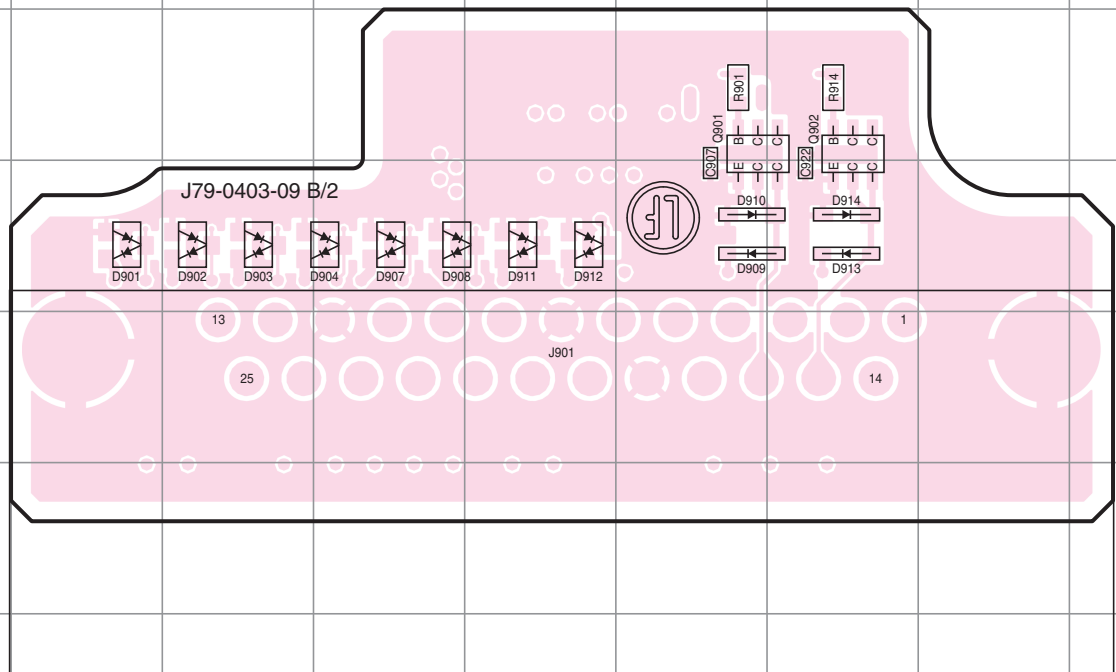

Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
Q901	8G	D904	9E	D911	9F
Q902	8H	D907	9E	D912	9F
D901	9C	D908	9E	D913	9H
D902	9D	D909	9G	D914	9H
D903	9D	D910	9G		

