

Part F Installation

This part of the manual is divided into the sections listed below. These sections give a brief description of the basic rack mounting and wiring procedures for the T837 exciter and T839 power amplifier.

Section	Title	Page
1	T837 Installation	1.1
1.1	Rack Mounting	1.1
1.2	Rack Wiring	1.1
1.3	Power Supply	1.1
1.4	Reverse Polarity & Overvoltage Protection	1.1
2	T838/839 Installation	2.1
2.1	Rack Mounting	2.1
2.2	Rack Wiring	2.1
2.3	Power Supply	2.2
2.4	Reverse Polarity & Overvoltage Protection	2.2
3	N-Type Connector Assembly	3.1

Figure	Title	Page
1.1	T800-41-0002 Double Guide Kit	1.1
1.2	T837 Chassis Connectors	1.1
1.3	T837 D-Range 1 Wiring - Rear View	1.1
2.1	T800-45-0001 PA Guide Kit	2.1
2.2	T838/839 Chassis Connectors	2.1
2.3	T838/839 PA In Latched Position	2.1
2.4	T838/839 D-Range Wiring - Rear View	2.1
3.1	N-Type Plug Assembly Details	3.1

3 N-Type Connector Assembly

Make sure that any N-type plugs connected to Tait equipment are assembled according to the manufacturer's instructions. It is particularly important that the centre pin in the plug is positioned correctly:

- if the pin is positioned too far back in the plug, it may not make good contact with the socket;
- if the pin protrudes too far (as shown in Figure 3.1), or is not straight, it may damage the socket when the plug is screwed in.

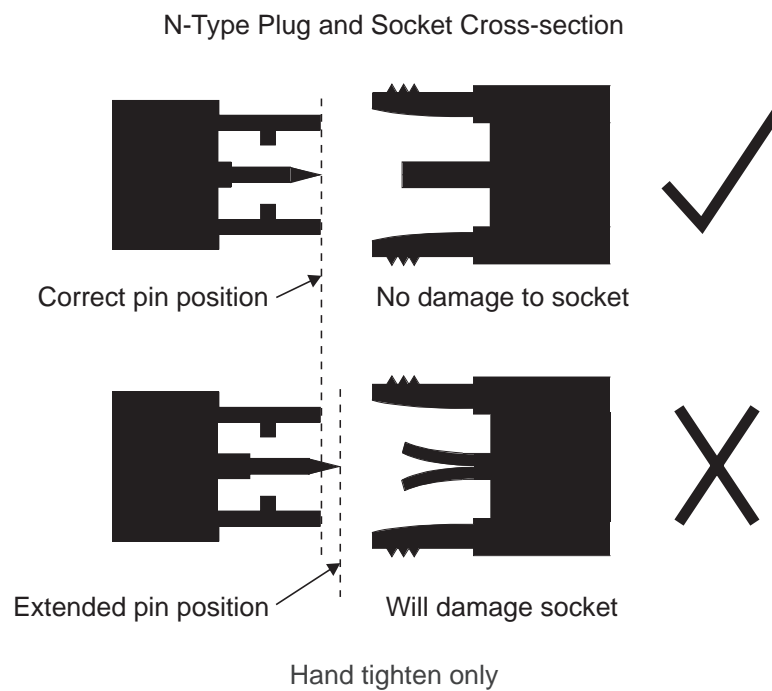


Figure 3.1 N-Type Plug Assembly Details

