

KENWOOD

Document Copyrights

Copyright 2006 by Kenwood Corporation. All rights reserved.

No part of this manual may be reproduced, translated, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, for any purpose without the prior written permission of Kenwood.

Disclaimer

While every precaution has been taken in the preparation of this manual, Kenwood assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein. Kenwood reserves the right to make changes to any products herein at any time for improvement purposes.

TK-3180 K,K2

TK-3180 K3,K4



CONTENTS

GENERAL	2
SYSTEM SET-UP	2
PARTS LIST	3
EXPLODED VIEW	12
PACKING	13
ADJUSTMENT	14
PC BOARD	
DISPLAY UNIT (X54-3470-XX)	26
TX-RX UNIT (X57-6940-XX)	30
SCHMATIC DIAGRAM	
DISPLAY UNIT (X54-3470-XX)	34
TX-RX UNIT (X57-6940-XX)	36
BLOCK DIAGRAM	44
LEVEL DIAGRAM	46
SPECIFICATIONS	47

Does not come with antenna.
Antenna is available as an option.

TK-3180

GENERAL / SYSTEM SET-UP

INTRODUCTION

SCOPE OF THIS MANUAL

This manual is intended for use by experienced technicians familiar with similar types of commercial grade communications equipment. It contains all required service information for the equipment and is current as of the publication date. Changes which may occur after publication are covered by either Service Bulletins or Manual Revisions. These are issued as required.

ORDERING REPLACEMENT PARTS

When ordering replacement parts or equipment information, the full part identification number should be included. This applies to all parts : components, kits, or chassis. If the part number is not known, include the chassis or kit number of which it is a part, and a sufficient description of the required component for proper identification.

PERSONNEL SAFETY

The following precautions are recommended for personnel safety:

- DO NOT transmit until all RF connectors are verified secure and any open connectors are properly terminated.
- SHUT OFF and DO NOT operate this equipment near electrical blasting caps or in an explosive atmosphere.
- This equipment should be serviced by a qualified technician only.


SERVICE

This transceiver is designed for easy servicing. Refer to the schematic diagrams, printed circuit board views, and alignment procedures contained within.

SERVICE MANUAL LIST

Title	Part Number	Remarks	Destination
TK-3180	B51-8690-00		K,K3
TK-3180	B51-8699-00 (This service manual)	SUPPLEMENT	K2,K4

SYSTEM SET-UP

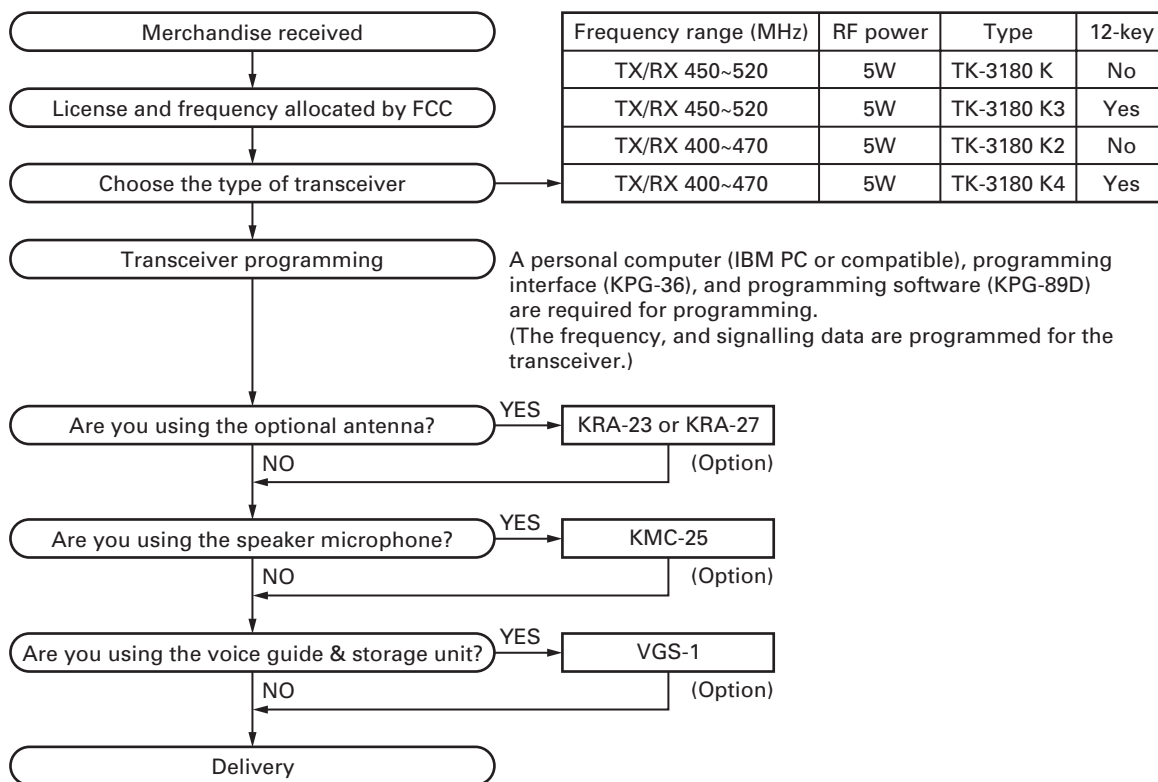

PARTS LIST

* New Parts. Δ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia

Y : PX (Far East, Hawaii)

Y : AAFES (Europe)

K : USA

T : England

X : Australia

P : Canada

E : Europe

M : Other Areas

TK-3180 (Y50-5880-XX)

DISPLAY UNIT (X54-3470-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
TK-3180											
1	1B		A02-3847-03	PLASTIC CABINET ASSY	K,K2	55	3A		J82-0091-15	FPC (PTT)	
2	1A		A02-3848-03	PLASTIC CABINET ASSY	K3,K4	57	1A		K29-9302-23	KNOB (PTT)	
3	3A		A10-4076-21	CHASSIS		58	1A		K29-9303-03	BUTTON KNOB (SIDE)	
4	3B		A62-1093-02	PANEL		59	1B		K29-9304-03	KNOB (VOLUME)	
6	2D		B09-0625-03	CAP ACCESSORY		60	1A		K29-9305-03	KNOB (CH SELECTOR)	
7	1A		B10-2752-22	FRONT GLASS		A	2D		N08-0548-04	DRESSED SCREW ACCESSORY	
8	2A		B11-1815-04	FILTER (LCD)		B	3B		N09-2426-04	HEXAGON HEAD SCREW	
9	2A		B11-1816-12	ILLUMINATION GUIDE (LCD)		C	3B		N14-0806-04	CIRCULAR NUT (VOLUME)	
10	3B		B11-1820-04	ILLUMINATION GUIDE (BUSY/TX)		D	3B		N14-0810-04	CIRCULAR NUT (CH SELECTOR)	
11	2A		B38-0900-05	LCD ASSY		E	2A,3A		N30-2004-45	PAN HEAD MACHINE SCREW	
12	2C		B62-1759-10	INSTRUCTION MANUAL		F	2B		N30-2604-46	PAN HEAD MACHINE SCREW	
13	3A		B72-2260-04	MODEL NAME-PLATE	K	G	3A		N30-2608-45	PAN HEAD MACHINE SCREW	
13	3A	*	B72-2261-04	MODEL NAME-PLATE	K2	H	2C		N30-3008-60	PAN HEAD MACHINE SCREW ACC	
13	3A		B72-2262-04	MODEL NAME-PLATE	K3	J	2A,2B		N83-2005-46	PAN HEAD TAPTITE SCREW	
13	3A	*	B72-2263-04	MODEL NAME-PLATE	K4	62	3B		R31-0652-05	VARIABLE RESISTOR	
15	2B		E04-0416-05	RF COAXIAL RECEPTACLE (SMA)		64	2B		S60-0430-05	ROTARY SWITCH	
16	3B		E23-1104-04	TERMINAL		66	1A		T07-0749-15	SPEAKER	
17	2A		E37-1101-05	SPEAKER WIRE (RED)		68	3A		W09-0971-05	LITHIUM CELL	
18	2A		E37-1102-05	SPEAKER WIRE (BLACK)		DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4					
19	2A		E37-1107-05	FLAT CABLE		D501,502			B30-2215-05	LED	
20	3B		E58-0511-05	RECTANGULAR RECEPTACLE		D511-516			B30-2215-05	LED	K3,K4
21	3B		E72-0419-03	TERMINAL BLOCK		D517-520			B30-2210-05	LED (TLY)	
23	3A		F07-1880-04	COVER		C500-503			CK73HB1H471K	CHIP C 470PF	K
24	2B	*	F12-0476-04	SHIELDING SHEET		C508			CK73HB1H471K	CHIP C 470PF	K
25	2B	*	F12-0477-04	SHIELDING SHEET		C513			CK73GB1C104K	CHIP C 0.10UF	K
26	2A	*	F15-1012-04	SHADE		C518			CK73HB1H471K	CHIP C 470PF	K
27	3B		F20-3350-04	INSULATING SHEET		C522			CK73HB1H102K	CHIP C 1000PF	K
29	2A	*	G10-1340-04	FIBROUS SHEET		C523,524			C92-0827-05	CHIP-TAN 4.7UF	10WV
30	2A	*	G10-1341-04	FIBROUS SHEET		C525			CK73HB1H471K	CHIP C 470PF	K
31	2A		G11-4272-04	RUBBER CUSHION		C527,528			C92-0826-05	CHIP-TAN 1.0UF	16WV
32	3A		G11-4273-14	SHEET		C537,538			CK73GB0J475K	CHIP C 4.7UF	K
33	3A	*	G11-4308-14	RUBBER SHEET (FINAL FET)		C539-546			CC73HCH1H470J	CHIP C 47PF	J
34	1A	*	G11-4326-04	SHEET		C548-551			CC73HCH1H470J	CHIP C 47PF	J
35	3A		G11-4332-04	SHEET		C553,554			CK73HB1H102K	CHIP C 1000PF	K
36	2B		G13-1934-04	CUSHION		C555			CK73HB0J105K	CHIP C 1.0UF	K
37	2A		G13-2055-04	CUSHION		C556			CK73HB1H102K	CHIP C 1000PF	K
38	2A	*	G13-2068-04	CUSHION		C562			CK73HB0J105K	CHIP C 1.0UF	K
39	2B		G53-1598-01	PACKING	K,K2	CN507			E40-6410-05	FLAT CABLE CONNECTOR	
40	1A		G53-1599-01	PACKING	K3,K4	CN508,509			E40-6413-05	FLAT CABLE CONNECTOR	
41	3B	*	G53-1600-12	PACKING		L550			L92-0163-05	BEADS CORE	
42	3B		G53-1601-04	PACKING		L553,554			L92-0419-15	CHIP FERRITE	
43	3A		G53-1602-14	PACKING		L555			L92-0163-05	BEADS CORE	
44	2B,3B		G53-1603-04	PACKING		CP501			RK75HA1J102J	CHIP-COM 1.0K J	1/16W
46	2C,1D		H12-3157-02	PACKING FIXTURE		CP503,504			RK75HA1J102J	CHIP-COM 1.0K J	1/16W
47	3D		H52-2060-02	ITEM CARTON CASE		CP506,507			RK75HA1J102J	CHIP-COM 1.0K J	1/16W
49	2A		J19-5460-02	HOLDER		CP509			RK75HA1J102J	CHIP-COM 1.0K J	1/16W
50	2B		J19-5478-03	HOLDER		R500,501			RK73HB1J102J	CHIP R 1.0K J	1/16W
51	2C		J29-0710-05	HOOK ACCESSORY							
52	3B		J30-1279-04	SPACER							
53	2B		J82-0089-05	FPC (VOLUME/SELCTOR)							
54	3B		J82-0090-15	FPC (UNIVERSAL CONNECTOR)							

PARTS LIST

DISPLAY UNIT (X54-3470-XX)

TX-RX UNIT (X57-6940-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R517			R92-1368-05	CHIP R 0 OHM	
R518			RK73HB1J331J	CHIP R 330 J 1/16W	
R520			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R522			RK73HB1J391J	CHIP R 390 J 1/16W	
R524-526			RK73HB1J391J	CHIP R 390 J 1/16W	K3,K4
R527			R92-1368-05	CHIP R 0 OHM	
R531			R92-1368-05	CHIP R 0 OHM	
R533			R92-1368-05	CHIP R 0 OHM	
R534			RK73HB1J101J	CHIP R 100 J 1/16W	
R535			R92-1368-05	CHIP R 0 OHM	
R537			RK73HB1J101J	CHIP R 100 J 1/16W	
R540-543			RK73HB1J471J	CHIP R 470 J 1/16W	
R544			RK73HB1J184J	CHIP R 180K J 1/16W	
R545			RK73HB1J474D	CHIP R 470K D 1/16W	
R546			RK73HB1J273D	CHIP R 27K D 1/16W	
R547			RK73HB1J223J	CHIP R 22K J 1/16W	
R552			RK73HB1J471J	CHIP R 470 J 1/16W	
R559			R92-1368-05	CHIP R 0 OHM	
R560			RK73HB1J474J	CHIP R 470K J 1/16W	
R561			RK73HB1J103J	CHIP R 10K J 1/16W	
R562-568			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R570			R92-1252-05	CHIP R 0 OHM J 1/16W	
R571			R92-1368-05	CHIP R 0 OHM	
R573			RK73HB1J474J	CHIP R 470K J 1/16W	
R574,575			R92-1368-05	CHIP R 0 OHM	
MIC500	2A		T91-0579-05	MIC ELEMENT	
D500			MA2S111	DIODE	
D522			DA221	DIODE	
IC500			BU2099FV	MOS-IC	
IC501			XC6201P352MR	MOS-IC	
IC502,503			HD74LV2G34AUS	MOS-IC	
Q501			2SC4617(S)	TRANSISTOR	
Q502			2SB1132(Q,R)	TRANSISTOR	
Q504			2SK1830	FET	
Q505		*	2SJ144(Y)	FET	
TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4					
D400			B30-2278-05	LED (RED/YELLOW)	
C1,2			CC73HCH1H101J	CHIP C 100PF J	
C3			CC73HCH1H100C	CHIP C 10PF C	
C4			CK73HB1C103K	CHIP C 0.010UF K	
C5			CC73HCH1H100C	CHIP C 10PF C	
C6			CK73HB1H102K	CHIP C 1000PF K	
C7,8			CC73HCH1H470J	CHIP C 47PF J	
C9-13			CC73HCH1H101J	CHIP C 100PF J	
C14-16			CC73HCH1H470J	CHIP C 47PF J	
C17			CC73HCH1H080B	CHIP C 8.0PF B	K,K3
C17			CC73HCH1H120G	CHIP C 12PF G	K2,K4
C18			CC73HCH1H101J	CHIP C 100PF J	
C19			CC73HCH1H090B	CHIP C 9.0PF B	K,K3
C19			CC73HCH1H100B	CHIP C 10PF B	K2,K4
C20			CC73HCH1H101J	CHIP C 100PF J	
C21			CK73HB1C223K	CHIP C 0.022UF K	
C22			CC73HCH1H1R5B	CHIP C 1.5PF B	
C23			CC73HCH1H020B	CHIP C 2.0PF B	K2,K4
C23			CC73HCH1H030B	CHIP C 3.0PF B	K,K3
C24			C92-0001-05	CHIP-TAN 0.1UF 35WV	
C25			C92-0588-05	CHIP-TAN 1.5UF 16WV	
C26			CC73HCH1H030B	CHIP C 3.0PF B	K,K3
C26			CC73HCH1H060B	CHIP C 6.0PF B	K2,K4
C27			CC73HCH1H020B	CHIP C 2.0PF B	K,K3
C27			CC73HCH1H2R5B	CHIP C 2.5PF B	K2,K4
C28			CC73HCH1H050B	CHIP C 5.0PF B	K,K3
C28			CC73HCH1H090B	CHIP C 9.0PF B	K2,K4
C29			CC73HCH1H470J	CHIP C 47PF J	
C30			C92-0001-05	CHIP-TAN 0.1UF 35WV	
C31			CC73HCH1H470J	CHIP C 47PF J	
C32,33			CC73HCH1H101J	CHIP C 100PF J	
C35			CC73HCH1H470J	CHIP C 47PF J	
C37			CC73HCH1H470J	CHIP C 47PF J	
C38			CC73GCH1H560J	CHIP C 56PF J	K,K3
C38			CC73GCH1H820J	CHIP C 82PF J	K2,K4
C41			CC73GCH1H121J	CHIP C 120PF J	K2,K4
C41			CC73GCH1H820J	CHIP C 82PF J	K,K3
C43			CK73HBOJ105K	CHIP C 1.0UF K	
C44			CC73HCH1H130J	CHIP C 13PF J	K,K3
C44			CC73HCH1H150J	CHIP C 15PF J	K2,K4
C45			CC73HCH1H090B	CHIP C 9.0PF B	
C46			CC73HCH1H030B	CHIP C 3.0PF B	K2,K4
C46			CC73HCH1H040B	CHIP C 4.0PF B	K,K3
C47			CC73HCH1H010B	CHIP C 1.0PF B	K2,K4
C47			CC73HCH1H020B	CHIP C 2.0PF B	K,K3
C48			CC73HCH1HR75B	CHIP C 0.75PF B	
C49			CC73HCH1H2R5B	CHIP C 2.5PF B	K2,K4
C49,50			CC73HCH1H020B	CHIP C 2.0PF B	K,K3
C50			CC73HCH1H030B	CHIP C 3.0PF B	K2,K4
C51			CC73HCH1H050B	CHIP C 5.0PF B	K,K3
C51			CC73HCH1H070B	CHIP C 7.0PF B	K2,K4
C52			CC73HCH1H040B	CHIP C 4.0PF B	
C53			CC73HCH1H101J	CHIP C 100PF J	K,K3
C53			CC73HCH1H330J	CHIP C 33PF J	K2,K4
C54			CC73HCH1H060B	CHIP C 6.0PF B	K,K3
C54			CC73HCH1H070B	CHIP C 7.0PF B	K2,K4
C55			CC73HCH1H040B	CHIP C 4.0PF B	
C56			CC73HCH1H101J	CHIP C 100PF J	
C57,58			CC73GCH1H0R5B	CHIP C 0.5PF B	
C59-62			CC73HCH1H101J	CHIP C 100PF J	
C63			C92-0713-05	CHIP-TAN 10UF 6.3WV	
C64			CC73HCH1H101J	CHIP C 100PF J	
C65			CC73HCH1H070D	CHIP C 7.0PF D	
C66			CC73HCH1H100C	CHIP C 10PF C	
C67			CC73HCH1H100C	CHIP C 10PF C	K2,K4
C67			CC73HCH1H330J	CHIP C 33PF J	K,K3
C68-70			CK73HB1H471K	CHIP C 470PF K	
C71			CC73HCH1H070D	CHIP C 7.0PF D	
C72-74			CC73HCH1H470J	CHIP C 47PF J	
C75			CC73HCH1H030B	CHIP C 3.0PF B	K,K3
C75			CC73HCH1H040B	CHIP C 4.0PF B	K2,K4
C78			CC73HCH1H101J	CHIP C 100PF J	
C79			CK73HB1H222K	CHIP C 2200PF K	
C100,101			CK73HB1H471K	CHIP C 470PF K	
C103,104			CK73HB1H471K	CHIP C 470PF K	
C105			CC73HCH1H060D	CHIP C 6.0PF D	K2,K4
C105			CC73HCH1H070D	CHIP C 7.0PF D	K,K3
C106,107			CK73HB1H471K	CHIP C 470PF K	
C109			CK73HB1H471K	CHIP C 470PF K	
C111			CK73HB1A104K	CHIP C 0.10UF K	
C113			CK73HB1H471K	CHIP C 470PF K	

PARTS LIST

TX-RX UNIT (X57-6940-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C114			CC73HCH1H090D	CHIP C 9.0PF D	K2,K4	C214			C92-0773-05	CHIP-TAN 15UF 6.3WV	
C114			CC73HCH1H100C	CHIP C 10PF C	K,K3	C215,216			CK73HB1A104K	CHIP C 0.10UF K	
C116			CK73HB1H471K	CHIP C 470PF K		C217			CC73HCH1H680J	CHIP C 68PF J	
C117			CK73HB1A104K	CHIP C 0.10UF K		C218			CC73HCH1H470J	CHIP C 47PF J	
C118			CC73HCH1H220J	CHIP C 22PF J	K2,K4	C219			CK73HB1A333K	CHIP C 0.033UF K	
C118			CC73HCH1H330J	CHIP C 33PF J	K,K3	C220			CK73HB1C103K	CHIP C 0.010UF K	
C119,120			CC73HCH1H100C	CHIP C 10PF C		C221			C92-0713-05	CHIP-TAN 10UF 6.3WV	
C121			CK73GB1E105K	CHIP C 1.0UF K		C222			CK73HB1A104K	CHIP C 0.10UF K	
C122			CK73HB1H471K	CHIP C 470PF K		C226			CK73HB1H471K	CHIP C 470PF K	
C123			C92-0565-05	CHIP-TAN 6.8UF 10WV		C227,228			CK73HB1C103K	CHIP C 0.010UF K	
C125-128			CK73HB1H471K	CHIP C 470PF K		C229			CC73HCH1H040B	CHIP C 4.0PF B	
C129			CC73HCH1H180J	CHIP C 18PF J	K,K3	C230			CC73HCH1H270J	CHIP C 27PF J	
C129			CC73HCH1H270J	CHIP C 27PF J	K2,K4	C231			CC73HCH1H040B	CHIP C 4.0PF B	
C131			CK73HB1H471K	CHIP C 470PF K		C232			CK73HB1C103K	CHIP C 0.010UF K	
C132			CC73HCH1H101J	CHIP C 100PF J		C233			CK73HB1H471K	CHIP C 470PF K	
C133			CK73HB1H471K	CHIP C 470PF K		C234			CK73HB1A104K	CHIP C 0.10UF K	
C134			C93-0765-05	CHIP C 51PF 50WV	K2,K4	C235,236			CK73HB1C103K	CHIP C 0.010UF K	
C135			CK73HB1H471K	CHIP C 470PF K		C237			CK73HB1H471K	CHIP C 470PF K	
C136			CK73HB1C103K	CHIP C 0.010UF K		C238			CC73HCH1H060D	CHIP C 6.0PF D	K,K3
C137			C93-0764-05	CHIP C 47PF 50WV	K,K3	C238			CC73HCH1H100D	CHIP C 10PF D	K2,K4
C138			CK73HB1H471K	CHIP C 470PF K		C239			CC73HCH1H090B	CHIP C 9.0PF B	
C139			CK73GB1C104K	CHIP C 0.10UF K		C240			CC73HCH1H020B	CHIP C 2.0PF B	K,K3
C140			CK73GB1E105K	CHIP C 1.0UF K		C240			CC73HCH1H040B	CHIP C 4.0PF B	K2,K4
C141			C93-0754-05	CHIP C 18PF J	K,K3	C241			CC73HCH1H100C	CHIP C 10PF C	K,K3
C142			C93-0760-05	CHIP C 33PF 50WV	K,K3	C241			CC73HCH1H120G	CHIP C 12PF G	K2,K4
C142			C93-0764-05	CHIP C 47PF 50WV	K2,K4	C242			CK73HB1H471K	CHIP C 470PF K	
C143			CK73HB1C103K	CHIP C 0.010UF K		C243			CK73HB1C103K	CHIP C 0.010UF K	
C144			CK73HB1H471K	CHIP C 470PF K		C244			CC73HCH1H020B	CHIP C 2.0PF B	K,K3
C145			C93-0753-05	CHIP C 16PF 50WV	K2,K4	C244			CC73HCH1H040B	CHIP C 4.0PF B	K2,K4
C149			CC73GCH1H101J	CHIP C 100PF J		C245			CK73HB1H471K	CHIP C 470PF K	
C150			CK73HB1H471K	CHIP C 470PF K		C246			CC73HCH1H100C	CHIP C 10PF C	K,K3
C151			CC73GCH1H030B	CHIP C 3.0PF B		C246			CC73HCH1H120G	CHIP C 12PF G	K2,K4
C152			CC73GCH1H101J	CHIP C 100PF J	K,K3	C247			CC73HCH1H040B	CHIP C 4.0PF B	K,K3
C152			CC73GCH1H470J	CHIP C 47PF J	K2,K4	C247			CC73HCH1H050B	CHIP C 5.0PF B	K2,K4
C153			CC73HCH1H050B	CHIP C 5.0PF B	K,K3	C248			CK73HB1H471K	CHIP C 470PF K	
C153			CC73HCH1H070B	CHIP C 7.0PF B	K2,K4	C250			CK73HB1H471K	CHIP C 470PF K	
C154			CC73HCH1H1R5B	CHIP C 1.5PF B	K,K3	C251			CC73HCH1H040B	CHIP C 4.0PF B	K2,K4
C154			CC73HCH1H2R5B	CHIP C 2.5PF B	K2,K4	C251			CC73HCH1H3R5B	CHIP C 3.5PF B	K,K3
C155			CC73HCH1H060B	CHIP C 6.0PF B	K,K3	C252			CC73HCH1H330J	CHIP C 33PF J	
C155			CC73HCH1H100B	CHIP C 10PF B	K2,K4	C253			CK73HB1H471K	CHIP C 470PF K	
C156			CC73GCH1H020B	CHIP C 2.0PF B		C255			CC73GCH1HR75B	CHIP C 0.75PF B	K,K3
C157			CC73GCH1H070B	CHIP C 7.0PF B	K,K3	C255			CC73GCH1H010B	CHIP C 1.0PF B	K2,K4
C157			CC73HCH1H110J	CHIP C 11PF J	K2,K4	C256			CC73GCH1H040B	CHIP C 4.0PF B	K2,K4
C159			CC73HCH1H040B	CHIP C 4.0PF B	K,K3	C256			CC73GCH1H3R5B	CHIP C 3.5PF B	K,K3
C159			CC73HCH1H050B	CHIP C 5.0PF B	K2,K4	C257			CC73HCH1H330J	CHIP C 33PF J	
C161			C93-0744-05	CHIP C 6.0PF 50WV	K2,K4	C258			CK73HB1H471K	CHIP C 470PF K	
C161			C93-0745-05	CHIP C 7.0PF 50WV	K,K3	C260			CC73GCH1H010B	CHIP C 1.0PF B	
C163		*	C93-0757-05	CHIP C 24PF 50WV	K2,K4	C261			CK73HB1H471K	CHIP C 470PF K	
C200			CK73HB1A104K	CHIP C 0.10UF K		C262			CC73HCH1H330J	CHIP C 33PF J	
C201			CK73HB1C103K	CHIP C 0.010UF K		C263			CC73HCH1H040B	CHIP C 4.0PF B	
C202			CK73HB1C223K	CHIP C 0.022UF K		C264			C92-0714-05	CHIP-TAN 4.7UF 6.3WV	
C203			CK73HB1H102K	CHIP C 1000PF K		C265,266			CK73HB1H471K	CHIP C 470PF K	
C204			CK73HB1A104K	CHIP C 0.10UF K		C269,270			CK73HB1H471K	CHIP C 470PF K	
C205			CK73HB1C103K	CHIP C 0.010UF K		C271			CK73HB0J105K	CHIP C 1.0UF K	
C206			CK73HB1H102K	CHIP C 1000PF K		C273-275			CK73HB1H471K	CHIP C 470PF K	
C207			CK73HB1A104K	CHIP C 0.10UF K		C276			CC73GCH1H2R5B	CHIP C 2.5PF B	K,K3
C208			CK73HB1H182K	CHIP C 1800PF K		C276			CC73GCH1H3R5B	CHIP C 3.5PF B	K2,K4
C209,210			CK73HB1A104K	CHIP C 0.10UF K		C277			CC73HCH1H330J	CHIP C 33PF J	
C211,212			CK73HB1H221K	CHIP C 220PF K		C279			CC73GCH1H1R5B	CHIP C 1.5PF B	
C213			CC73HCH1H101J	CHIP C 100PF J		C280			CK73HB1H471K	CHIP C 470PF K	

PARTS LIST

TX-RX UNIT (X57-6940-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C281			CC73HCH1H330J	CHIP C 33PF J		C608			CK73HB1A104K	CHIP C 0.10UF K	
C282			CC73HCH1H010B	CHIP C 1.0PF B	K,K3	C609,610			CK73HB1C103K	CHIP C 0.010UF K	
C282			CC73HCH1H1R5B	CHIP C 1.5PF B	K2,K4	C611			CC73HCH1H101J	CHIP C 100PF J	
C283			CC73HCH1H050B	CHIP C 5.0PF B		C612,613			CK73HB1A104K	CHIP C 0.10UF K	
C284			CC73GCH1H030B	CHIP C 3.0PF B		C614			CK73HB1H471K	CHIP C 470PF K	
C285			CK73HB1H471K	CHIP C 470PF K		C615			CC73HCH1H101J	CHIP C 100PF J	
C286			CC73GCH1H101J	CHIP C 100PF J		C616			CK73HB1H471K	CHIP C 470PF K	
C287			CC73GCH1H090B	CHIP C 9.0PF B		C617			C92-0656-05	CHIP-TAN 2.2UF 6.3WV	
C288			CC73HCH1H050B	CHIP C 5.0PF B	K2,K4	C618			C92-0713-05	CHIP-TAN 10UF 6.3WV	
C289			CC73HCH1H040B	CHIP C 4.0PF B	K,K3	C619			CK73HB1H561K	CHIP C 560PF K	
C290			CK73HB0J224K	CHIP C 0.22UF K		C620			CK73HB1A104K	CHIP C 0.10UF K	
C292			CK73HB1C103K	CHIP C 0.010UF K		C621			CK73HB1C103K	CHIP C 0.010UF K	
C294			CC73GCH1H200J	CHIP C 20PF J	K,K3	C622			CK73HB1E562K	CHIP C 5600PF K	
C401,402			CK73HB1H471K	CHIP C 470PF K		C625			CK73HB1A104K	CHIP C 0.10UF K	
C404-414			CK73HB1H471K	CHIP C 470PF K		C627			CK73HB1C103K	CHIP C 0.010UF K	
C415			CK73FB1A475K	CHIP C 4.7UF K		C628			CK73HB1A104K	CHIP C 0.10UF K	
C416			CK73HB1H102K	CHIP C 1000PF K		C630			CK73HB1H271K	CHIP C 270PF K	
C418			CK73HB1H102K	CHIP C 1000PF K		C631			CK73HB1A104K	CHIP C 0.10UF K	
C419			CK73GB1E105K	CHIP C 1.0UF K		C632			CK73GB1E105K	CHIP C 1.0UF K	
C420			CK73GB1C104K	CHIP C 0.10UF K		C633			CK73HB1C103K	CHIP C 0.010UF K	
C421			CK73GB1A224K	CHIP C 0.22UF K		C635			CC73HCH1H101J	CHIP C 100PF J	
C422			CK73GB1E105K	CHIP C 1.0UF K		C636			CK73HB1A104K	CHIP C 0.10UF K	
C423			C92-0825-05	CHIP-TAN 10UF 10WV		C638			CK73HB1H102K	CHIP C 1000PF K	
C425			CK73GB1E105K	CHIP C 1.0UF K		C640,641			CK73GB0J475K	CHIP C 4.7UF K	
C426			CC73HCH1H101J	CHIP C 100PF J		C642		*	CK73HB1A473J	CHIP C 0.047UF J	
C427			CK73GB1E105K	CHIP C 1.0UF K		C644			CK73HB1C123K	CHIP C 0.012UF K	
C428			CK73HB1H471K	CHIP C 470PF K		C645			CK73HB1A104K	CHIP C 0.10UF K	
C429			CK73GB1E105K	CHIP C 1.0UF K		C646			CK73GB0J475K	CHIP C 4.7UF K	
C431			CK73HB1H471K	CHIP C 470PF K		C647			CK73HB1C123K	CHIP C 0.012UF K	
C432			C92-0825-05	CHIP-TAN 10UF 10WV		C648			CK73HB1H102K	CHIP C 1000PF K	
C433			CK73HB1H471K	CHIP C 470PF K		C650,651			CK73HB1A104K	CHIP C 0.10UF K	
C434			CC73HCH1H101J	CHIP C 100PF J		C652			CC73HCH1H680J	CHIP C 68PF J	
C435			CK73GB1A224K	CHIP C 0.22UF K		C653-655			CK73HB1A104K	CHIP C 0.10UF K	
C436			CK73GB1H103K	CHIP C 0.010UF K		C656			CK73HB0J224K	CHIP C 0.22UF K	
C437			CC73HCH1H101J	CHIP C 100PF J		C657			CC73HCH1H330J	CHIP C 33PF J	
C441			CK73GB1E105K	CHIP C 1.0UF K		C658			CK73HB1A104K	CHIP C 0.10UF K	
C442			CK73GB1A224K	CHIP C 0.22UF K		C659,660			CK73GB1C104K	CHIP C 0.10UF K	
C443			CK73GB1E105K	CHIP C 1.0UF K		C661			CK73HB1A104K	CHIP C 0.10UF K	
C445			CC73HCH1H470J	CHIP C 47PF J		C662			CK73HB1H102K	CHIP C 1000PF K	
C446			CK73HB1H471K	CHIP C 470PF K		C663			CK73HB0J105K	CHIP C 1.0UF K	
C447			CK73HB1E472K	CHIP C 4700PF K		C665			CK73GB1E223K	CHIP C 0.022UF K	
C450,451			CK73GB0J475K	CHIP C 4.7UF K		C666			CK73HB1A104K	CHIP C 0.10UF K	
C500			C92-0712-05	CHIP-TAN 22UF 6.3WV		C667			CC73HCH1H470J	CHIP C 47PF J	
C502			C92-0712-05	CHIP-TAN 22UF 6.3WV		C668			CC73HCH1H220J	CHIP C 22PF J	
C503			CK73GB1E105K	CHIP C 1.0UF K		C669			CK73HB1H102K	CHIP C 1000PF K	
C505-508			CK73GB1E105K	CHIP C 1.0UF K		C670			CK73HB1A104K	CHIP C 0.10UF K	
C509			CC73HCH1H270J	CHIP C 27PF J		C672			CK73HB1H102K	CHIP C 1000PF K	
C510			CC73HCH1H040C	CHIP C 4.0PF C		C673-675			CK73HB1A104K	CHIP C 0.10UF K	
C511			CC73HCH1H270J	CHIP C 27PF J		C676			CC73HCH1H470J	CHIP C 47PF J	
C512			CK73HB1C103K	CHIP C 0.010UF K		C677			CK73HB1H222K	CHIP C 2200PF K	
C514			CK73HB1C103K	CHIP C 0.010UF K		C678			CK73GB1C104K	CHIP C 0.10UF K	
C515			CC73HCH1H150G	CHIP C 15PF G		C679,680			CK73HB1A104K	CHIP C 0.10UF K	
C516			CK73HB1C103K	CHIP C 0.010UF K		C681			CK73HB1H102K	CHIP C 1000PF K	
C517			CK73HB1A104K	CHIP C 0.10UF K		C682			CK73HB1C153K	CHIP C 0.015UF K	
C518			CK73HB0J105K	CHIP C 1.0UF K		C683			CK73HB1C123K	CHIP C 0.012UF K	
C600			CK73HB1A104K	CHIP C 0.10UF K		C684			CK73HB1H102K	CHIP C 1000PF K	
C601			CC73HCH1H220J	CHIP C 22PF J		C685			CK73HB1A104K	CHIP C 0.10UF K	
C602			CK73HB1A104K	CHIP C 0.10UF K		C686			CK73HB1A683K	CHIP C 0.068UF K	
C603			CK73HB1E472K	CHIP C 4700PF K		C687			C92-0713-05	CHIP-TAN 10UF 6.3WV	
C604,605			CC73HCH1H680J	CHIP C 68PF J		C688			CK73GB1A474K	CHIP C 0.47UF K	

PARTS LIST

TX-RX UNIT (X57-6940-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
C689			CK73HB1C103K	CHIP C 0.010UF K		L9			L92-0138-05	CHIP FERRITE	
C690			CC73HCH1H470J	CHIP C 47PF J		L10			L40-1891-86	SMALL FIXED INDUCTOR (1.8UH)	K,K3
C691			CK73GB1A474K	CHIP C 0.47UF K		L10			L40-2702-86	SMALL FIXED INDUCTOR (27UH)	K2,K4
C692			CC73HCH1H470J	CHIP C 47PF J		L11			L40-3391-86	SMALL FIXED INDUCTOR (3.3UH)	
C693			CK73GB1A474K	CHIP C 0.47UF K		L12			L92-0163-05	BEADS CORE	
C694			CK73HB1H152K	CHIP C 1500PF K		L13			L40-1891-86	SMALL FIXED INDUCTOR (1.8UH)	K,K3
C695			CK73HB1A104K	CHIP C 0.10UF K		L13			L40-2702-86	SMALL FIXED INDUCTOR (27UH)	K2,K4
C696			CK73HB1C103K	CHIP C 0.010UF K		L14			L40-3391-86	SMALL FIXED INDUCTOR (3.3UH)	
C697,698			CK73HB1A104K	CHIP C 0.10UF K		L17			L40-1578-67	SMALL FIXED INDUCTOR (15NH)	K,K3
C699			C92-0816-05	CHIP-TAN 10UF 16WV		L17			L40-1878-67	SMALL FIXED INDUCTOR (18NH)	K2,K4
C700			CC73HCH1H470J	CHIP C 47PF J		L18			L40-2278-67	SMALL FIXED INDUCTOR (22NH)	K,K3
C702-710			CC73HCH1H470J	CHIP C 47PF J		L18			L40-2778-67	SMALL FIXED INDUCTOR (27NH)	K2,K4
C711-714			CK73HB1H102K	CHIP C 1000PF K		L19,20			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	K,K3
C715-717			CK73HB1A104K	CHIP C 0.10UF K		L20			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	K2,K4
C718			CC73HCH1H180J	CHIP C 18PF J		L21,22			L40-3391-86	SMALL FIXED INDUCTOR (3.3UH)	
C719			CC73HCH1H220J	CHIP C 22PF J		L23			L92-0163-05	BEADS CORE	
C720			CK73HB1H471K	CHIP C 470PF K		L24,25			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	
C721			CK73HB1H102K	CHIP C 1000PF K		L27			L40-1075-92	SMALL FIXED INDUCTOR (10NH)	
C725			CK73HB1H392K	CHIP C 3900PF K		L30			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	K2,K4
C727			CK73HB1A104K	CHIP C 0.10UF K		L100			L40-3375-92	SMALL FIXED INDUCTOR (33NH)	K2,K4
C728			CK73HB0J105K	CHIP C 1.0UF K		L100,101			L40-1875-92	SMALL FIXED INDUCTOR (18NH)	K,K3
C729			CK73HB1H271K	CHIP C 270PF K		L101			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	K2,K4
C730			CK73HB1H332K	CHIP C 3300PF K		L102			L92-0138-05	CHIP FERRITE	
C732			CK73HB1H471K	CHIP C 470PF K		L103			L40-1275-92	SMALL FIXED INDUCTOR (12NH)	K,K3
C734			CC73HCH1H220J	CHIP C 22PF J		L103			L40-1575-92	SMALL FIXED INDUCTOR (15NH)	K2,K4
C736			CC73HCH1H470J	CHIP C 47PF J		L104			L40-1575-54	SMALL FIXED INDUCTOR (15NH)	K,K3
C737			CK73GB0J475K	CHIP C 4.7UF K		L104			L40-1875-54	SMALL FIXED INDUCTOR (18NH)	K2,K4
C738			CK73HB1H331K	CHIP C 330PF K		L105			L92-0149-05	CHIP FERRITE	
C739-751			CC73HCH1H470J	CHIP C 47PF J		L106			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	
C752,753			CC73HCH1H050B	CHIP C 5.0PF B		L107			L34-4566-05	AIR-CORE COIL	
C754			CK73HB1A104K	CHIP C 0.10UF K		L108			L92-0149-05	CHIP FERRITE	
C755			CK73HB1E472K	CHIP C 4700PF K		L109			L40-2285-54	SMALL FIXED INDUCTOR (220NH)	
C756			CK73HB1A104K	CHIP C 0.10UF K		L110			L34-4572-05	AIR-CORE COIL	
C757			CK73HB1E472K	CHIP C 4700PF K		L111-113			L34-4564-05	AIR-CORE COIL	
C759			CK73HB1C123K	CHIP C 0.012UF K		L115			L41-8669-16	SMALL FIXED INDUCTOR	K2,K4
C763			CK73HB1H471K	CHIP C 470PF K		L200			L92-0141-05	CHIP FERRITE	
TC1,2			C05-0384-05	CERAMIC TRIMMER CAPACITOR (10PF)		L201			L40-1091-86	SMALL FIXED INDUCTOR (1.0UH)	
CN400			E40-5823-05	FLAT CABLE CONNECTOR		L202			L40-1591-86	SMALL FIXED INDUCTOR (1.5UH)	
CN500			E40-6413-05	FLAT CABLE CONNECTOR		L203			L92-0138-05	CHIP FERRITE	
CN502,503			E23-0342-05	TEST TERMINAL		L204			L40-2785-85	SMALL FIXED INDUCTOR (0.27UH)	
CN600			E40-6389-05	PIN ASSY		L206,207			L40-1575-92	SMALL FIXED INDUCTOR (15NH)	K2,K4
CN602			E40-5856-05	FLAT CABLE CONNECTOR		L206,207			L40-1875-92	SMALL FIXED INDUCTOR (18NH)	K,K3
CN603			E23-1263-05	TERMINAL		L208			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	K,K3
F400			F53-0190-05	FUSE		L208			L40-3375-92	SMALL FIXED INDUCTOR (33NH)	K2,K4
F601,602			F53-0315-05	FUSE		L210-212			L41-1078-14	SMALL FIXED INDUCTOR	K2,K4
CN501			J19-5386-05	HOLDER		L210-212			L41-8268-14	SMALL FIXED INDUCTOR	K,K3
CD200			L79-1072-05	TUNING COIL		L213			L92-0138-05	CHIP FERRITE	
CF200			L72-1013-05	CERAMIC FILTER		L214			L41-2285-03	SMALL FIXED INDUCTOR	
CF201			L72-1014-05	CERAMIC FILTER		L215,216			L41-1078-14	SMALL FIXED INDUCTOR	K2,K4
L1			L40-4795-85	SMALL FIXED INDUCTOR (4.7UH)		L215,216			L41-8268-14	SMALL FIXED INDUCTOR	K,K3
L2		*	L41-1867-31	SMALL FIXED INDUCTOR	K2,K4	L217			L41-3378-03	SMALL FIXED INDUCTOR	K,K3
L2			L41-2767-31	SMALL FIXED INDUCTOR	K,K3	L217			L41-3978-03	SMALL FIXED INDUCTOR	K2,K4
L3			L41-3367-31	SMALL FIXED INDUCTOR		L218			L40-8265-92	SMALL FIXED INDUCTOR (8.2NH)	
L4			L41-1878-31	SMALL FIXED INDUCTOR		L220			L40-5685-85	SMALL FIXED INDUCTOR (0.56UH)	
L6			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	K2,K4	L400			L92-0149-05	CHIP FERRITE	
L6			L41-1878-31	SMALL FIXED INDUCTOR	K,K3	L500-503			L92-0163-05	BEADS CORE	
L8			L40-1075-92	SMALL FIXED INDUCTOR (10NH)		L600			L92-0163-05	BEADS CORE	
						L601			L92-0419-15	CHIP FERRITE	
						L602-607			L92-0163-05	BEADS CORE	
						L608,609			L92-0467-05	CHIP FERRITE	

PARTS LIST

TX-RX UNIT (X57-6940-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
L610,611			L92-0408-05	CHIP FERRITE		R53			R92-1368-05	CHIP R 0 OHM	
L612			L92-0163-05	BEADS CORE		R100			RK73HB1J333D	CHIP R 33K D 1/16W	
L615			L92-0163-05	BEADS CORE		R101			RK73HB1J472J	CHIP R 4.7K J 1/16W	
X1			L77-1952-05	TCXO (16.8MHZ)		R102			RK73HB1J223J	CHIP R 22K J 1/16W	
X200			L77-1957-05	CRYSTAL RESONATOR (59.395MHZ)		R103			RK73HB1J822J	CHIP R 8.2K J 1/16W	
X500			L77-1958-05	CRYSTAL RESONATOR (11.0592MHZ)		R104			RK73HB1J473J	CHIP R 47K J 1/16W	
X501			L77-1802-05	CRYSTAL RESONATOR (32768HZ)		R105			RK73HB1J100J	CHIP R 10 J 1/16W	
X600			L77-1965-05	CRYSTAL RESONATOR (3.6864MHZ)		R106			RK73HB1J331J	CHIP R 330 J 1/16W	
XF200			L71-0622-05	MCF (59.85MHZ)		R107			RK73HB1J220J	CHIP R 22 J 1/16W	
						R108			RK73HB1J331J	CHIP R 330 J 1/16W	
CP400,401			RK75HA1J473J	CHIP-COM 47K J 1/16W		R109			RK73HB1J180J	CHIP R 18 J 1/16W	
CP500-510			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R110			RK73HB1J331J	CHIP R 330 J 1/16W	
CP511			RK75HA1J331J	CHIP-COM 330 J 1/16W		R111			RK73HB1J101J	CHIP R 100 J 1/16W	
CP512-515			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R112			RK73HB1J103J	CHIP R 10K J 1/16W	
CP516			RK75HA1J103J	CHIP-COM 10K J 1/16W		R113			RK73HB1J822J	CHIP R 8.2K J 1/16W	
CP517			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R115			RK73HB1J331J	CHIP R 330 J 1/16W	
CP518			RK75HA1J473J	CHIP-COM 47K J 1/16W		R116			RK73HB1J103J	CHIP R 10K J 1/16W	
CP519			RK75HA1J103J	CHIP-COM 10K J 1/16W		R117			RK73HB1J473J	CHIP R 47K J 1/16W	
CP521			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R119			RK73HB1J470J	CHIP R 47 J 1/16W	
CP522			RK75HA1J101J	CHIP-COM 100 J 1/16W		R120			R92-1368-05	CHIP R 0 OHM	
CP600			RK75HA1J473J	CHIP-COM 47K J 1/16W		R122			RK73HB1J271J	CHIP R 270 J 1/16W	
CP601-603			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R123			RK73HB1J561J	CHIP R 560 J 1/16W	
CP604,605			RK75HA1J331J	CHIP-COM 330 J 1/16W		R124			R92-1368-05	CHIP R 0 OHM	
CP606			RK75HA1J102J	CHIP-COM 1.0K J 1/16W		R125			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
CP607,608			RK75HA1J101J	CHIP-COM 100 J 1/16W		R126			RK73HB1J470J	CHIP R 47 J 1/16W	
R2			RK73HB1J101J	CHIP R 100 J 1/16W		R127			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
R3			R92-1368-05	CHIP R 0 OHM		R128			RK73HH1J104D	CHIP R 100K D 1/16W	
R4			RK73HB1J100J	CHIP R 10 J 1/16W		R130			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
R5			RK73HB1J103J	CHIP R 10K J 1/16W		R132,133			RK73HH1J154D	CHIP R 150K D 1/16W	
R6,7			RK73HB1J223J	CHIP R 22K J 1/16W		R134			R92-1368-05	CHIP R 0 OHM	
R8-10			RK73HB1J100J	CHIP R 10 J 1/16W		R135			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R11			RK73HB1J102J	CHIP R 1.0K J 1/16W		R137-140			RK73HH1J154D	CHIP R 150K D 1/16W	
R12			RK73HB1J272J	CHIP R 2.7K J 1/16W		R141			RK73HB1J103J	CHIP R 10K J 1/16W	
R13			RK73HB1J154J	CHIP R 150K J 1/16W		R142			RK73HB1J473J	CHIP R 47K J 1/16W	
R14,15			RK73HB1J100J	CHIP R 10 J 1/16W		R143			R92-1368-05	CHIP R 0 OHM	
R16			RK73HB1J821J	CHIP R 820 J 1/16W		R144			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R17,18			RK73HB1J271J	CHIP R 270 J 1/16W		R145			RK73HB1J102J	CHIP R 1.0K J 1/16W	K,K3
R19,20			RK73HB1J223J	CHIP R 22K J 1/16W		R146			RK73HB1J222J	CHIP R 2.2K J 1/16W	K2,K4
R21			RK73HB1J681J	CHIP R 680 J 1/16W		R145,147			RK73HB1J104J	CHIP R 100K J 1/16W	
R22			RK73HB1J103J	CHIP R 10K J 1/16W		R148,149			RK73HB1J271J	CHIP R 270 J 1/16W	
R23,24			RK73HB1J472J	CHIP R 4.7K J 1/16W		R150			R92-0670-05	CHIP R 0 OHM	K,K3
R29			RK73HB1J184J	CHIP R 180K J 1/16W		R152			R92-1368-05	CHIP R 0 OHM	
R30,31			RK73HB1J473J	CHIP R 47K J 1/16W		R153			RK73HB1J393J	CHIP R 39K J 1/16W	
R32			RK73HB1J100J	CHIP R 10 J 1/16W		R154			R92-1368-05	CHIP R 0 OHM	
R33			RK73HB1J181J	CHIP R 180 J 1/16W		R155			RK73EB2E823J	CHIP R 82K J 1/4W	
R34			RK73HB1J151J	CHIP R 150 J 1/16W		R157,158			R92-1368-05	CHIP R 0 OHM	
R35			RK73HB1J100J	CHIP R 10 J 1/16W		R200			RK73HB1J824J	CHIP R 820K J 1/16W	
R36			RK73HB1J154J	CHIP R 150K J 1/16W		R202			RK73HB1J224J	CHIP R 220K J 1/16W	
R37			RK73HB1J472J	CHIP R 4.7K J 1/16W		R203			RK73HB1J683J	CHIP R 68K J 1/16W	
R38			RK73HB1J101J	CHIP R 100 J 1/16W		R204			RK73HB1J104J	CHIP R 100K J 1/16W	
R39			RK73HB1J472J	CHIP R 4.7K J 1/16W		R205			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R40			RK73HB1J682J	CHIP R 6.8K J 1/16W		R206			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R41			RK73HB1J103J	CHIP R 10K J 1/16W		R207			R92-1368-05	CHIP R 0 OHM	
R42			RK73HB1J331J	CHIP R 330 J 1/16W		R208,209			RK73HB1J223J	CHIP R 22K J 1/16W	
R43			RK73HB1J222J	CHIP R 2.2K J 1/16W		R210			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R44			RK73HB1J470J	CHIP R 47 J 1/16W		R211,212			RK73HB1J223J	CHIP R 22K J 1/16W	
R45			R92-1368-05	CHIP R 0 OHM		R213			RK73HB1J471J	CHIP R 470 J 1/16W	
R46			RK73HB1J472J	CHIP R 4.7K J 1/16W		R214			RK73HB1J334J	CHIP R 330K J 1/16W	
R47			RK73HB1J474J	CHIP R 470K J 1/16W		R215			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R51			R92-1368-05	CHIP R 0 OHM		R216			RK73HB1J392J	CHIP R 3.9K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6940-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
R217			RK73HB1J184J	CHIP R 180K J 1/16W		R511			R92-1368-05	CHIP R 0 OHM	
R218			RK73HB1J822J	CHIP R 8.2K J 1/16W		R512			RK73HB1J473J	CHIP R 47K J 1/16W	
R219			RK73GB1J153J	CHIP R 15K J 1/16W		R513			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R220			RK73HB1J334J	CHIP R 330K J 1/16W		R514			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R221			RK73GB1J332J	CHIP R 3.3K J 1/16W		R515			RK73HB1J473J	CHIP R 47K J 1/16W	
R222			RK73HB1J272J	CHIP R 2.7K J 1/16W		R516,517			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R223			RK73HB1J474J	CHIP R 470K J 1/16W		R518			RK73HB1J103J	CHIP R 10K J 1/16W	
R224			RK73HB1J392J	CHIP R 3.9K J 1/16W		R519			RK73HB1J474J	CHIP R 470K J 1/16W	
R225			RK73HB1J100J	CHIP R 10 J 1/16W		R520			RK73HB1J103J	CHIP R 10K J 1/16W	
R226			RK73HB1J562J	CHIP R 5.6K J 1/16W		R521			RK73HH1J272D	CHIP R 2.7K D 1/16W	
R227			R92-1368-05	CHIP R 0 OHM		R522			RK73HH1J512D	CHIP R 5.1K D 1/16W	
R228			RK73HB1J221J	CHIP R 220 J 1/16W		R523,524			R92-1368-05	CHIP R 0 OHM	
R230			RK73HB1J564J	CHIP R 560K J 1/16W		R525			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R231			RK73HB1J121J	CHIP R 120 J 1/16W		R526			R92-1252-05	CHIP R 0 OHM J 1/16W	
R232			RK73HB1J221J	CHIP R 220 J 1/16W		R527			RK73HB1J473J	CHIP R 47K J 1/16W	
R233			RK73HB1J472J	CHIP R 4.7K J 1/16W		R528			RK73HB1J474J	CHIP R 470K J 1/16W	
R234			RK73HB1J470J	CHIP R 47 J 1/16W		R600			RK73HB1J684J	CHIP R 680K J 1/16W	
R236			RK73HB1J681J	CHIP R 680 J 1/16W		R601			RK73HB1J394J	CHIP R 390K J 1/16W	
R237			RK73HB1J151J	CHIP R 150 J 1/16W		R603			R92-1368-05	CHIP R 0 OHM	
R239			RK73HB1J104J	CHIP R 100K J 1/16W		R604			RK73HB1J184J	CHIP R 180K J 1/16W	
R240			RK73HB1J154J	CHIP R 150K J 1/16W		R605			RK73HB1J393J	CHIP R 39K J 1/16W	
R241			RK73HB1J104J	CHIP R 100K J 1/16W		R606			RK73HB1J184J	CHIP R 180K J 1/16W	
R242			RK73HB1J184J	CHIP R 180K J 1/16W		R607			RK73HB1J223J	CHIP R 22K J 1/16W	
R243			R92-1252-05	CHIP R 0 OHM J 1/16W		R609			RK73HB1J104J	CHIP R 100K J 1/16W	
R244-246			RK73HB1J105J	CHIP R 1.0M J 1/16W		R612			RK73HB1J103J	CHIP R 10K J 1/16W	
R248			RK73HB1J680J	CHIP R 68 J 1/16W		R613			RK73HB1J104J	CHIP R 100K J 1/16W	
R249			RK73HB1J221J	CHIP R 220 J 1/16W		R614			RK73HB1J683J	CHIP R 68K J 1/16W	
R251			RK73HB1J104J	CHIP R 100K J 1/16W		R615			RK73HB1J473J	CHIP R 47K J 1/16W	
R253			RK73HB1J104J	CHIP R 100K J 1/16W		R616			RK73HB1J104J	CHIP R 100K J 1/16W	
R254			RK73HB1J683J	CHIP R 68K J 1/16W		R617			RK73HB1J683J	CHIP R 68K J 1/16W	
R255			RK73HB1J104J	CHIP R 100K J 1/16W		R618			R92-1368-05	CHIP R 0 OHM	
R256-258			RK73HB1J105J	CHIP R 1.0M J 1/16W		R619			RK73HB1J184J	CHIP R 180K J 1/16W	
R259			R92-1252-05	CHIP R 0 OHM J 1/16W	K2,K4	R623			RK73HB1J104J	CHIP R 100K J 1/16W	
R400			R92-1368-05	CHIP R 0 OHM		R624			R92-1368-05	CHIP R 0 OHM	
R402			RK73HB1J821J	CHIP R 820 J 1/16W		R625			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R403			RK73HB1J561J	CHIP R 560 J 1/16W		R626			RK73HB1J184J	CHIP R 180K J 1/16W	
R404			RK73HB1J103J	CHIP R 10K J 1/16W		R627			RK73HB1J684J	CHIP R 680K J 1/16W	
R405			RK73HB1J104J	CHIP R 100K J 1/16W		R628,629			R92-1368-05	CHIP R 0 OHM	
R406			RK73HB1J224J	CHIP R 220K J 1/16W		R631			RK73HB1J474J	CHIP R 470K J 1/16W	
R407			RK73HB1J684J	CHIP R 680K J 1/16W		R633			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R408,409			RK73HB1J474J	CHIP R 470K J 1/16W		R635,636			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R410			RK73HB1J103J	CHIP R 10K J 1/16W		R637			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R411,412			RK73HH1J474D	CHIP R 470K D 1/16W		R638			RK73HB1J103J	CHIP R 10K J 1/16W	
R414			RK73HB1J103J	CHIP R 10K J 1/16W		R641			RK73HB1J273J	CHIP R 27K J 1/16W	
R415			RK73HB1J153J	CHIP R 15K J 1/16W		R642			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R416			R92-1368-05	CHIP R 0 OHM		R643			RK73HB1J104J	CHIP R 100K J 1/16W	
R417			RK73HB1J684J	CHIP R 680K J 1/16W		R644			RK73HB1J103J	CHIP R 10K J 1/16W	
R418			RK73HB1J474J	CHIP R 470K J 1/16W		R645			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R419			RK73HB1J105J	CHIP R 1.0M J 1/16W		R648			RK73HB1J104J	CHIP R 100K J 1/16W	
R421			RK73HB1J102J	CHIP R 1.0K J 1/16W		R650			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R422			RK73HB1J472J	CHIP R 4.7K J 1/16W		R652			RK73HB1J103J	CHIP R 10K J 1/16W	
R423,424			RK73HB1J103J	CHIP R 10K J 1/16W		R654			RK73HB1J683J	CHIP R 68K J 1/16W	
R425-427			RK73HB1J473J	CHIP R 47K J 1/16W		R655			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R428			RK73HB1J124J	CHIP R 120K J 1/16W		R656			RK73HB1J563J	CHIP R 56K J 1/16W	
R430			RK73HB1J103J	CHIP R 10K J 1/16W		R657			RK73HB1J564J	CHIP R 560K J 1/16W	
R500			R92-1368-05	CHIP R 0 OHM		R658			RK73HB1J473J	CHIP R 47K J 1/16W	
R504			R92-1368-05	CHIP R 0 OHM		R659			R92-1252-05	CHIP R 0 OHM J 1/16W	
R505,506			RK73HB1J473J	CHIP R 47K J 1/16W		R660			R92-1368-05	CHIP R 0 OHM	
R507			RK73HB1J474J	CHIP R 470K J 1/16W		R661			RK73HB1J334J	CHIP R 330K J 1/16W	
R508-510			RK73HB1J473J	CHIP R 47K J 1/16W		R663			RK73HB1J103J	CHIP R 10K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6940-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R664			RK73HB1J124J	CHIP R 120K J 1/16W		R744			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R666			RK73HB1J105J	CHIP R 1.0M J 1/16W		R745			RK73HB1J823J	CHIP R 82K J 1/16W	
R667			RK73HB1J394J	CHIP R 390K J 1/16W		R747			R92-1368-05	CHIP R 0 OHM	
R668			RK73HB1J154J	CHIP R 150K J 1/16W		R748			RK73HB1J104J	CHIP R 100K J 1/16W	
R669			RK73HB1J124J	CHIP R 120K J 1/16W		R750			RK73HB1J823J	CHIP R 82K J 1/16W	
R670			R92-1252-05	CHIP R 0 OHM J 1/16W		R752			R92-1368-05	CHIP R 0 OHM	
R671			RK73HB1J104J	CHIP R 100K J 1/16W		R753			RK73HB1J103J	CHIP R 10K J 1/16W	
R672			RK73HB1J224J	CHIP R 220K J 1/16W		R754			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R673,674			R92-1368-05	CHIP R 0 OHM		R755			R92-1252-05	CHIP R 0 OHM J 1/16W	
R675			RK73HB1J105J	CHIP R 1.0M J 1/16W		R758			RK73HB1J473J	CHIP R 47K J 1/16W	
R676			RK73HB1J274J	CHIP R 270K J 1/16W		R760			RK73HB1J104J	CHIP R 100K J 1/16W	
R677			RK73HB1J223J	CHIP R 22K J 1/16W		R761			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R679			R92-1368-05	CHIP R 0 OHM		R762			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R680			RK73HB1J274J	CHIP R 270K J 1/16W		R764,765			R92-1252-05	CHIP R 0 OHM J 1/16W	
R681			RK73HB1J102J	CHIP R 1.0K J 1/16W		R766			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R682			RK73HB1J272J	CHIP R 2.7K J 1/16W		R767			RK73HB1J474J	CHIP R 470K J 1/16W	
R683			RK73HB1J154J	CHIP R 150K J 1/16W		R768			RK73HB1J101J	CHIP R 100 J 1/16W	
R684			R92-1252-05	CHIP R 0 OHM J 1/16W		R769-771			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R685			RK73HB1J472J	CHIP R 4.7K J 1/16W		R772			R92-1368-05	CHIP R 0 OHM	
R686			RK73HB1J474D	CHIP R 470K D 1/16W		R773			RK73HB1J823J	CHIP R 82K J 1/16W	
R687			RK73HB1J105J	CHIP R 1.0M J 1/16W		R775			RK73HB1J563J	CHIP R 56K J 1/16W	
R688			RK73HB1J273J	CHIP R 27K J 1/16W		R776			RK73HB1J473J	CHIP R 47K J 1/16W	
R689,690			R92-1368-05	CHIP R 0 OHM		R777			RK73HB1J100J	CHIP R 10 J 1/16W	
R691			RK73HB1J103J	CHIP R 10K J 1/16W		R780			RK73HB1J103J	CHIP R 10K J 1/16W	
R692			RK73HB1J823J	CHIP R 82K J 1/16W		R781,782			R92-1368-05	CHIP R 0 OHM	
R693			RK73HB1J472J	CHIP R 4.7K J 1/16W		R783			RK73HB1J683J	CHIP R 68K J 1/16W	
R694			RK73HB1J104D	CHIP R 100K D 1/16W		R784			RK73HB1J473J	CHIP R 47K J 1/16W	
R695			RK73HB1J103J	CHIP R 10K J 1/16W		R785			RK73HB1J123D	CHIP R 12K D 1/16W	
R696			RK73HB1J184J	CHIP R 180K J 1/16W		R786	*		RK73HB1J562D	CHIP R 5.6K D 1/16W	
R697			RK73HB1J474J	CHIP R 470K J 1/16W		R787			RK73HB1J103D	CHIP R 10K D 1/16W	
R698			RK73HB1J105J	CHIP R 1.0M J 1/16W		R788			RK73HB1J473J	CHIP R 47K J 1/16W	
R699			RK73HB1J334J	CHIP R 330K J 1/16W		R790			R92-1368-05	CHIP R 0 OHM	
R700			RK73HB1J184J	CHIP R 180K J 1/16W		R792			RK73HB1J223J	CHIP R 22K J 1/16W	
R701			RK73HB1J223J	CHIP R 22K J 1/16W		R794			R92-1368-05	CHIP R 0 OHM	
R702,703			RK73HB1J473J	CHIP R 47K J 1/16W		R796			R92-1252-05	CHIP R 0 OHM J 1/16W	
R704			RK73HB1J471J	CHIP R 470 J 1/16W		S400			S70-0483-05	TACT SWITCH	
R705,706			RK73HB1J153J	CHIP R 15K J 1/16W		D1-4			HVC131	DIODE	
R707			RK73HB1J182J	CHIP R 1.8K J 1/16W		D6			1SV325	VARIABLE CAPACITANCE DIODE	K2,K4
R708			RK73HB1J102J	CHIP R 1.0K J 1/16W		D7			1SV325	VARIABLE CAPACITANCE DIODE	K,K3
R709			RK73HB1J104J	CHIP R 100K J 1/16W		D9			1SV325	VARIABLE CAPACITANCE DIODE	
R710			RK73HB1J102J	CHIP R 1.0K J 1/16W		D11			1SV325	VARIABLE CAPACITANCE DIODE	K,K3
R711			RK73HB1J473J	CHIP R 47K J 1/16W		D11,12			1SV325	VARIABLE CAPACITANCE DIODE	K2,K4
R712			RK73HB1J104J	CHIP R 100K J 1/16W		D13			1SV325	VARIABLE CAPACITANCE DIODE	K,K3
R713			RK73HB1J102J	CHIP R 1.0K J 1/16W		D17			1SV278	VARIABLE CAPACITANCE DIODE	
R714			RK73HB1J104J	CHIP R 100K J 1/16W		D18			MA2S111	DIODE	
R715			RK73HB1J272J	CHIP R 2.7K J 1/16W		D100			HSC277	DIODE	
R716			RK73HB1J104J	CHIP R 100K J 1/16W		D103		*	HZU3BLL	ZENER DIODE	
R717-720			RK73HB1J101J	CHIP R 100 J 1/16W		D106,107			HVC131	DIODE	
R721			RK73HB1J103J	CHIP R 10K J 1/16W		D108			HZU2ALL	ZENER DIODE	
R722			RK73HB1J474J	CHIP R 470K J 1/16W		D200			MA2S111	DIODE	
R723			RK73HB1J470J	CHIP R 47 J 1/16W		D201			DAN222	DIODE	
R724			RK73HB1J102J	CHIP R 1.0K J 1/16W		D202			RB706F-40	DIODE	
R725,726			RK73HB1J331J	CHIP R 330 J 1/16W		D203			DAN222	DIODE	
R728-734			RK73HB1J102J	CHIP R 1.0K J 1/16W		D204			MA2S111	DIODE	
R735			RK73HB1J473J	CHIP R 47K J 1/16W		D205			HSC277	DIODE	
R736,737			RK73HB1J472J	CHIP R 4.7K J 1/16W		D206-210			HVC369B	VARIABLE CAPACITANCE DIODE	
R738			RK73HB1J124J	CHIP R 120K J 1/16W		D212			HVC369B	VARIABLE CAPACITANCE DIODE	
R739			RK73HB1J184J	CHIP R 180K J 1/16W		D213,214			HVC131	DIODE	
R740,741			RK73HB1J123J	CHIP R 12K J 1/16W		D314			MA2S111	DIODE	
R742			RK73HB1J822J	CHIP R 8.2K J 1/16W							


PARTS LIST

TX-RX UNIT (X57-6940-XX)


Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
D402			1SR154-400	DIODE		Q206,207			3SK318	FET	
D403			1SS301	DIODE		Q400			UMG9N	TRANSISTOR	
D404			MA2S111	DIODE		Q401			SSM3K15TE	FET	
D405			RB521S-30	DIODE		Q402			2SK1830	FET	
D406			MA2S111	DIODE		Q403			2SA1955(A)	TRANSISTOR	
D408			MA2S111	DIODE		Q404			DTC144EE	DIGITAL TRANSISTOR	
D500			MA2S111	DIODE		Q405			2SJ347	FET	
D501,502			1SS388	DIODE		Q406			2SA1955(A)	TRANSISTOR	
D600-603			RB706F-40	DIODE		Q407			2SK1830	FET	
D604			015AZ6.8	ZENER DIODE		Q408			2SA1955(A)	TRANSISTOR	
D605			1SS373	DIODE		Q409			2SJ347	FET	
D606			015AZ6.8	ZENER DIODE		Q502			SSM3K15TE	FET	
D607			015AZ2.4-X	ZENER DIODE		Q602			DTA114EE	DIGITAL TRANSISTOR	
D608			015AZ6.8	ZENER DIODE		Q605			RN4910	TRANSISTOR	
D609,610			DA221	DIODE		Q606			2SC4738(GR)	TRANSISTOR	
D611			NNCD6.8G	ZENER DIODE		Q607			2SA1832(GR)	TRANSISTOR	
D612			015AZ6.8	ZENER DIODE		Q608-610			2SJ243	FET	
D613			DA221	DIODE		Q611			HN1L02FU	FET	
D614			DAN222	DIODE		Q612			2SC4617(S)	TRANSISTOR	
IC1			ADF4111BCP7	MOS-IC		Q613			2SB1132(Q,R)	TRANSISTOR	
IC100			TA75W01FU	MOS-IC		Q614			2SJ347	FET	
IC200			TA31136FN	MOS-IC		Q615			2SC4617(S)	TRANSISTOR	
IC400			XC61CC5602NR	MOS-IC		Q616,617			UPA672T	FET	
IC401			TK11250CUCB	MOS-IC		Q618			2SK1824	FET	
IC402,403			XC6204B502MR	MOS-IC		Q619			2SJ243	FET	
IC404			TC75S51FE	MOS-IC		Q620			DTA144TE	DIGITAL TRANSISTOR	
IC405			S-80942CNNBG9C	MOS-IC		Q621			2SC4649(N,P)	TRANSISTOR	
IC406			TK11250CUCB	MOS-IC		Q622			FMMT717	TRANSISTOR	
IC500			AT29C040A-90TI	ROM IC		Q623,624			2SK1830	FET	
IC502			30625MGP-169GP	MICROPROCESSOR IC		TH100			ERTJ0EV104H	THERMISTOR	
IC503			RV5C386A	MOS-IC		TH200			ERTJ0EV104H	THERMISTOR	
IC504			AT24256N10SI27	ROM IC							
IC505			TC7W53FK	HYBRID IC							
IC600-604			TC75W51FK	MOS-IC							
IC605			M62364FP	MOS-IC							
IC606			TC7W53FK	HYBRID IC							
IC607			AQUA-L	MOS-IC							
IC608			TC75W51FK	MOS-IC							
IC609			TDA7053AT	BI-POLAR IC							
Q1			DTA144EE	DIGITAL TRANSISTOR							
Q2			DTC144EE	DIGITAL TRANSISTOR							
Q6,7			2SK508NV(K52)	FET							
Q8,9				FET							
Q10			2SC5108(Y)	TRANSISTOR							
Q11			2SK1830	FET							
Q12			2SC4617(S)	TRANSISTOR							
Q13-15			2SC5108(Y)	TRANSISTOR							
Q100			2SC5108(Y)	TRANSISTOR							
Q101			2SK3077	FET							
Q102			2SK3391	FET							
Q104			2SC4738(GR)	TRANSISTOR							
Q105			RD07MVS1	FET							
Q106			DTC114EE	DIGITAL TRANSISTOR							
Q107,108			2SK1824	FET							
Q200			HN1L02FU	FET							
Q201			2SC4617(S)	TRANSISTOR							
Q202			2SJ243	FET							
Q203			2SK1824	FET							
Q204			DTA144EE	DIGITAL TRANSISTOR							
Q205			2SC5108(Y)	TRANSISTOR							

TK-3180

EXPLODED VIEW

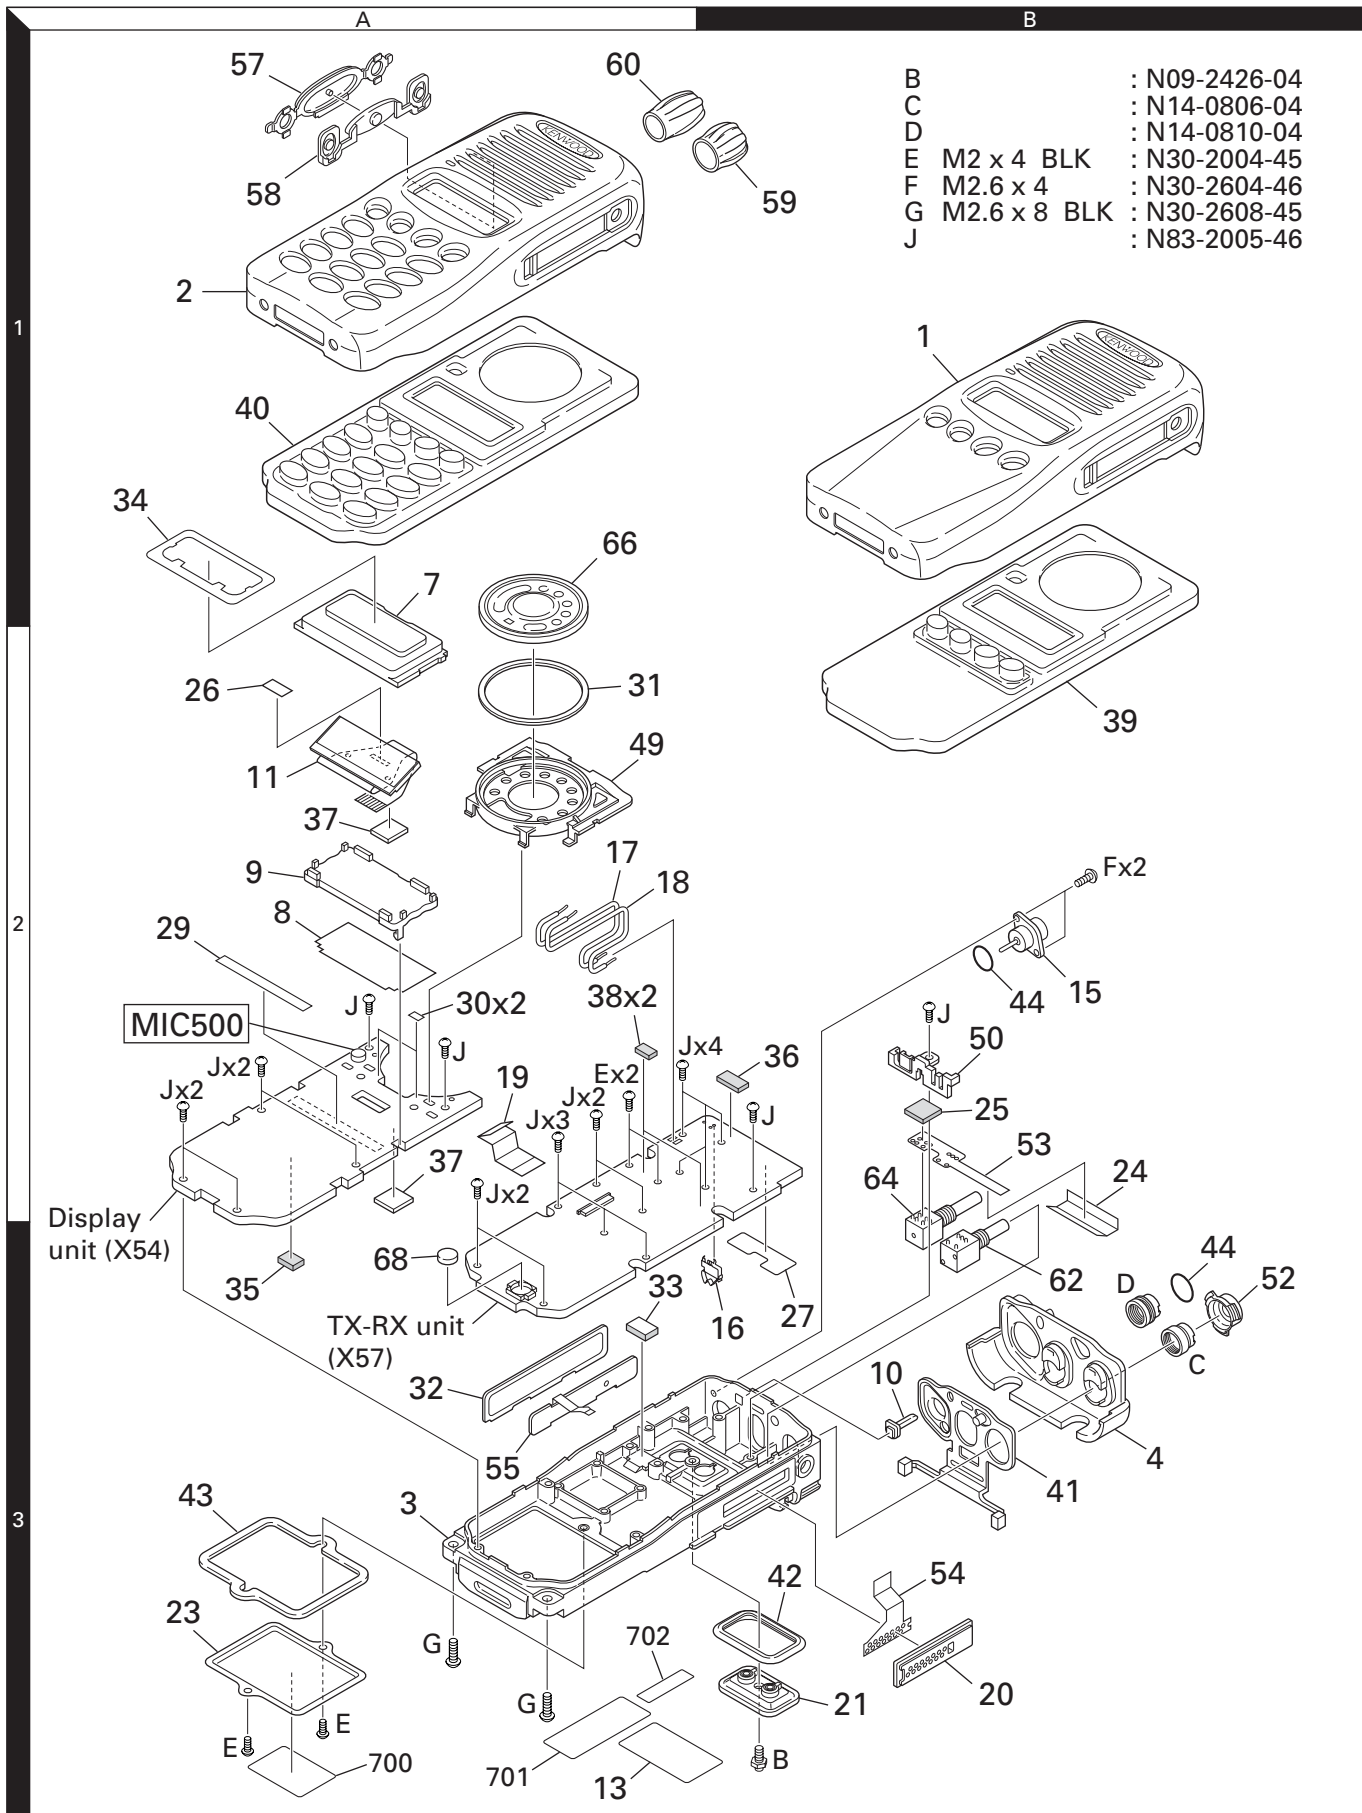


PACKING

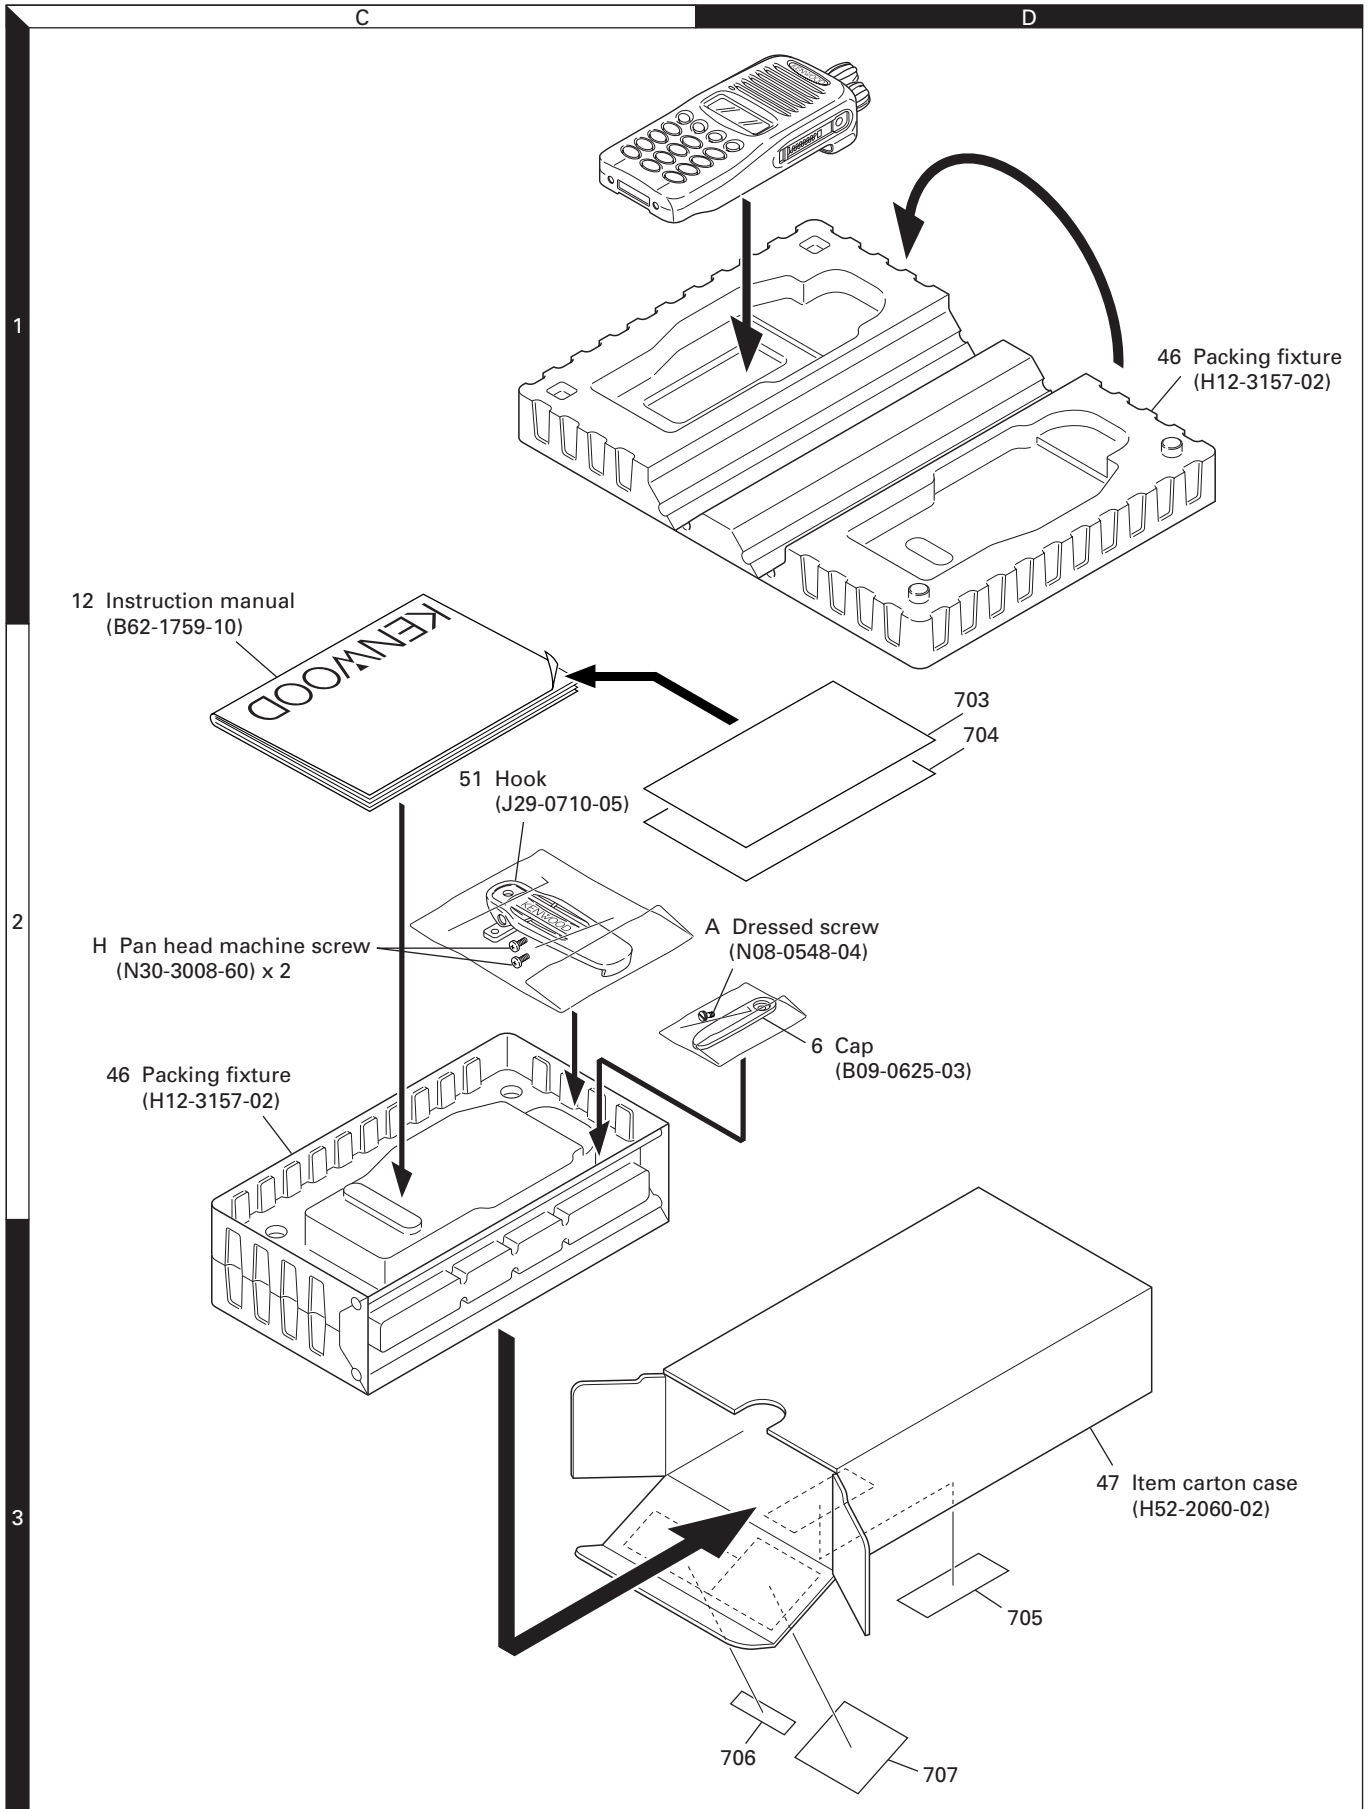

Parts with the exploded numbers larger than 700 are not supplied.

ADJUSTMENT

Controls

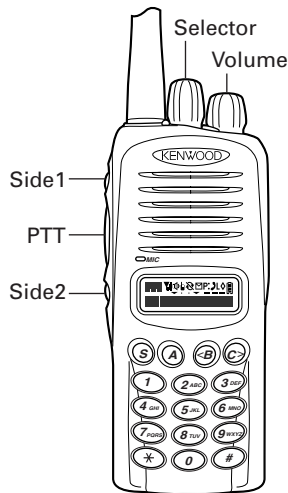

Key	"FNC" appears	
	Function	Display
[S]	High power / Low power	Low : L icon appears
[A]	Function off	-
[B]	Compander on/off	On : J icon appears
[C]	Beat shift on/off	On : ◇ icon appears
[Selector]	Test frequency CH up/down	-
[Side1]	Squelch level 0	On : P icon appears
[Side2]	LCD all lights	LCD all point appears
[PTT]	Transmit	-
[0] to [9] and [#],[*]	Function off	-

Notes :

- If a [S], [A], [B], [C] key is pressed during transmission, the DTMF corresponding to the key that was pressed is sent.
- The "Wide 4k" can not use, please skip it.

Panel Test Mode

■ Test mode operation features

This transceiver has a test mode. **To enter test mode, press [A] key and turn power on. Hold [A] key until frequency version appears on LCD.** Test mode can be inhibited by programming. To exit test mode, switch the power on again. The following functions are available in test mode.

■ Key operation

Key	"FNC" not appears	
	Function	Display
[S]	Shifts to Panel tuning mode	-
[A]	Function on	"FNC" appears
[B]	MSK 1200bps and 2400bps	2400bps : <input checked="" type="checkbox"/> icon appears
[C]	Test signaling CH up	Signaling No.
[Selector]	Test frequency CH up/down	Channel No.
[Side1]	Squelch on/off	🔊
[Side2]	Narrow/Wide 4k/Wide 5k	Narrow : "n" Wide 4k : "s" Wide 5k : "w"
[PTT]	Transmit	-
[0] to [9] and [#],[*]	Use as the DTMF keypad. If a key is pressed during transmission, the DTMF corresponding to the key that was presses is sent.	-


• LED indicator

- Red LED Lights during transmission. Blinks at the low battery voltage warning.
- Green LED Lights when there is carrier.

• Sub LCD indicator

"FNC" Appears at function on.

• LCD display in panel test mode

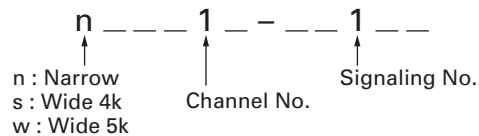

■ Frequency and Signaling

The set has been adjusted for the frequencies shown in the following table. When required, readjust them following the adjustment procedure to obtain the frequencies you want in actual operation.

• Test frequency

CH	K,K3		K2,K4	
	RX (MHz)	TX (MHz)	RX (MHz)	TX (MHz)
1	485.05000	485.10000	435.05000	435.10000
2	450.05000	450.10000	400.05000	400.10000
3	519.95000	519.90000	469.95000	469.90000
4	485.00000	485.00000	435.00000	435.00000
5	485.20000	485.20000	435.20000	435.20000
6	485.40000	485.40000	435.40000	435.40000
7~16	-	-	-	-

ADJUSTMENT

• Test signaling

No.	RX	TX
1	None	None
2	None	100Hz Square Wave
3	LTR Data : AREA=0, GOTO=12 HOME=12 ID=47, FREE=25	LTR Data : AREA=0, GOTO=12 HOME=12 ID=47, FREE=25
4	QT : 67.0Hz	QT : 67.0Hz
5	QT : 151.4Hz	QT : 151.4Hz
6	QT : 210.7Hz	QT : 210.7Hz
7	QT : 254.1Hz	QT : 254.1Hz
8	DQT : 023N	DQT : 023N
9	DQT : 754I	DQT : 754I
10	DTMF : 159D	DTMF : 159D
11	None	DTMF Code 9
12	2-tone : A : 304.7Hz B : 3106.0Hz	2-tone : A : 304.7Hz B : 3106.0Hz
13	Single Tone : 979.9Hz	Single Tone : 979.9Hz
14	None	Single Tone : 1000Hz
15	5-tone (CCIR 12345)	5-tone (CCIR 12345)
16	None	MSK
17	MSK : Preamble : 0xAAAA Sync : 0x23EB Data : 0x230960C6AAAA CRC : 0xC4D7	MSK : Preamble : 0xAAAA Sync : 0x23EB Data : 0x230960C6AAAA CRC : 0xC4D7

Note : The "5-tone signaling" can not use, please skip it.

Panel Tuning Mode

■ Preparations for tuning the transceiver

Before attempting to tune the transceiver, connect the unit to a suitable power supply.

Whenever the transmitter is turned, the unit must be connected to a suitable dummy load (i.e. power meter).

The speaker output connector must be terminated with a 8Ω dummy load and connected to an AC voltmeter and an audio distortion meter or a SINAD measurement meter at all times during tuning.

■ Transceiver tuning


(To place transceiver in tuning mode)

Press [S] key, now in tuning mode. Use [B] key to write tuning data through tuning modes, and [Selector] to adjust tuning requirements (1 to 256 appears on LCD).

Use [C] key to select the adjustment item through tuning modes. Use [A] key to adjust 3 or 5 reference level adjustments, and use [Side2] key to switch between Wide 5k/Wide 4k/Narrow.

Channel appears on LCD. Set channel according to tuning requirements.

• LCD display in panel tuning mode

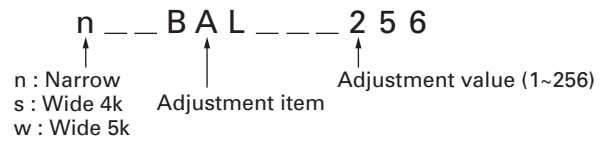

■ Key operation

Key	Function	
	Push	Hold (1 second)
[S]	End of panel tuning mode	-
[A]	To enter 3 or 5 reference level adjustments	-
[B]	Writes the adjustment value	-
[C]	Go to next adjustment item	Back to last adjustment item
[Selector]	Adjustment value up/down	
[Volume]	Volume level up/down	
[Side1]	Squelch on/off	-
[Side2]	Selects Narrow, Wide 4k, Wide 5k	-

■ 3 or 5 reference level adjustments frequency

Tuning point	K,K3		K2,K4	
	RX (MHz)	TX (MHz)	RX (MHz)	TX (MHz)
Low	450.05000	450.10000	400.05000	400.10000
Low'	469.05000	467.60000	427.05000	417.60000
Center	485.05000	485.10000	435.05000	435.10000
High'	502.55000	502.60000	452.55000	452.60000
High	519.95000	519.90000	469.95000	469.90000




■ Adjustment item and Display (***) : 1~256)

Order	Adjustment item	Display
1	Frequency	FREQ ***
2	Shift 1	SHFT1 ***
3	Shift 2	SHFT2 ***
4	High power	HPWR ***
5	Low power	LPWR ***
6	Balance	BAL ***
7	Max deviation	DEV ***
8	VOX 1	VOX1 ***
9	VOX 10	VOX10 ***
10	QT	QT ***
11	DQT	DQT ***
12	LTR	LTR ***
13	DTMF	DTMF ***
14	MSK	MSK ***
15	Tone	TONE ***
16	Sensitivity 1	SENS1 ***
17	Sensitivity 2	SENS2 ***
18	Squelch	SQL ***
19	Low RSSI	LRSSI ***
20	Squelch tight	SQLT ***
21	High RSSI	HRSSI ***
22	Battery	BATT ***

ADJUSTMENT

Flow chart

Note : The "Wide 4k" can not use, please skip it.

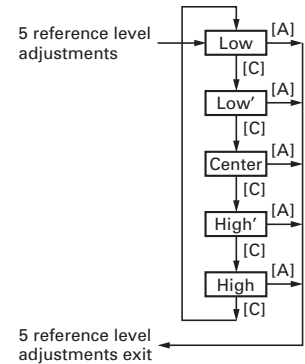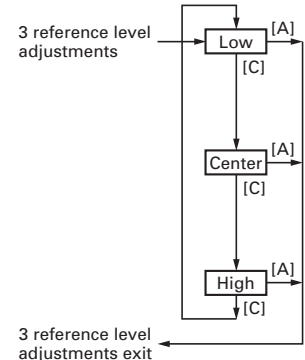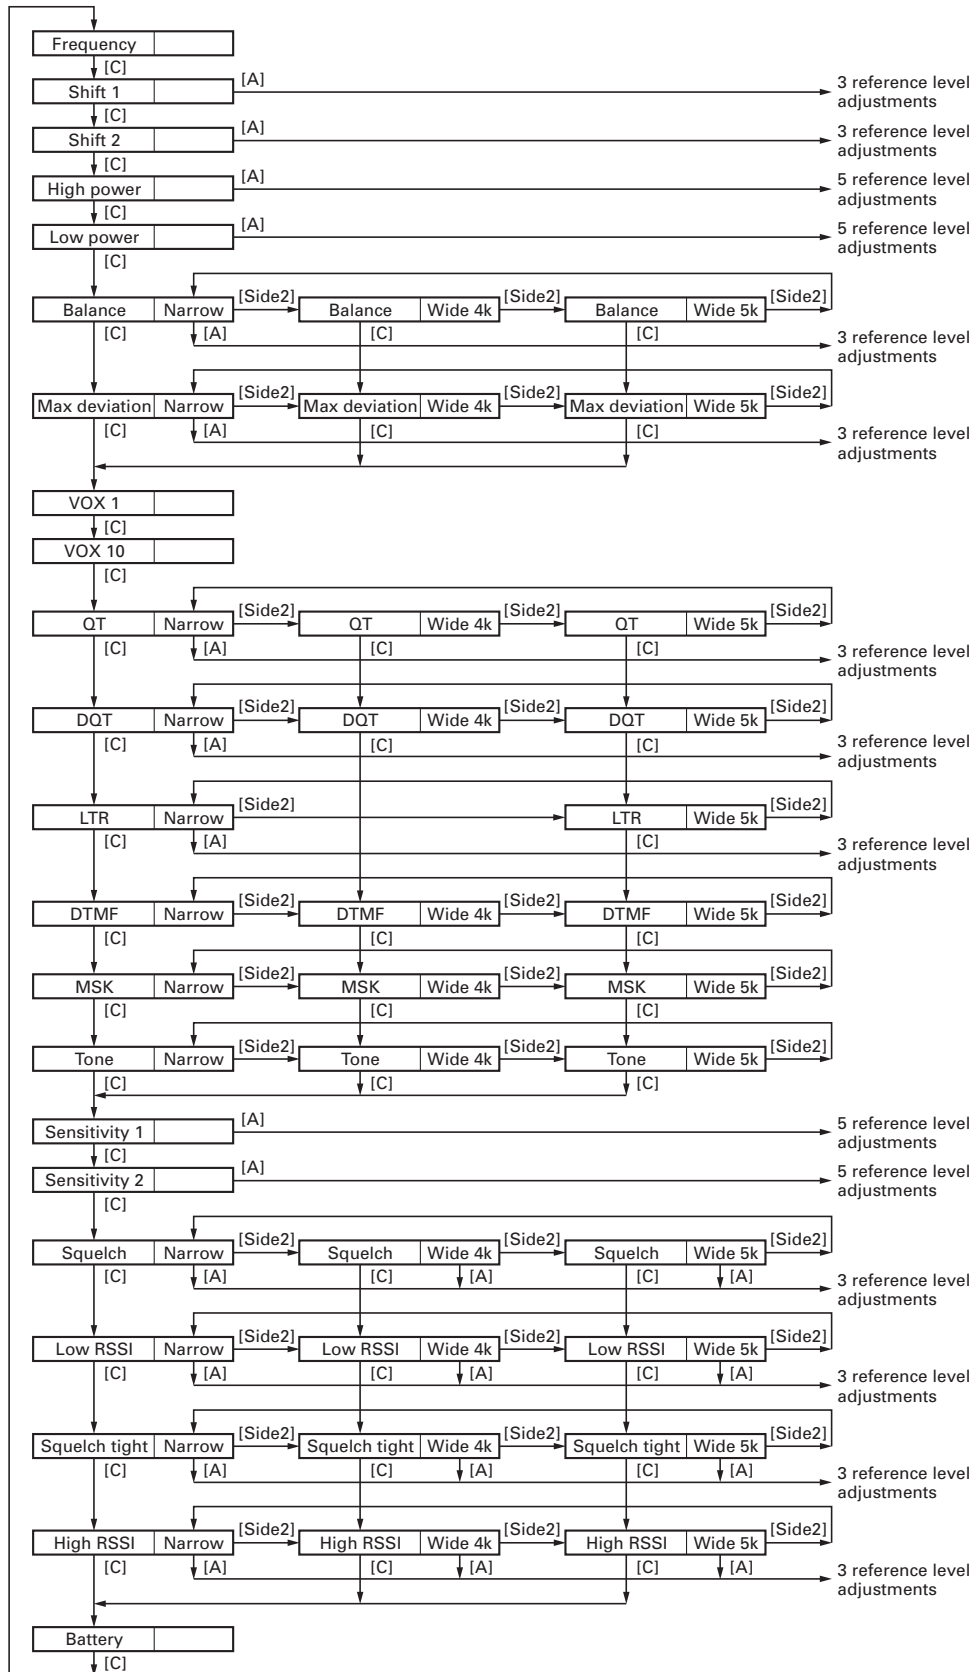

ADJUSTMENT

Test Equipment Required for Alignment

Test Equipment	Major Specifications	
1. Standard Signal Generator (SSG)	Frequency Range	400 to 520MHz
	Modulation	Frequency modulation and external modulation
	Output	-127dBm/0.1μV to greater than -47dBm/1mV
2. Power Meter	Input Impedance	50Ω
	Operation Frequency	400 to 520MHz or more
	Measurement Capability	Vicinity of 10W
3. Deviation Meter	Frequency Range	400 to 520MHz
4. Digital Volt Meter (DVM)	Measuring Range	10mV to 10V DC
	Input Impedance	High input impedance for minimum circuit loading
5. Oscilloscope		DC through 30MHz
6. High Sensitivity Frequency Counter	Frequency Range	10Hz to 1000MHz
	Frequency Stability	0.2ppm or less
7. Ammeter		5A
8. AF Volt Meter (AF VTVM)	Frequency Range	50Hz to 10kHz
	Voltage Range	1mV to 10V
9. Audio Generator (AG)	Frequency Range	50Hz to 5kHz or more
	Output	0 to 1V
10. Distortion Meter	Capability	3% or less at 1kHz
	Input Level	50mV to 10Vrms
11. 8Ω Dummy Load		Approx. 8Ω, 3W
12. Regulated Power Supply		5V to 10V, approx. 5A Useful if ammeter equipped

■ Universal connector


Use the interface cable (KPG-36) for PC tuning or the lead wire with plug (E30-3287-18) and screw (N08-0535-08) for panel tuning. Connect the plug to the universal connector of the radio and tighten the screw.

The lead wire with plug (E30-3287-18) and screw (N08-0535-08) terminals are as follows. Numbers are universal connector terminal numbers.

Caution



- When connecting the plug to the universal connector of the radio, a short circuit may occur. To prevent this, be sure to turn the radio POWER switch off.
- Since the RX AF output is a BTL output, there is a DC component. Isolate this with a capacitor or transformer as shown in the figure.
- Do not connect an instrument between red or black and GND.

• Universal connector

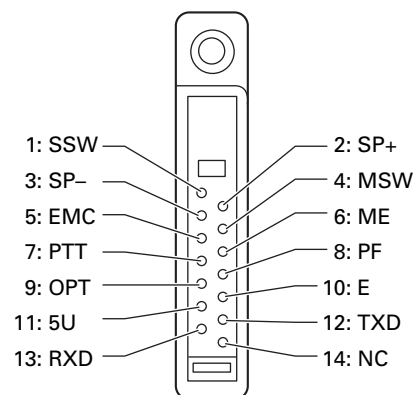

ADJUSTMENT

• Panel tuning

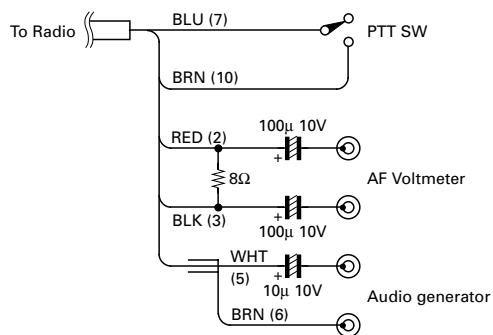
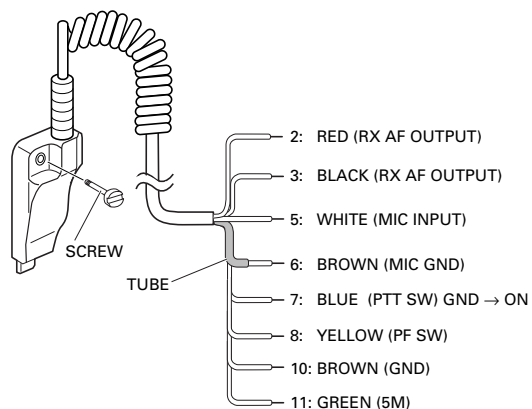


• PC tuning

Connect the wires to the PCB in the connector case of interface cable.


For output the wires out of the connector case, need to process the connector case.

KPG-36

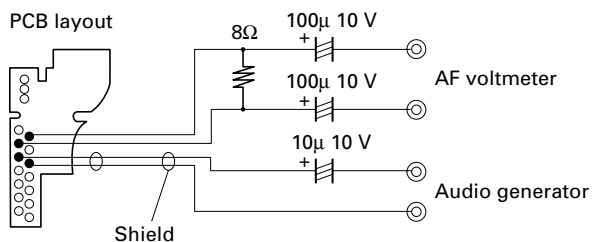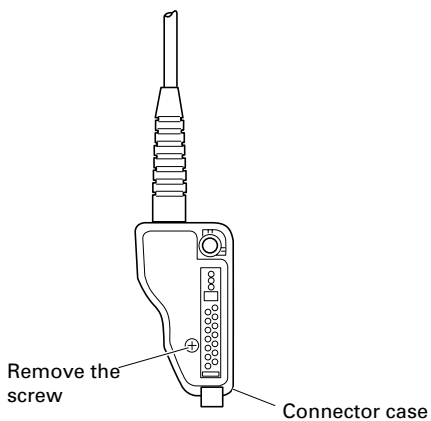

■ Repair jig (Chassis)


Use jig (part No. : A10-4077-04) for repairing the transceiver. Place the TX-RX unit on the jig and fit it with 14 screws.

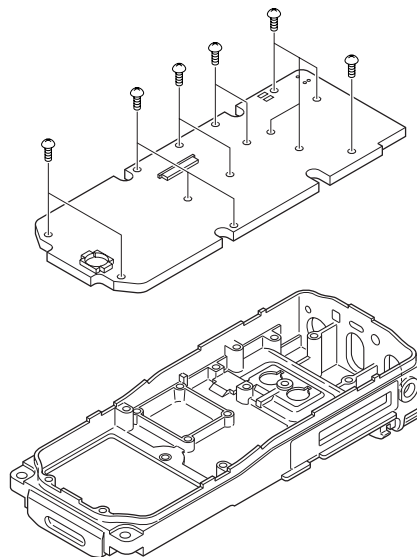

■ Check Jig for the VGS-1

KENWOOD part No. : W05-1127-00


to transceiver

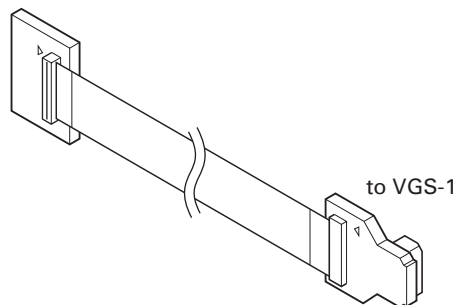

■ Nut wrench

In order to turn the volume nut and the channel selector nut, use a recommendation tool.

KENWOOD part No. : W05-1123-00

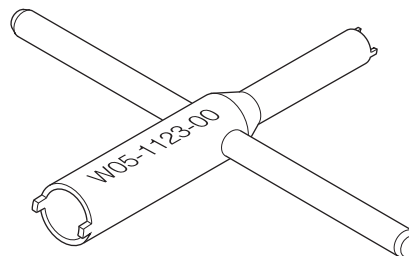

ADJUSTMENT

Common Section


Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Setting	1) BATT terminal voltage : 7.5V 2) SSG standard modulation [Wide 5k] MOD : 1kHz, DEV : 3kHz [Wide 4k] MOD : 1kHz, DEV : 2.4kHz [Narrow] MOD : 1kHz, DEV : 1.5kHz							
2. VCO lock voltage • RX	[Panel test mode] 1) CH-Sig : 3-1	Power meter	Panel	ANT	TX-RX	TC2	4.20V K,K3 4.30V K2,K4	±0.1V K,K3 ±0.05V K2,K4
	2) CH-Sig : 2-1	DVM	TX-RX	CV			Check	0.7V or more K,K3 0.6V or more K2,K4
	[Panel tuning mode] LPWR* 3) CH-Sig : 3-1 PTT : ON				TX-RX	TC1	4.20V K,K3 4.30V K2,K4	±0.1V K,K3 ±0.05V K2,K4
	4) CH-Sig : 2-1 PTT : ON						Check	0.7V or more K,K3 0.6V or more K2,K4
• TX								

* TX can be continued on unlock condition in panel tuning mode.

Transmitter Section (K market model skips adjustment of Wide 4k.)

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Frequency adjust	1) Adj item : [FREQ] Adjust : [***] PTT : ON	f. counter	Panel	ANT	Panel	Selector knob	Center frequency ±80Hz	Note : After replacing the TCXO (X1) align frequency.
2. Frequency shift 1 adjust	1) Adj item : [SHFT1] Adjust : [***] 2) Adj item : [L SHFT1] → [C SHFT1] → [H SHFT1] Adjust : [***] PTT : ON						[L SHFT1] Low frequency+5.00kHz [C SHFT1] Center frequency+5.00kHz [H SHFT1] High frequency+5.00kHz	±80Hz
3. Frequency shift 2 adjust	1) Adj item : [SHFT2] Adjust : [***] 2) Adj item : [L SHFT2] → [C SHFT2] → [H SHFT2] Adjust : [***] PTT : ON						[L SHFT2] Low frequency+6.25kHz [C SHFT2] Center frequency+6.25kHz [H SHFT2] High frequency+6.25kHz	±80Hz
4. High power adjust	1) Adj item : [HPWR] Adjust : [***] 2) Adj item : [L HPWR] → [L' HPWR] → [C HPWR] → [H' HPWR] → [H HPWR] Adjust : [***] PTT : ON	Power meter Ammeter					5.0W	±0.1W 2.3A or less
5. High power check	[Panel test mode] 1) CH-Sig : 1-1 PTT : ON						Check	4.5~5.5W 2.4A or less
	2) CH-Sig : 2-1 PTT : ON							
	3) CH-Sig : 3-1 PTT : ON							

ADJUSTMENT


Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
6. Low power adjust	1) Adj item : [LPWR] Adjust : [***] 2) Adj item : [L LPWR] → [L' LPWR] → [C LPWR] → [H' LPWR] → [H LPWR] Adjust : [***] PTT : ON	Power meter Ammeter	Panel	ANT	Panel	Selector knob	1.0W	±0.1W 1.2A or less
7. Low power check	[Panel test mode] 1) CH-Sig : 1-1 Set low power (Push [S]) PTT : ON						Check	0.7~1.4W 1.2A or less
	2) CH-Sig : 2-1 PTT : ON							
	3) CH-Sig : 3-1 PTT : ON							
8. DQT balance adjust	1) Adj item : [n BAL] Adjust : [***] Deviation meter filter LPF : 3kHz HPF : OFF • Narrow 2) Adj item : [nL BAL] → [nC BAL] → [nH BAL] Adjust : [***] PTT : ON	Deviation meter Oscilloscope AG AF VTVM	Panel	ANT Universal connector	Panel	Selector knob	Make the demodulation waves into square waves.	
	• Wide 4k 3) Adj item : [s BAL] Adjust : [***] PTT : ON							
	• Wide 5k 4) Adj item : [w BAL] Adjust : [***] PTT : ON							
9. Max DEV adjust	1) Adj item : [n DEV] Adjust : [***] AG : 1kHz/125mV at MIC terminal Deviation meter filter LPF : 15kHz HPF : OFF • Narrow 2) Adj item : [nL DEV] → [nC DEV] → [nH DEV] Adjust : [***] PTT : ON						2.10kHz (According to the larger +, -)	±50Hz
	• Wide 4k 3) Adj item : [s DEV] Adjust : [***] PTT : ON						3.35kHz (According to the larger +, -)	±50Hz
	• Wide 5k 4) Adj item : [w DEV] Adjust : [***] PTT : ON						4.40kHz (According to the larger +, -)	±50Hz
10. MIC sensitivity check	[Panel test mode] 1) CH-Sig : 1-1 DEV : 1.5kHz (Narrow) 2.4kHz (Wide 4k) 3.0kHz (Wide 5k) Deviation meter filter LPF : 15kHz HPF : OFF PTT : ON						Check	AG : 1kHz/6.7mV~18.3mV at MIC terminal

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
11. VOX1 adjust	1) Adj item : [VOX1] Adjust : [***] AG : 1kHz/45mV at MIC terminal	AG	Panel	Universal connector	Panel		After apply signal from AG, press [B] key that numeric will be stored in memory.	
12. VOX10 adjust	1) Adj item : [VOX10] Adjust : [***] AG : 1kHz/3mV at MIC terminal							
13. QT deviation adjust	1) Remove the panel tuning cable assembly from the universal connector. Adj item : [n QT] Adjust : [***] Deviation meter filter LPF : 3kHz HPF : OFF 2) Adj item : [nL QT] → [nC QT] → [nH QT] Adjust : [***] PTT : ON	Power meter Deviation meter Oscilloscope AG AF VTVM	Panel	ANT Universal connector	Panel	Selector knob	0.35kHz	±50Hz
• Narrow								
• Wide 4k	3) Adj item : [s QT] Adjust : [***] PTT : ON						0.60kHz	±50Hz
• Wide 5k	4) Adj item : [w QT] Adjust : [***] PTT : ON						0.75kHz	±50Hz
14. DQT deviation adjust	1) Adj item : [n DQT] Adjust : [***] Deviation meter filter LPF : 3kHz HPF : OFF 2) Adj item : [nL DQT] → [nC DQT] → [nH DQT] Adjust : [***] PTT : ON						0.35kHz	±50Hz
• Narrow								
• Wide 4k	3) Adj item : [s DQT] Adjust : [***] PTT : ON						0.60kHz	±50Hz
• Wide 5k	4) Adj item : [w DQT] Adjust : [***] PTT : ON						0.75kHz	±50Hz
15. LTR deviation adjust	1) Adj item : [n LTR] Adjust : [***] Deviation meter filter LPF : 3kHz HPF : OFF 2) Adj item : [nL LTR] → [nC LTR] → [nH LTR] Adjust : [***] PTT : ON						0.75kHz	±0.10kHz
• Narrow								
• Wide	3) Adj item : [w LTR] Adjust : [***] PTT : ON						1.00kHz	±0.10kHz

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications/Remarks	
		Test-equipment	Unit	Terminal	Unit	Parts	Method		
16. DTMF deviation adjust • Narrow	1) Adj item : [n DTMF] Adjust : [***] Deviation meter filter LPF : 15kHz HPF : OFF PTT : ON	Power meter Deviation meter Oscilloscope AG AF VTVM	Panel	ANT Universal connector	Panel	Selector knob	1.25kHz	±0.1kHz	
	• Wide 4k						2) Adj item : [s DTMF] Adjust : [***] PTT : ON	2.0kHz	±0.1kHz
	• Wide 5k						3) Adj item : [w DTMF] Adjust : [***] PTT : ON	2.5kHz	±0.1kHz
17. MSK deviation adjust • Narrow	1) Adj item : [n MSK] Adjust : [***] Deviation meter filter LPF : 15kHz HPF : OFF PTT : ON						1.5kHz	±0.1kHz	
	• Wide 4k						2) Adj item : [s MSK] Adjust : [***] PTT : ON	2.4kHz	±0.1kHz
	• Wide 5k						3) Adj item : [w MSK] Adjust : [***] PTT : ON	3.0kHz	±0.1kHz
18. TONE deviation adjust • Narrow	1) Adj item : [n TONE] Adjust : [***] Deviation meter filter LPF : 15kHz HPF : OFF PTT : ON						1.5kHz	±0.1kHz	
	• Wide 4k						2) Adj item : [s TONE] Adjust : [***] PTT : ON	2.4kHz	±0.1kHz
	• Wide 5k						3) Adj item : [w TONE] Adjust : [***] PTT : ON	3.0kHz	±0.1kHz
19. BATT detection writing	1) Adj item : [BATT] Adjust : [***] PTT : ON	Power meter DVM	Panel	ANT BATT terminal	Panel		After pressing the PTT switch, confirm that one predetermined numeric in the range 1 to 256 appears and then press [B] key. That numeric will be stored in memory.	BATT terminal voltage : 5.8V	
20. BATT detection check	[Panel test mode] 1) CH-Sig : 1-1 BATT terminal voltage : 6.6V Connect "S" terminal to GND. PTT : ON						Check	The transceiver can transmit without causing the LED to blink.	
	2) BATT terminal voltage : 5.8V Connect "S" terminal to GND. PTT : ON							The transceiver should not transmit and LED blinking.	



ADJUSTMENT

Receiver Section (K market model skips adjustment of Wide 4k.)

Item	Condition	Measurement			Adjustment			Specifications/Remarks	
		Test-equipment	Unit	Terminal	Unit	Parts	Method		
1. Sensitivity fixed value write K,K3	1) Adj item : [H SENS1]	SSG	Panel	ANT	Panel	Selector knob		Write the value to "150"	
	2) Adj item : [L SENS2] → [L' SENS2] → [C SENS2] → [H' SENS2]	AF VTVM Oscilloscope		Universal connector				Write the value as followings [L SENS2] : "1" [L' SENS2] : "27" [C SENS2] : "49" [H' SENS2] : "63"	
	K2,K4	1) Adj item : [H' SENS1]→ [H SENS1]							Write the value as followings [H' SENS1] : "100" [H SENS1] : "256"
		2) Adj item : [L SENS2] → [L' SENS2] → [C SENS2]							Write the value as followings [L SENS2] : "1" [L' SENS2] : "20" [C SENS2] : "40"
2. Sensitivity 2 adjust K,K3	1) Adj item : [H SENS2] Adjust : [***] SSG output : -119dBm (0.25μV) (MOD : 1kHz±1.5kHz)					Adjust for 12dB SINAD	Rotate the selector knob and increase the adjustment value starting from "1" to obtain SINAD 12dB.		
	K2,K4 1) Adj item : [H SENS2] [H' SENS2] Adjust : [***] SSG output : -119dBm (0.25μV) (MOD : 1kHz±1.5kHz)								
3. Sensitivity 1 adjust K,K3	1) Adj item : [SENS1] Adjust : [***] 2) Adj item : [L SENS1] → [L' SENS1] → [C SENS1] → [H' SENS1] Adjust : [***] SSG output : -119dBm (0.25μV) (MOD : 1kHz±1.5kHz)						Rotate the selector knob and decrease the adjustment value starting from "256" to obtain SINAD 12dB.		
	K2,K4 1) Adj item : [SENS1] Adjust : [***] 2) Adj item : [L SENS1] → [L' SENS1] → [C SENS1] SSG output : -119dBm (0.25μV) (MOD : 1kHz±1.5kHz)								
4. Sensitivity check	[Panel test mode] 1) CH-Sig : 1-1 SSG output Wide 5k : -118dBm (0.28μV) (MOD : 1kHz±3kHz) Narrow : -118dBm (0.28μV) (MOD : 1kHz±1.5kHz)					Check	12dB SINAD or more		
5. Squelch (Preset) adjust • Narrow	1) Adj item : [n SQL] Adjust : [***] SSG output : -118dBm (0.28μV) (MOD : 1kHz±1.5kHz)				Panel	Selector knob	After input signal from SSG, press [B] key. That numeric will be stored in memory.	After adjusting SQL, check SQL open/close. SSG -118dBm : Open SSG OFF : Close [nC SQL] MOD 1kHz±1.5kHz [sC SQL] MOD 1kHz±2.4kHz [wC SQL] MOD 1kHz±3.0kHz	
	2) Adj item : [nL SQL] → [nC SQL] → [nH SQL] Adjust : [***]								


ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
• Wide 4k	3) Adj item : [s SQL] Adjust : [***] SSG output : -118dBm (0.28μV) (MOD : 1kHz±2.4kHz)	SSG AF VTVM Oscilloscope	Panel	ANT	Panel	Selector knob	After input signal from SSG, press [B] key. That numeric will be stored in memory.	After adjusting SQL, check SQL open/close. SSG -118dBm : Open SSG OFF : Close [nC SQL] MOD 1kHz±1.5kHz [sC SQL] MOD 1kHz±2.4kHz [wC SQL] MOD 1kHz±3.0kHz
	Universal connector							
• Wide 5k	4) Adj item : [sL SQL] → [sC SQL] → [sH SQL] Adjust : [***]							
	5) Adj item : [w SQL] Adjust : [***] SSG output : -118dBm (0.28μV) (MOD : 1kHz±3.0kHz)							
• Wide 4k	6) Adj item : [wL SQL] → [wC SQL] → [wH SQL] Adjust : [***]							
	6. Low RSSI adjust • Narrow						After input signal from SSG, press [B] key. That numeric will be stored in memory.	
• Wide 4k	1) Adj item : [n LRSSI] Adjust : [***] SSG output : -118dBm (0.28μV) (MOD : 1kHz±1.5kHz)							
	2) Adj item : [nL LRSSI] → [nC LRSSI] → [nH LRSSI] Adjust : [***]							
• Wide 5k	3) Adj item : [s LRSSI] Adjust : [***] SSG output : -118dBm (0.28μV) (MOD : 1kHz±2.4kHz)							
	4) Adj item : [sL LRSSI] → [sC LRSSI] → [sH LRSSI] Adjust : [***]							
• Wide 5k	5) Adj item : [w LRSSI] Adjust : [***] SSG output : -118dBm (0.28μV) (MOD : 1kHz±3.0kHz)							
	6) Adj item : [wL LRSSI] → [wC LRSSI] → [wH LRSSI] Adjust : [***]							
7. Squelch (Tight) adjust • Narrow	1) Adj item : [n SQLT] Adjust : [***] SSG output : -113dBm (0.5μV) (MOD : 1kHz±1.5kHz)						After input signal from SSG, press [B] key. That numeric will be stored in memory.	After adjusting SQL, check SQL open/close. SSG -113dBm : Open SSG OFF : Close [nC SQLT] MOD 1kHz±1.5kHz [sC SQLT] MOD 1kHz±2.4kHz [wC SQLT] MOD 1kHz±3.0kHz
	2) Adj item : [nL SQLT] → [nC SQLT] → [nH SQLT] Adjust : [***]							
• Wide 4k	3) Adj item : [s SQLT] Adjust : [***] SSG output : -113dBm (0.5μV) (MOD : 1kHz±2.4kHz)							
	4) Adj item : [sL SQLT] → [sC SQLT] → [sH SQLT] Adjust : [***]							

ADJUSTMENT


Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
<ul style="list-style-type: none"> Wide 5k 	5) Adj item : [w SQLT] Adjust : [***] SSG output : -113dBm (0.5μV) (MOD : 1kHz±3.0kHz)	SSG AF VTVM Oscilloscope	Panel	ANT Universal connector	Panel	Selector knob	After input signal from SSG, press [B] key. That numeric will be stored in memory.	After adjusting SQL, check SQL open/close. SSG -113dBm : Open SSG OFF : Close [nC SQLT] MOD 1kHz±1.5kHz [sC SQLT] MOD 1kHz±2.4kHz [wC SQLT] MOD 1kHz±3.0kHz
	6) Adj item : [wL SQLT] → [wC SQLT] → [wH SQLT] Adjust : [***]							
8. High RSSI adjust <ul style="list-style-type: none"> Narrow 	1) Adj item : [n HRSSI] Adjust : [***] SSG output : -70dBm (MOD : 1kHz±1.5kHz)							
	2) Adj item : [nL HRSSI] → [nC HRSSI] → [nH HRSSI] Adjust : [***]							
<ul style="list-style-type: none"> Wide 4k 	3) Adj item : [s HRSSI] Adjust : [***] SSG output : -70dBm (MOD : 1kHz±2.4kHz)							
	4) Adj item : [sL HRSSI] → [sC HRSSI] → [sH HRSSI] Adjust : [***]							
<ul style="list-style-type: none"> Wide 5k 	5) Adj item : [w HRSSI] Adjust : [***] SSG output : -70dBm (MOD : 1kHz±3.0kHz)							
	6) Adj item : [wL HRSSI] → [wC HRSSI] → [wH HRSSI] Adjust : [***]							

Adjustment Points

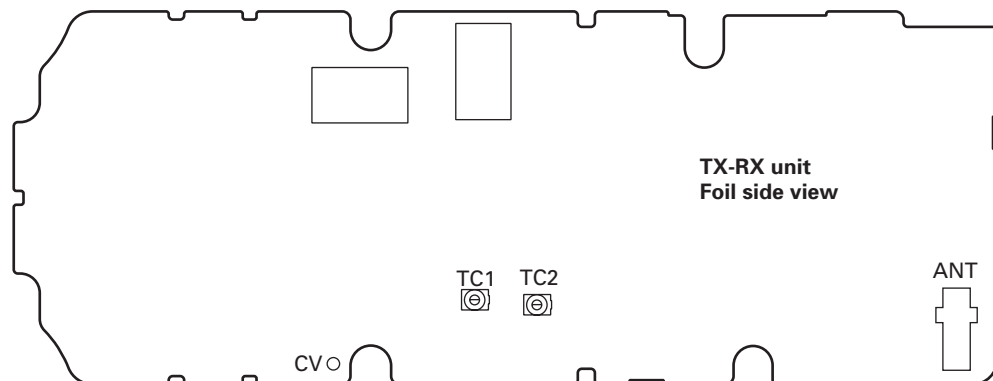

TK-3180 PC BOARD



DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4
 Component side view (J72-0921-19)

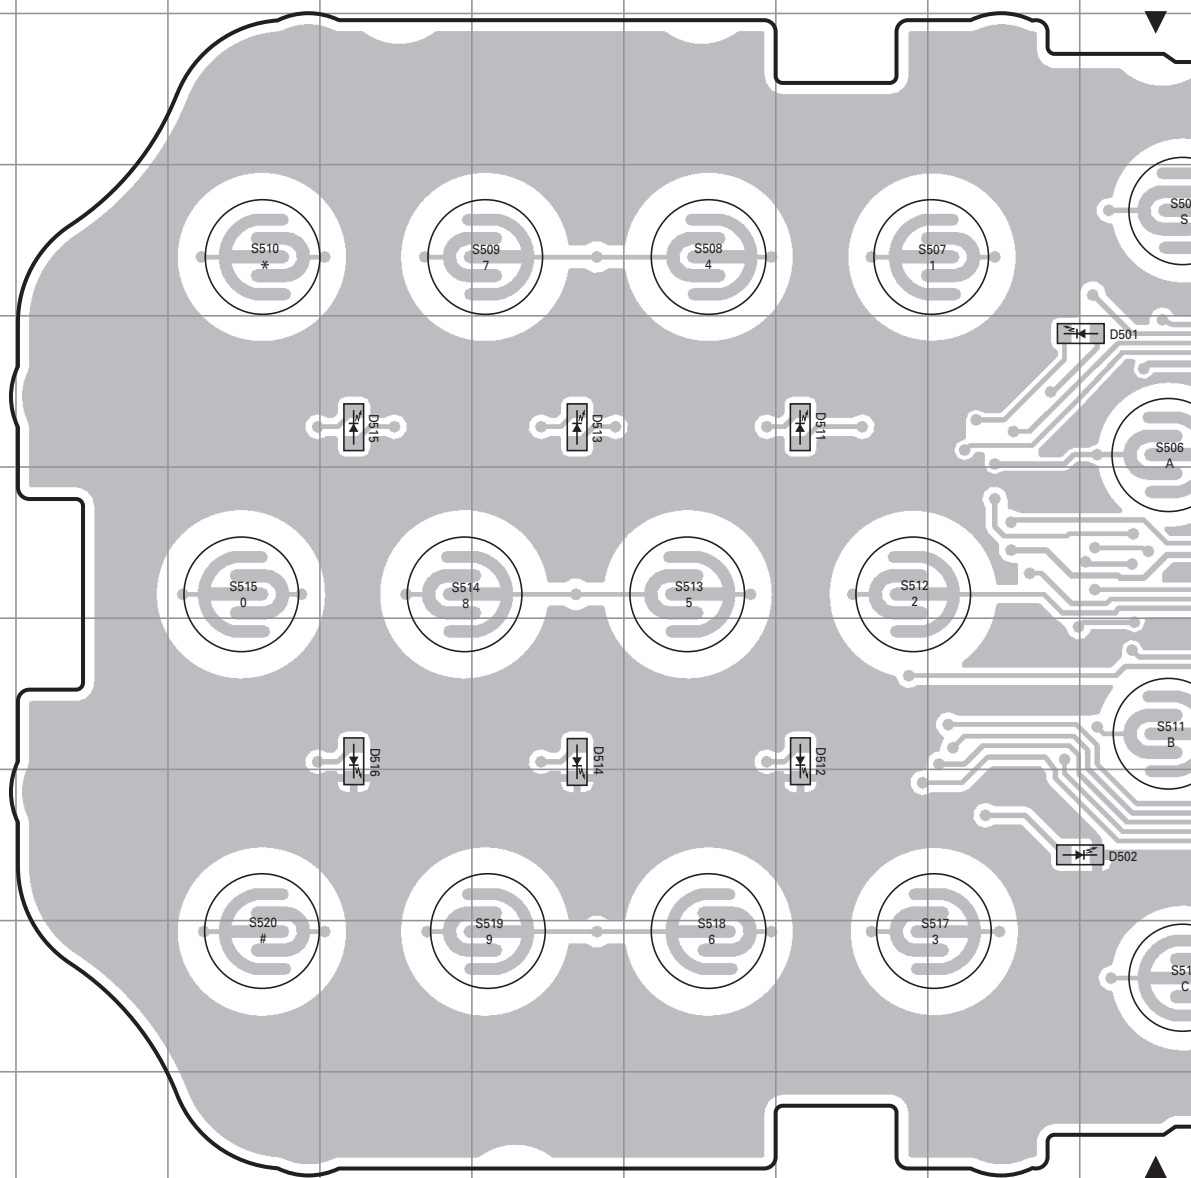

Ref. No.	Address	Ref. No.	Address
D501	5J	D515	5E
D502	8J	D516	7E
D511	5H	D517	3M
D512	7H	D518	3N
D513	5F	D519	10N
D514	7F	D520	10M


PC BOARD TK-3180

DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4
Component side view (J72-0921-19)

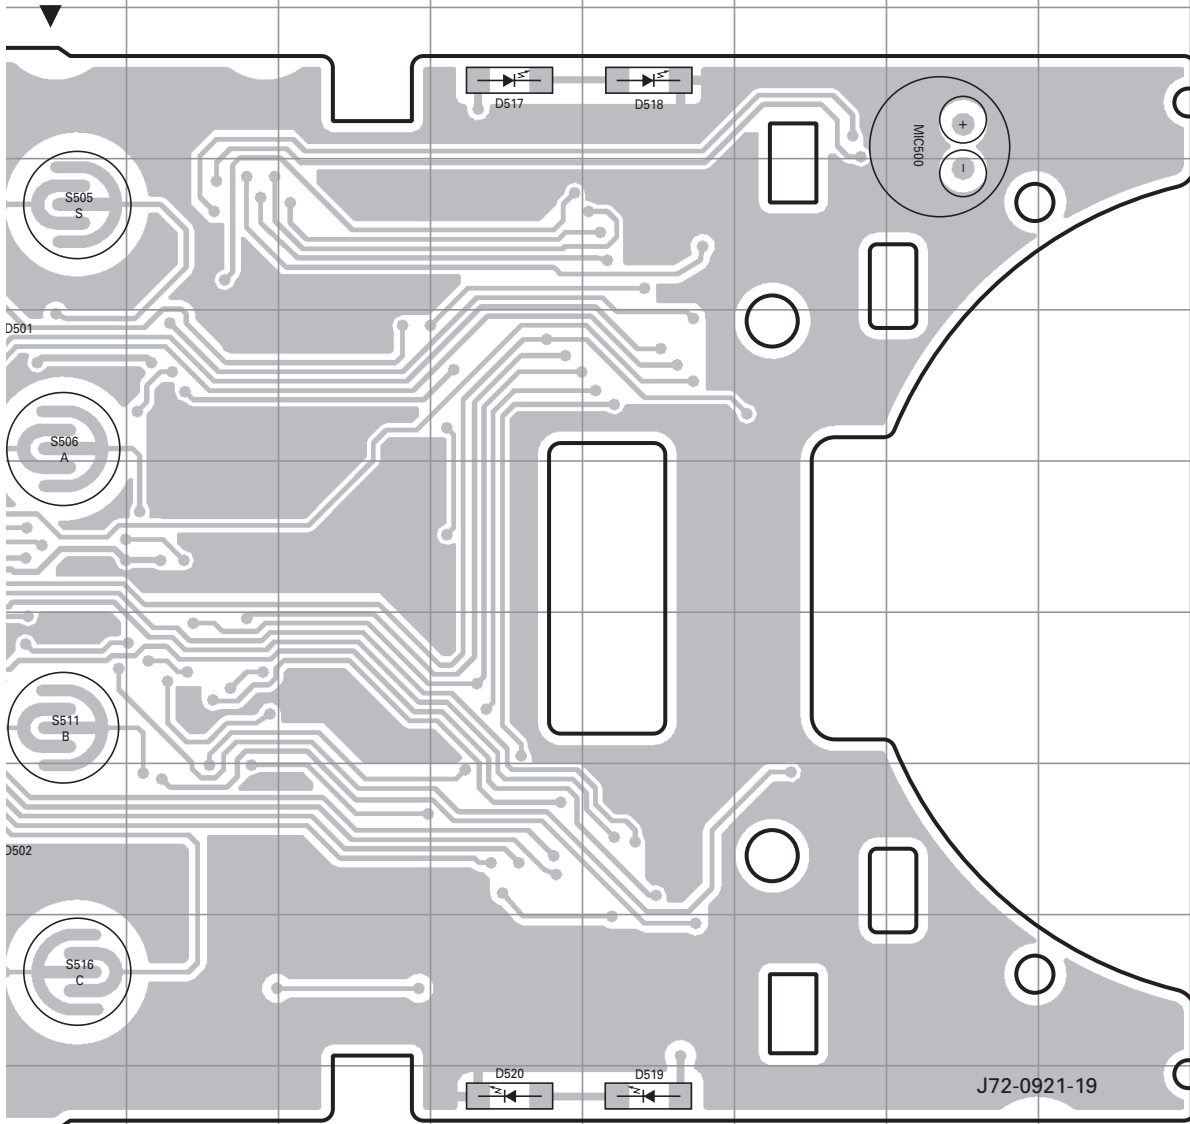


DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4
Component side view (J72-0921-19)

DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4
Component side view (J72-0921-19)

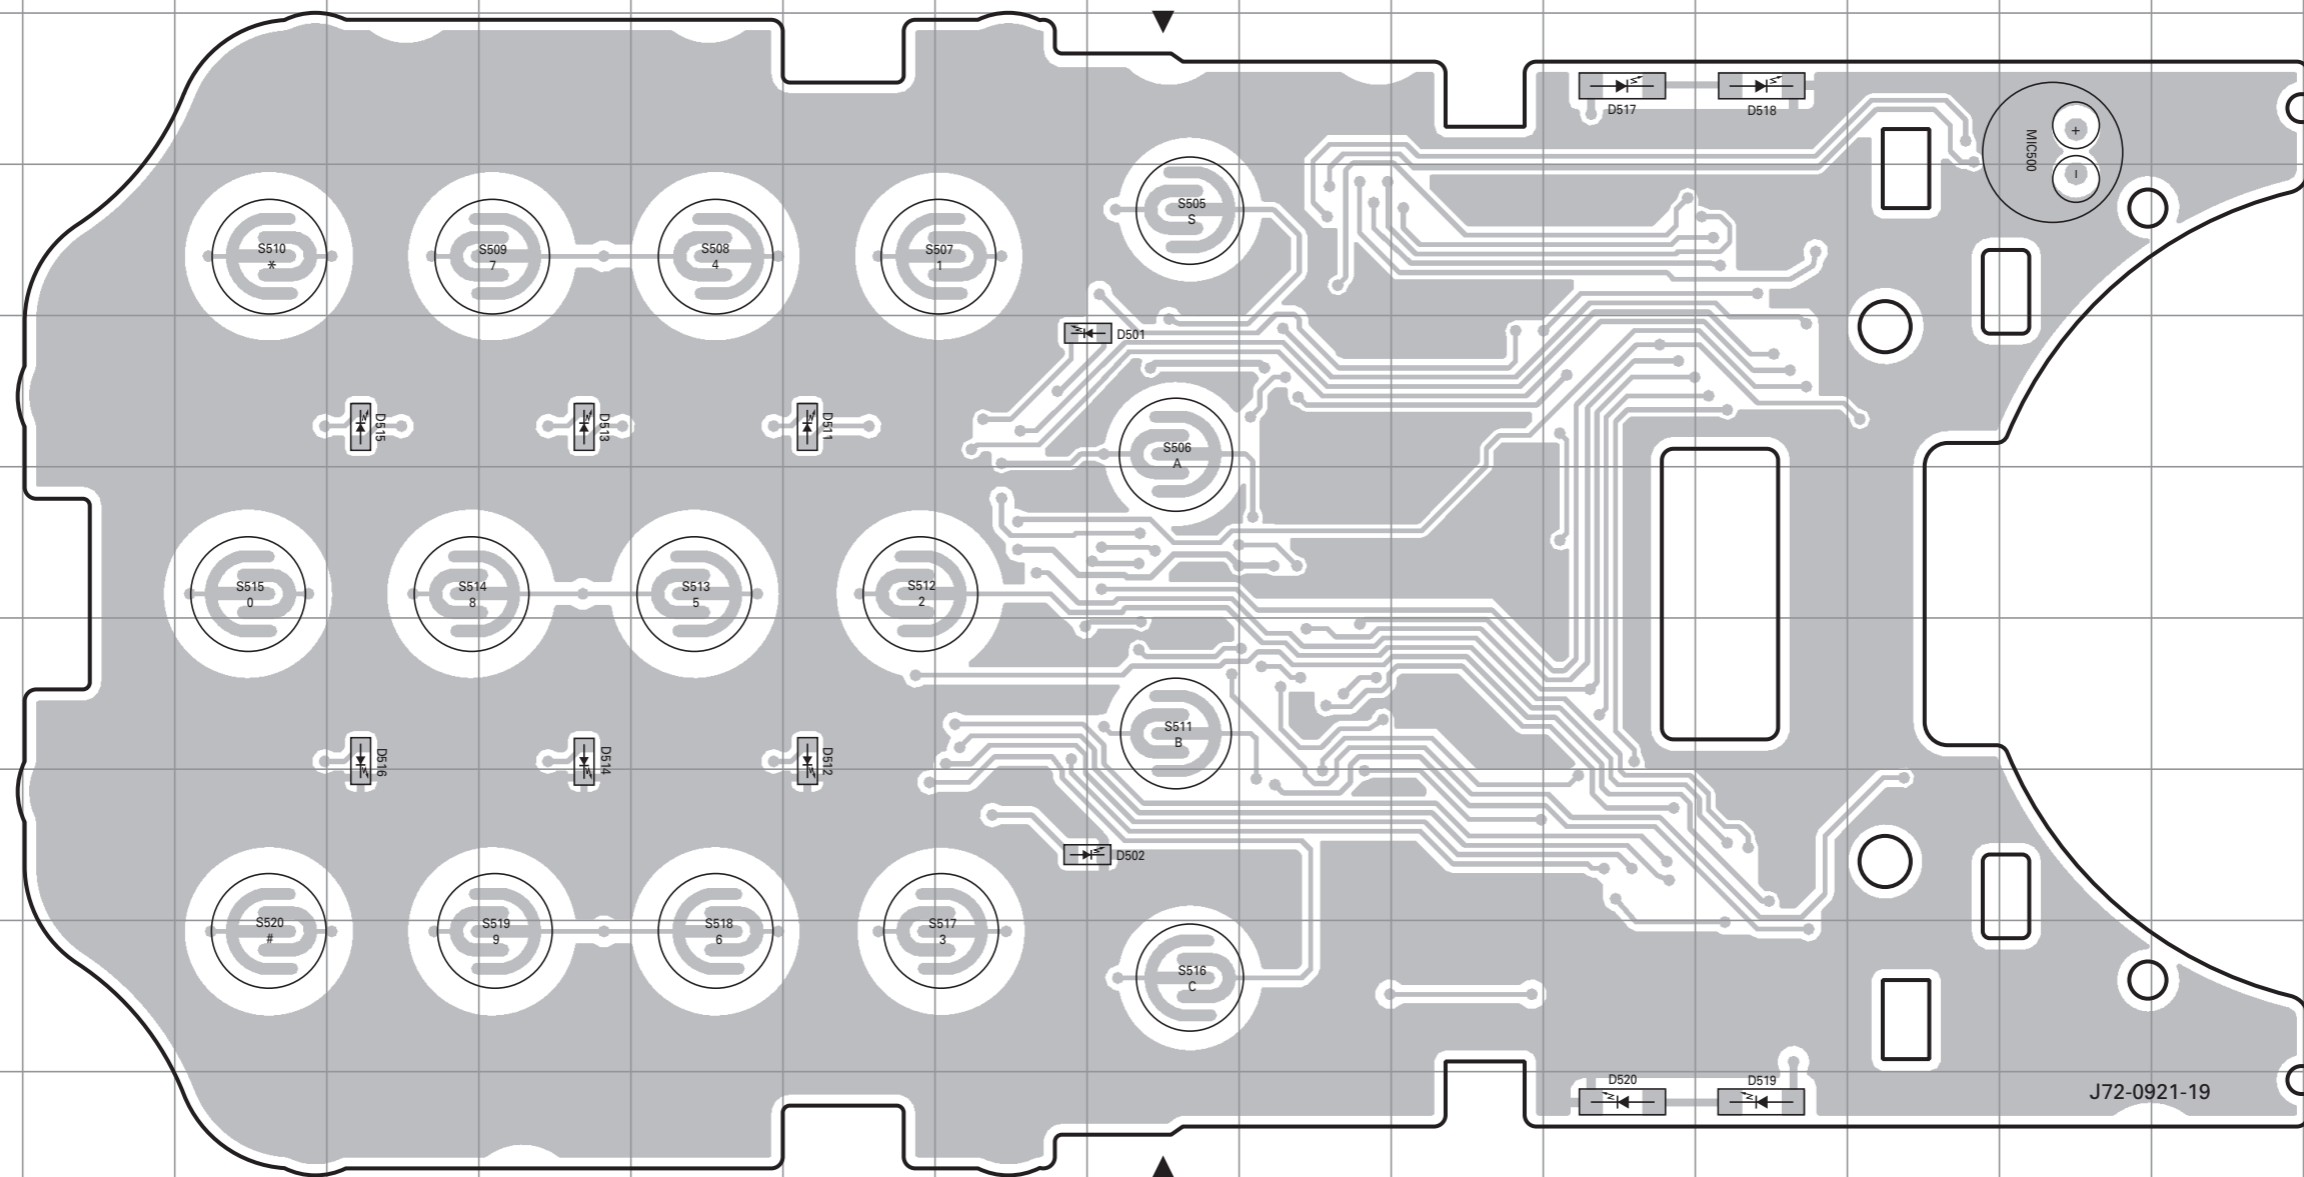


Ref. No.	Address	Ref. No.	Address
D501	5J	D515	5E
D502	8J	D516	7E
D511	5H	D517	3M
D512	7H	D518	3N
D513	5F	D519	10N
D514	7F	D520	10M



J72-0921-19

J K L M N O P Q R S
PC BOARD TK-3180


DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4
Foil side view (J72-0921-19)

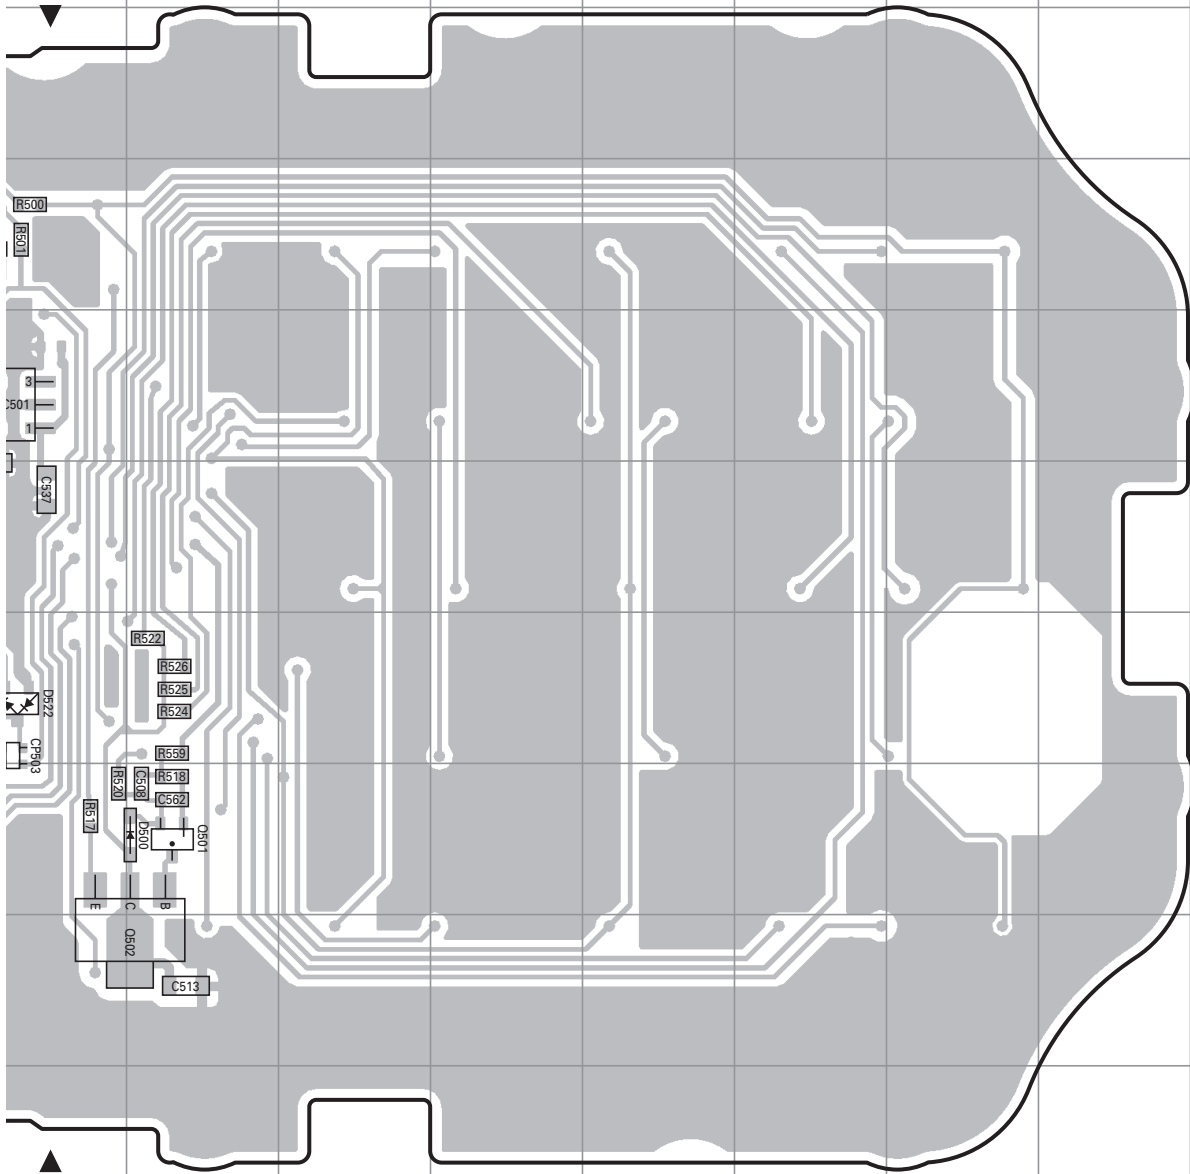


Component side
Layer 1
Layer 2
Foil side

DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4
Foil side view (J72-0921-19)

DISPLAY UNIT (X54-3470-XX) -10 : K,K2 -11 : K3,K4
Foil side view (J72-0921-19)

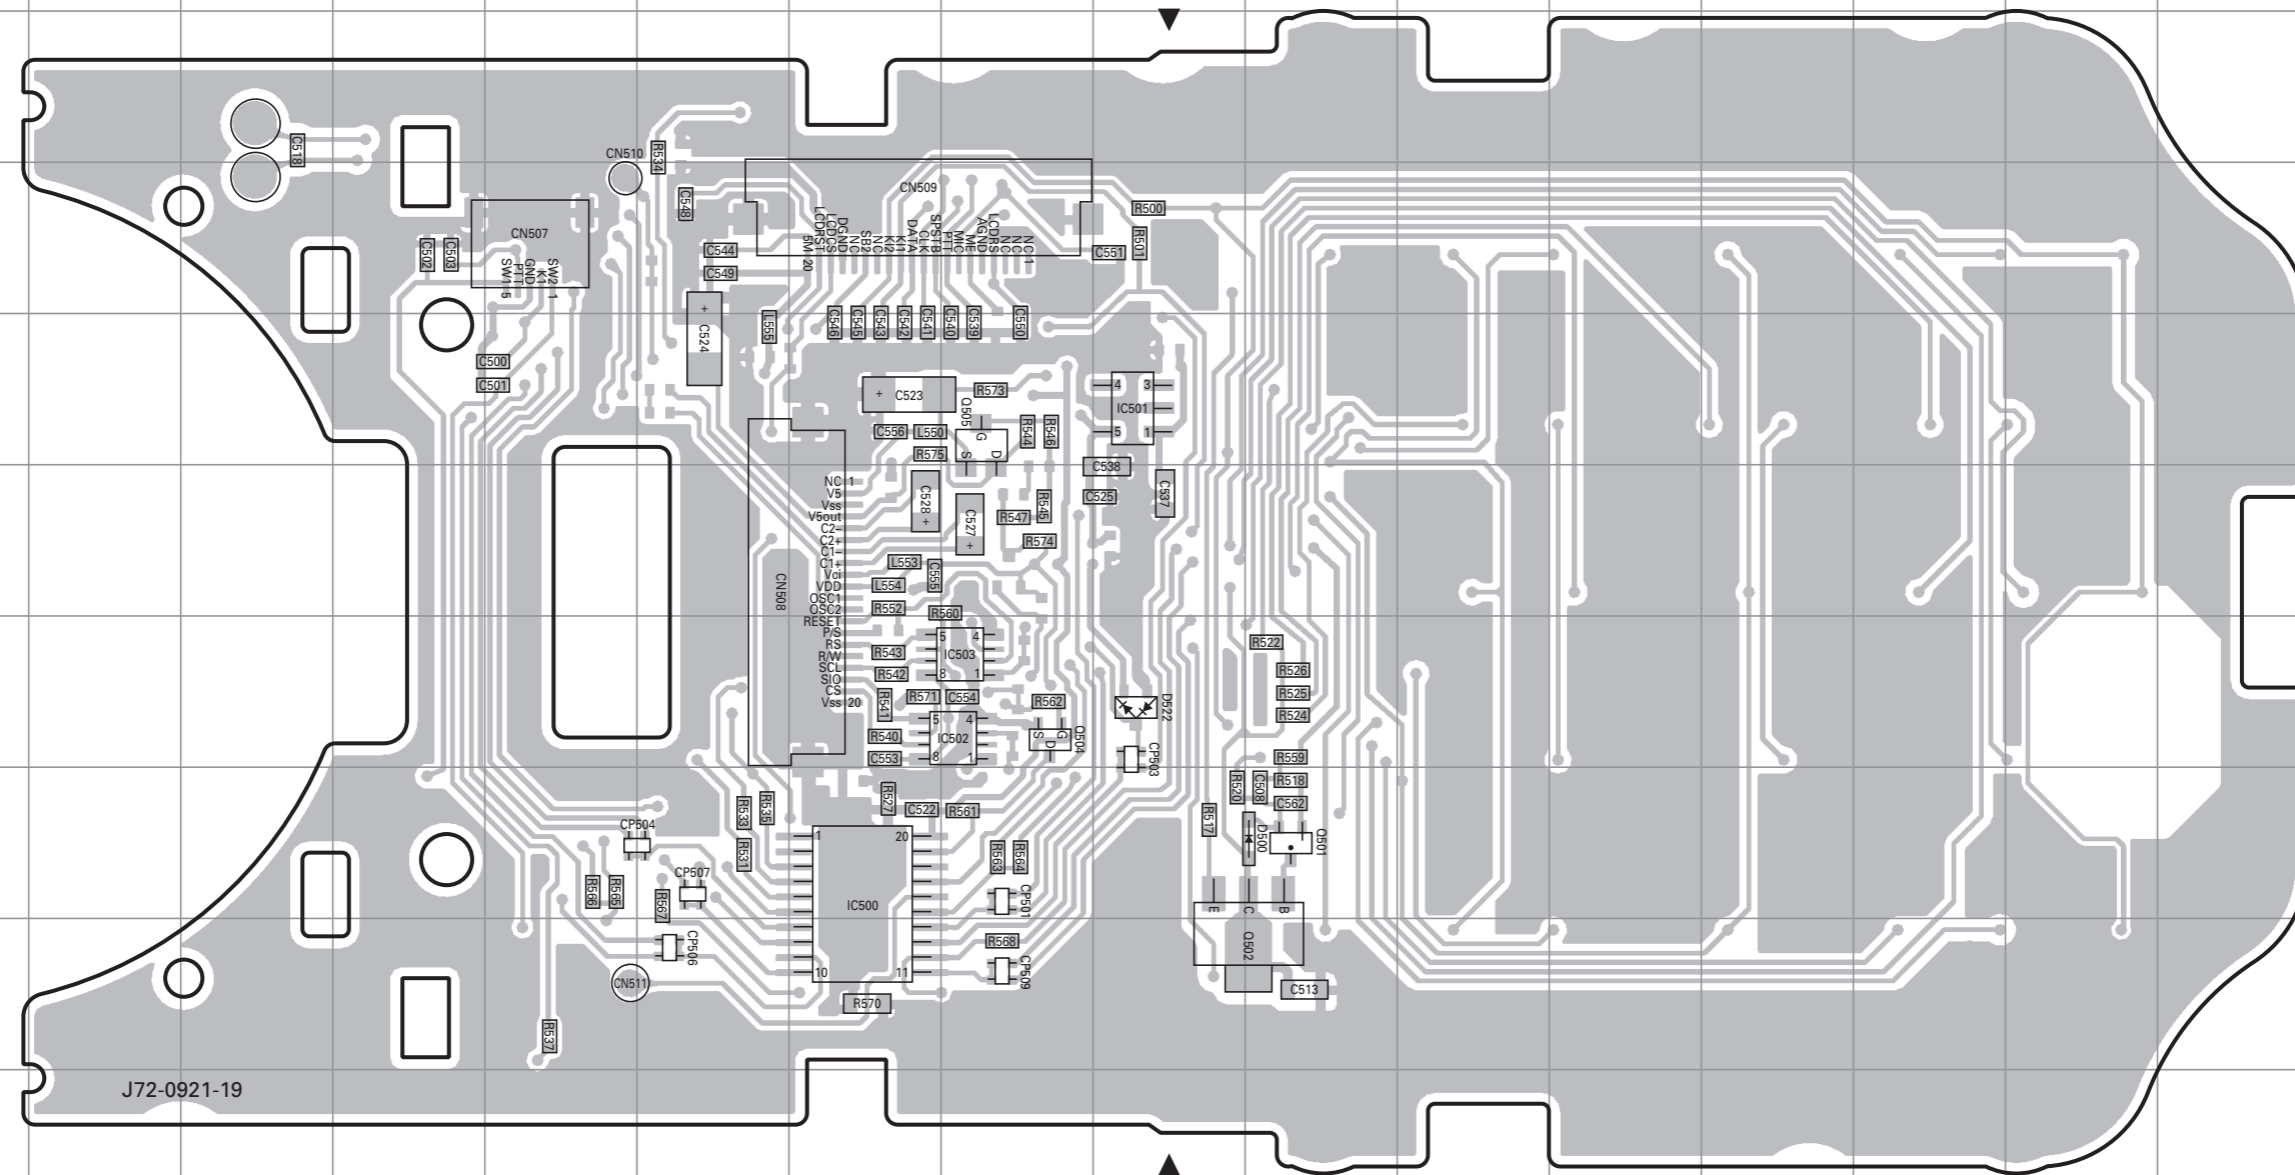


Ref. No.	Address	Ref. No.	Address
IC500	8H	Q502	9K
IC501	5J	Q504	7I
IC502	7I	Q505	5I
IC503	7I	D500	8K
Q501	8K	D522	7J

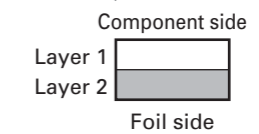

TK-3180 PC BOARD



TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4
Component side view (J72-0920-09)

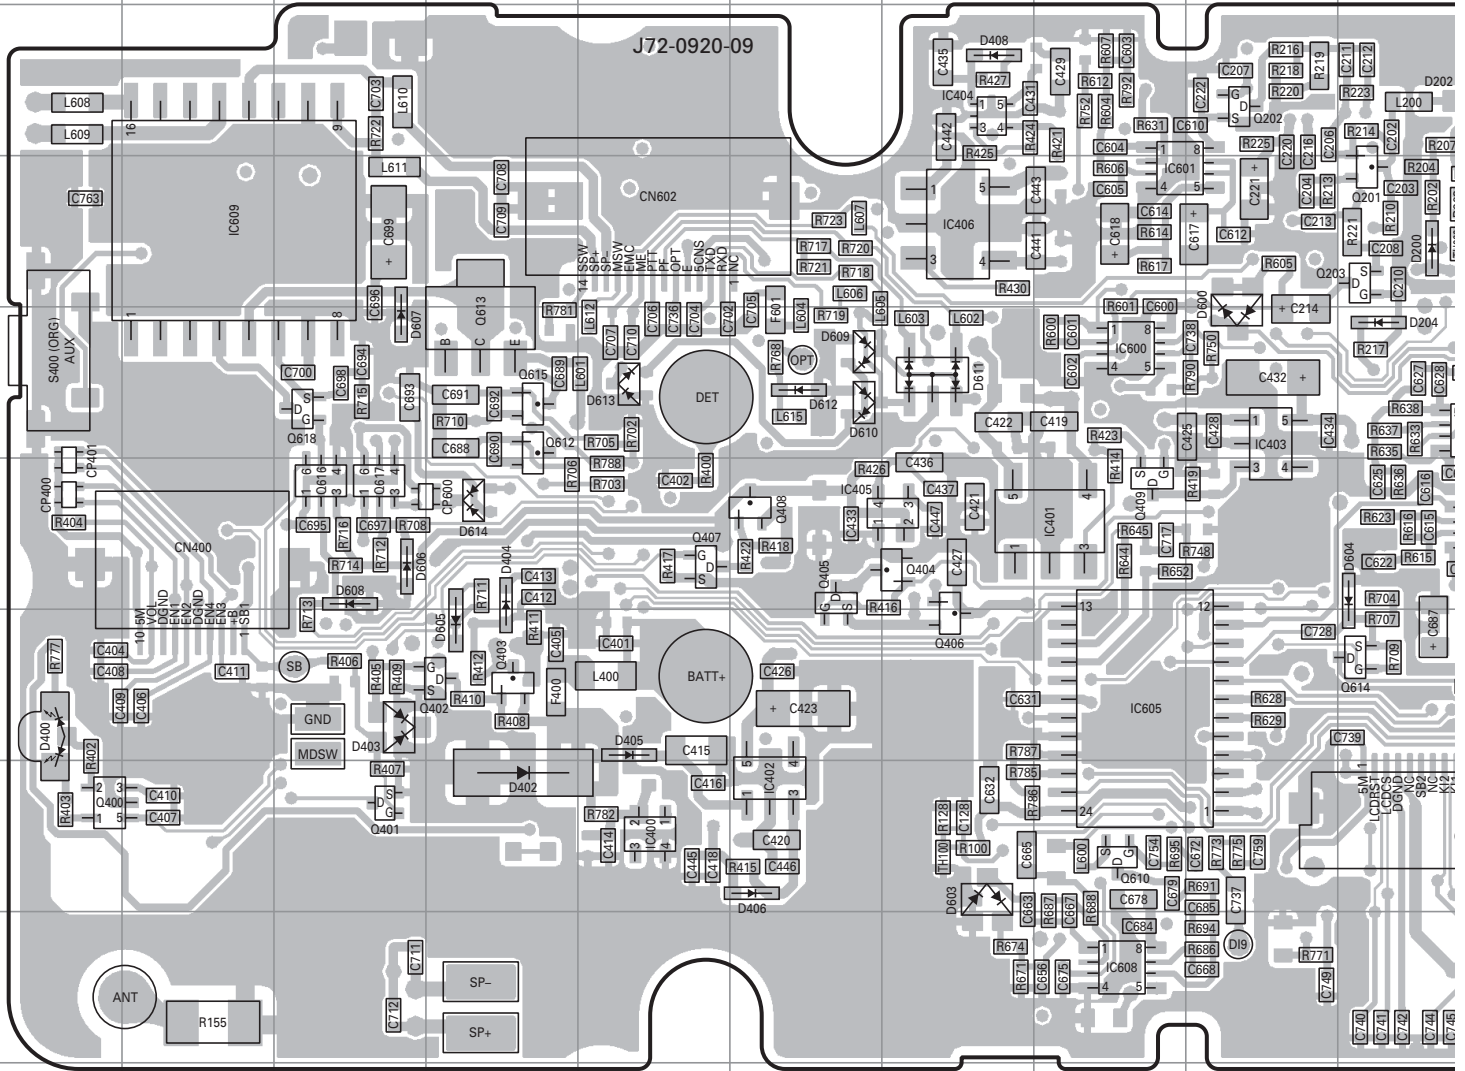

Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC400	8E	IC602	7K	Q403	7D	Q610	8H	D204	5J	D603	8G
IC401	6H	IC603	6J	Q404	6G	Q611	3K	D400	7A	D604	6J
IC402	8F	IC604	5J	Q405	6F	Q612	5D	D402	8D	D605	7D
IC403	5I	IC605	7H	Q406	7G	Q613	5D	D403	7C	D606	6C
IC404	3G	IC606	6L	Q407	6E	Q614	7J	D404	6D	D607	5C
IC405	6G	IC607	5L	Q408	6F	Q615	5D	D405	7E	D608	6C
IC406	4G	IC608	9H	Q409	6H	Q616	6C	D406	8F	D609	5F
IC500	9P	IC609	4B	Q502	5N	Q617	6C	D408	3G	D610	5F
IC502	6P	Q201	4J	Q602	6L	Q618	5C	D500	4R	D611	5G
IC503	4Q	Q202	3I	Q605	4K	Q619	7L	D501	3R	D612	5F
IC504	3Q	Q203	4J	Q606	8M	Q620	4K	D502	4R	D613	5E
IC505	8N	Q400	8A	Q607	8M	Q621	4P	D600	5I	D614	6D
IC600	5H	Q401	8C	Q608	5K	D200	4J	D601	8L		
IC601	4H	Q402	7D	Q609	3K	D202	3J	D602	8L		

PC BOARD TK-3180

TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4
Component side view (J72-0920-09)

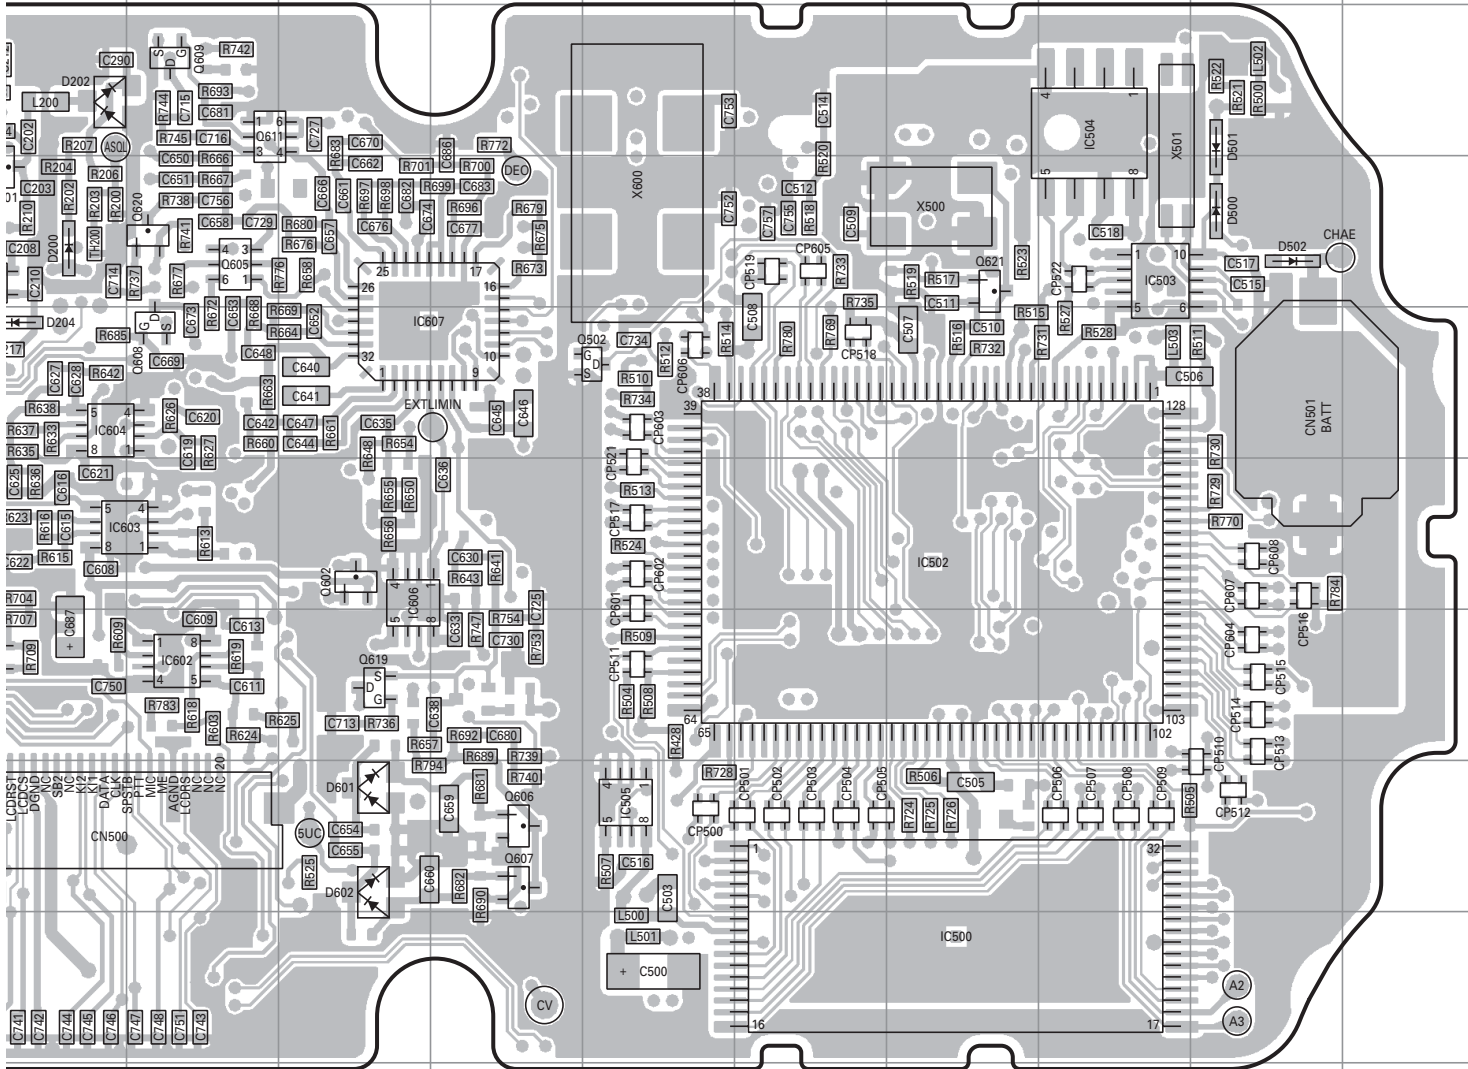


TK-3180 PC BOARD


PC BOARD TK-3180

TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4
Component side view (J72-0920-09)

TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4
Component side view (J72-0920-09)

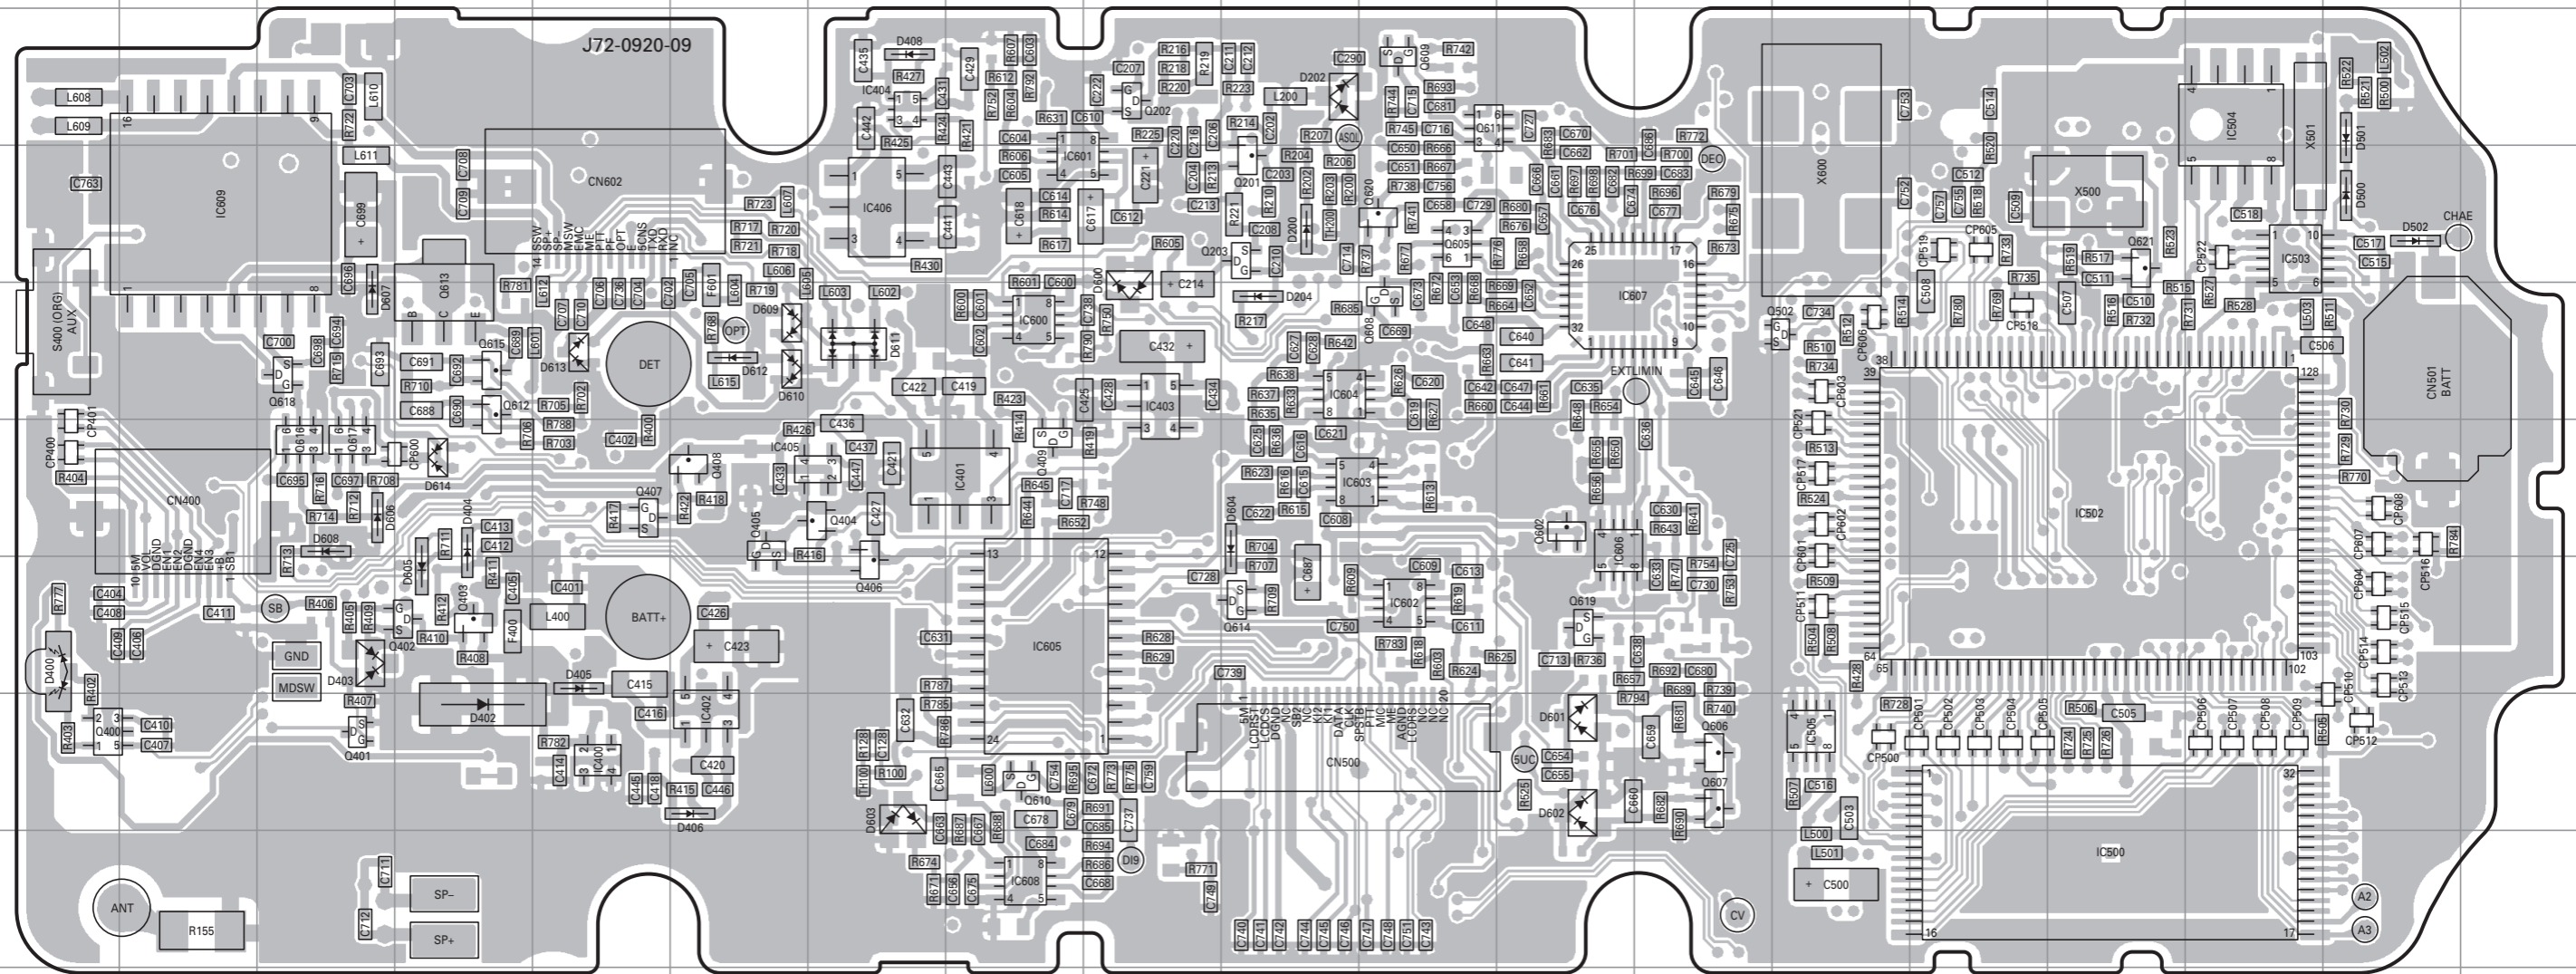


Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC400	8E	IC602	7K	Q403	7D	Q610	8H	D204	5J	D603	8G
IC401	6H	IC603	6J	Q404	6G	Q611	3K	D400	7A	D604	6J
IC402	8F	IC604	5J	Q405	6F	Q612	5D	D402	8D	D605	7D
IC403	5I	IC605	7H	Q406	7G	Q613	5D	D403	7C	D606	6C
IC404	3G	IC606	6L	Q407	6E	Q614	7J	D404	6D	D607	5C
IC405	6G	IC607	5L	Q408	6F	Q615	5D	D405	7E	D608	6C
IC406	4G	IC608	9H	Q409	6H	Q616	6C	D406	8F	D609	5F
IC500	9P	IC609	4B	Q502	5N	Q617	6C	D408	3G	D610	5F
IC502	6P	Q201	4J	Q602	6L	Q618	5C	D500	4R	D611	5G
IC503	4Q	Q202	3I	Q605	4K	Q619	7L	D501	3R	D612	5F
IC504	3Q	Q203	4J	Q606	8M	Q620	4K	D502	4R	D613	5E
IC505	8N	Q400	8A	Q607	8M	Q621	4P	D600	5I	D614	6D
IC600	5H	Q401	8C	Q608	5K	D200	4J	D601	8L		
IC601	4H	Q402	7D	Q609	3K	D202	3J	D602	8L		

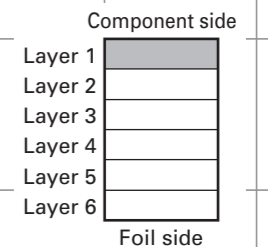

TK-3180 PC BOARD

TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4
Foil side view (J72-0920-09)

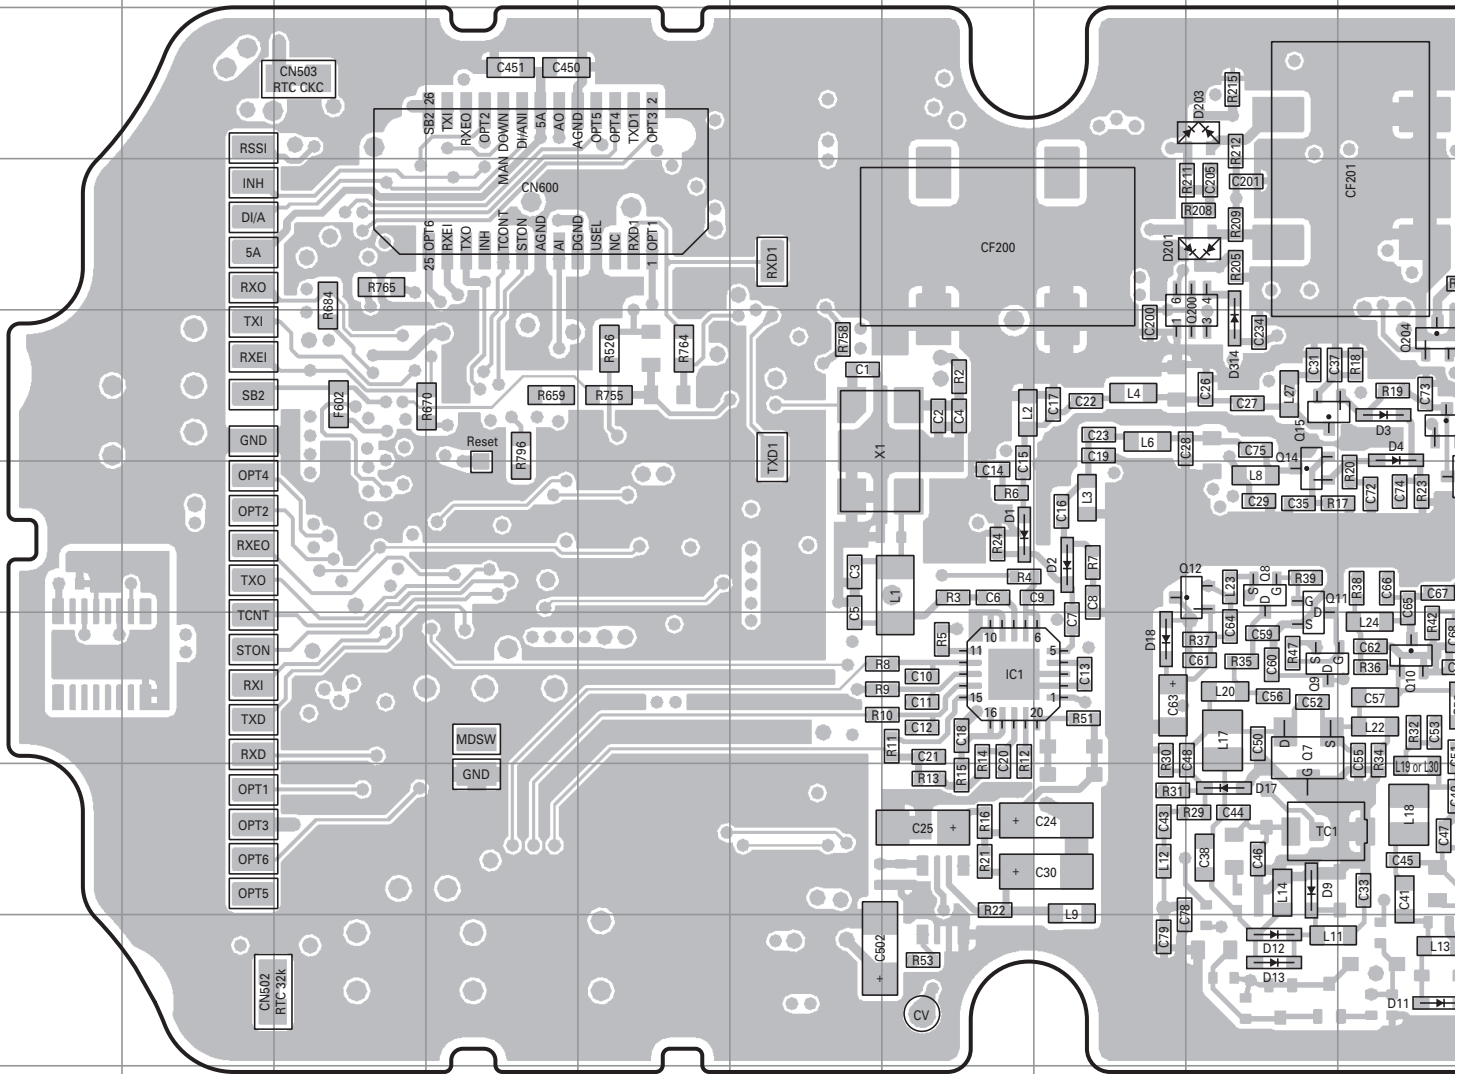


Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC1	7G	Q11	6I	Q106	5O	Q624	3Q	D13	9I	D205	6L
IC100	6P	Q12	6I	Q107	6P	D1	6G	D17	8I	D206	4N
IC200	3K	Q13	6J	Q108	5O	D2	6H	D18	7H	D207	3O
Q1	6J	Q14	6I	Q200	5I	D3	5J	D100	6L	D208	3O
Q2	5J	Q15	5I	Q204	5J	D4	5J	D103	5P	D209	5Q
Q6	8K	Q100	7L	Q205	4L	D6	9K	D106	8P	D210	6Q
Q7	7I	Q101	8K	Q206	5N	D7	9J	D107	8P	D212	6Q
Q8	6I	Q102	7M	Q207	4P	D9	8I	D108	4O	D213	7Q
Q9	7I	Q104	4P	Q622	3Q	D11	9J	D201	4I	D214	7Q
Q10	7J	Q105	8M	Q623	3M	D12	9I	D203	3I	D314	5I

TK-3180 PC BOARD


PC BOARD TK-3180

TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4
Foil side view (J72-0920-09)

TX-RX UNIT (X57-6940-XX) -10 : K,K3 -11 : K2,K4
Foil side view (J72-0920-09)

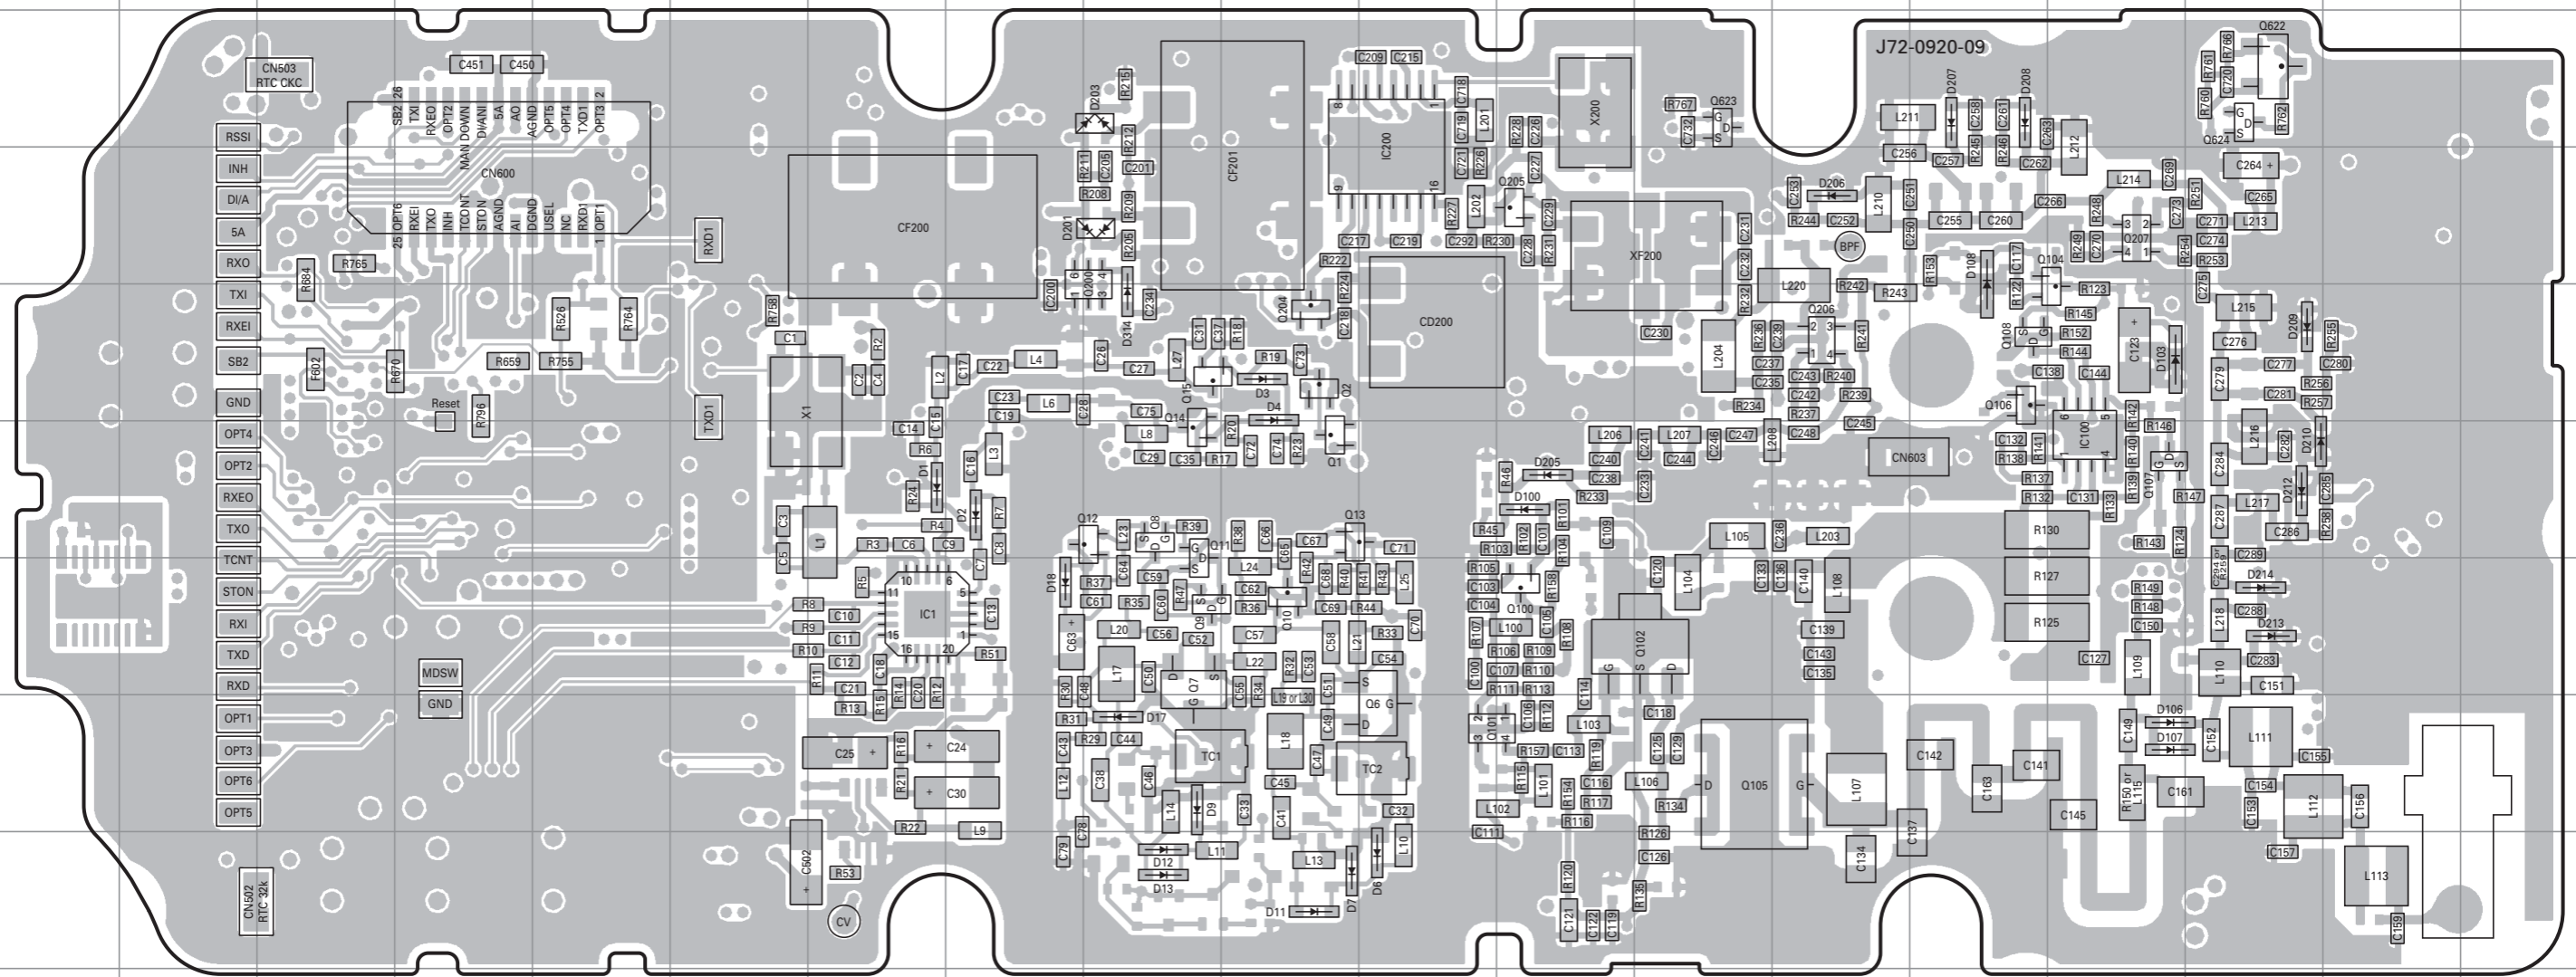


Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address	Ref. No.	Address
IC1	7G	Q11	6I	Q106	5O	Q624	3Q	D13	9I	D205	6L
IC100	6P	Q12	6I	Q107	6P	D1	6G	D17	8I	D206	4N
IC200	3K	Q13	6J	Q108	5O	D2	6H	D18	7H	D207	3O
Q1	6J	Q14	6I	Q200	5I	D3	5J	D100	6L	D208	3O
Q2	5J	Q15	5I	Q204	5J	D4	5J	D103	5P	D209	5Q
Q6	8K	Q100	7L	Q205	4L	D6	9K	D106	8P	D210	6Q
Q7	7I	Q101	8K	Q206	5N	D7	9J	D107	8P	D212	6Q
Q8	6I	Q102	7M	Q207	4P	D9	8I	D108	4O	D213	7Q
Q9	7I	Q104	4P	Q622	3Q	D11	9J	D201	4I	D214	7Q
Q10	7J	Q105	8M	Q623	3M	D12	9I	D203	3I	D314	5I

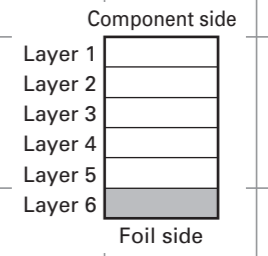

TK-3180 SCHEMATIC DIAGRAM


LCD ASSY
(B38-0900-05)

DISPLAY UNIT
(X54-3470-XX)

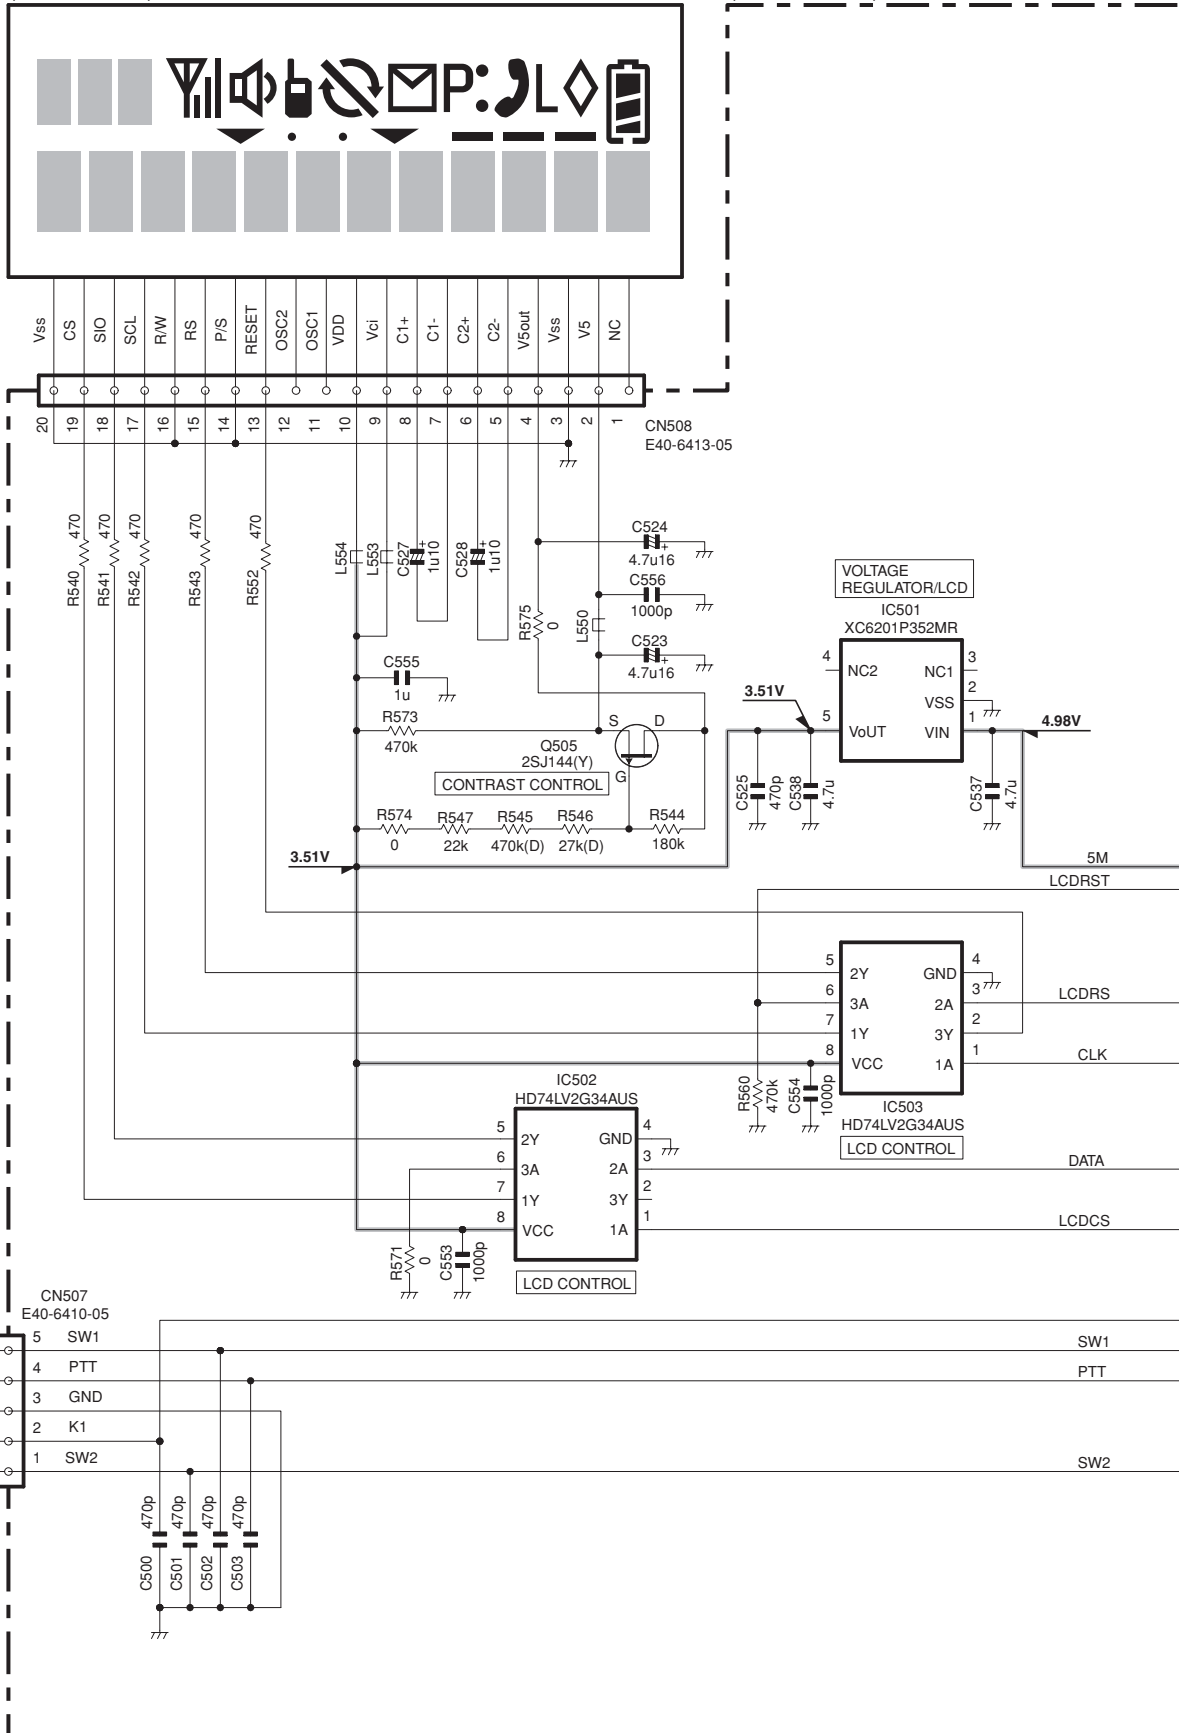

SIDE KEY SECTION


CN507
E40-6410-05

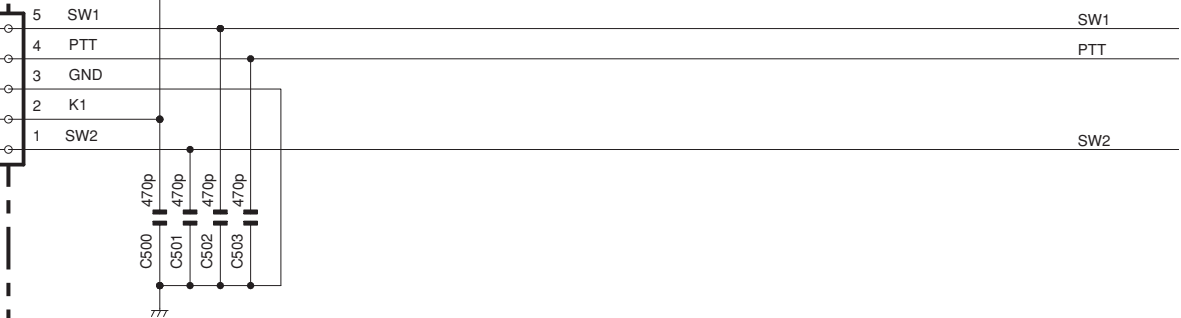

Note : The components marked with a dot (•) are parts of layer 1.

SCHEMATIC DIAGRAM TK-3180


DISPLAY UNIT (X54-3470-XX)

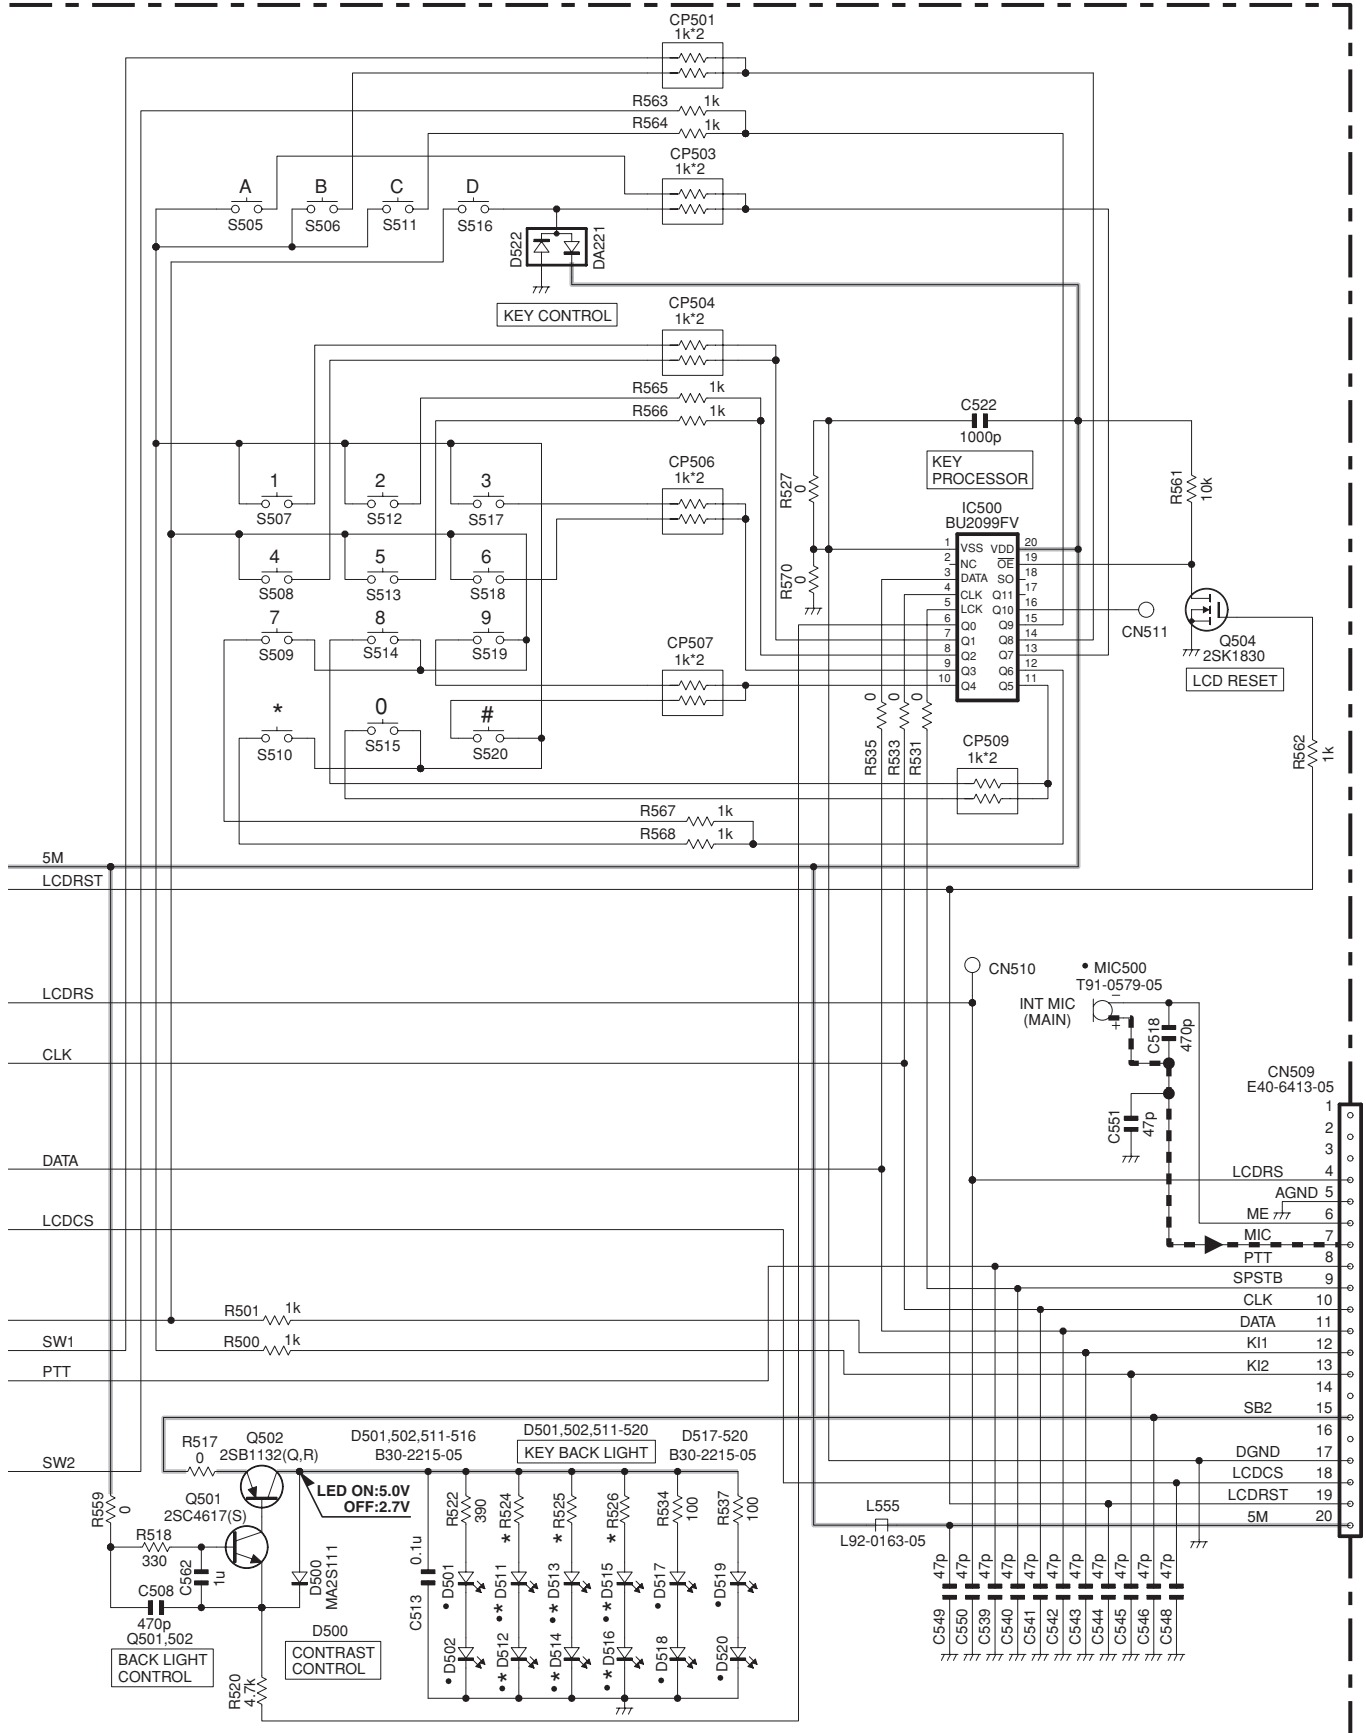

X54-3470-XX	D511	D512	D513	D514	D515	D516	R524	R525	R526
-10	K,K2	NO	NO	NO	NO	NO	NO	NO	NO
-11	K3,K4	B30-2215-05	B30-2215-05	B30-2215-05	B30-2215-05	B30-2215-05	B30-2215-05	390	390


LCD ASSY
(B38-0900-05)

DISPLAY UNIT
(X54-3470-XX)

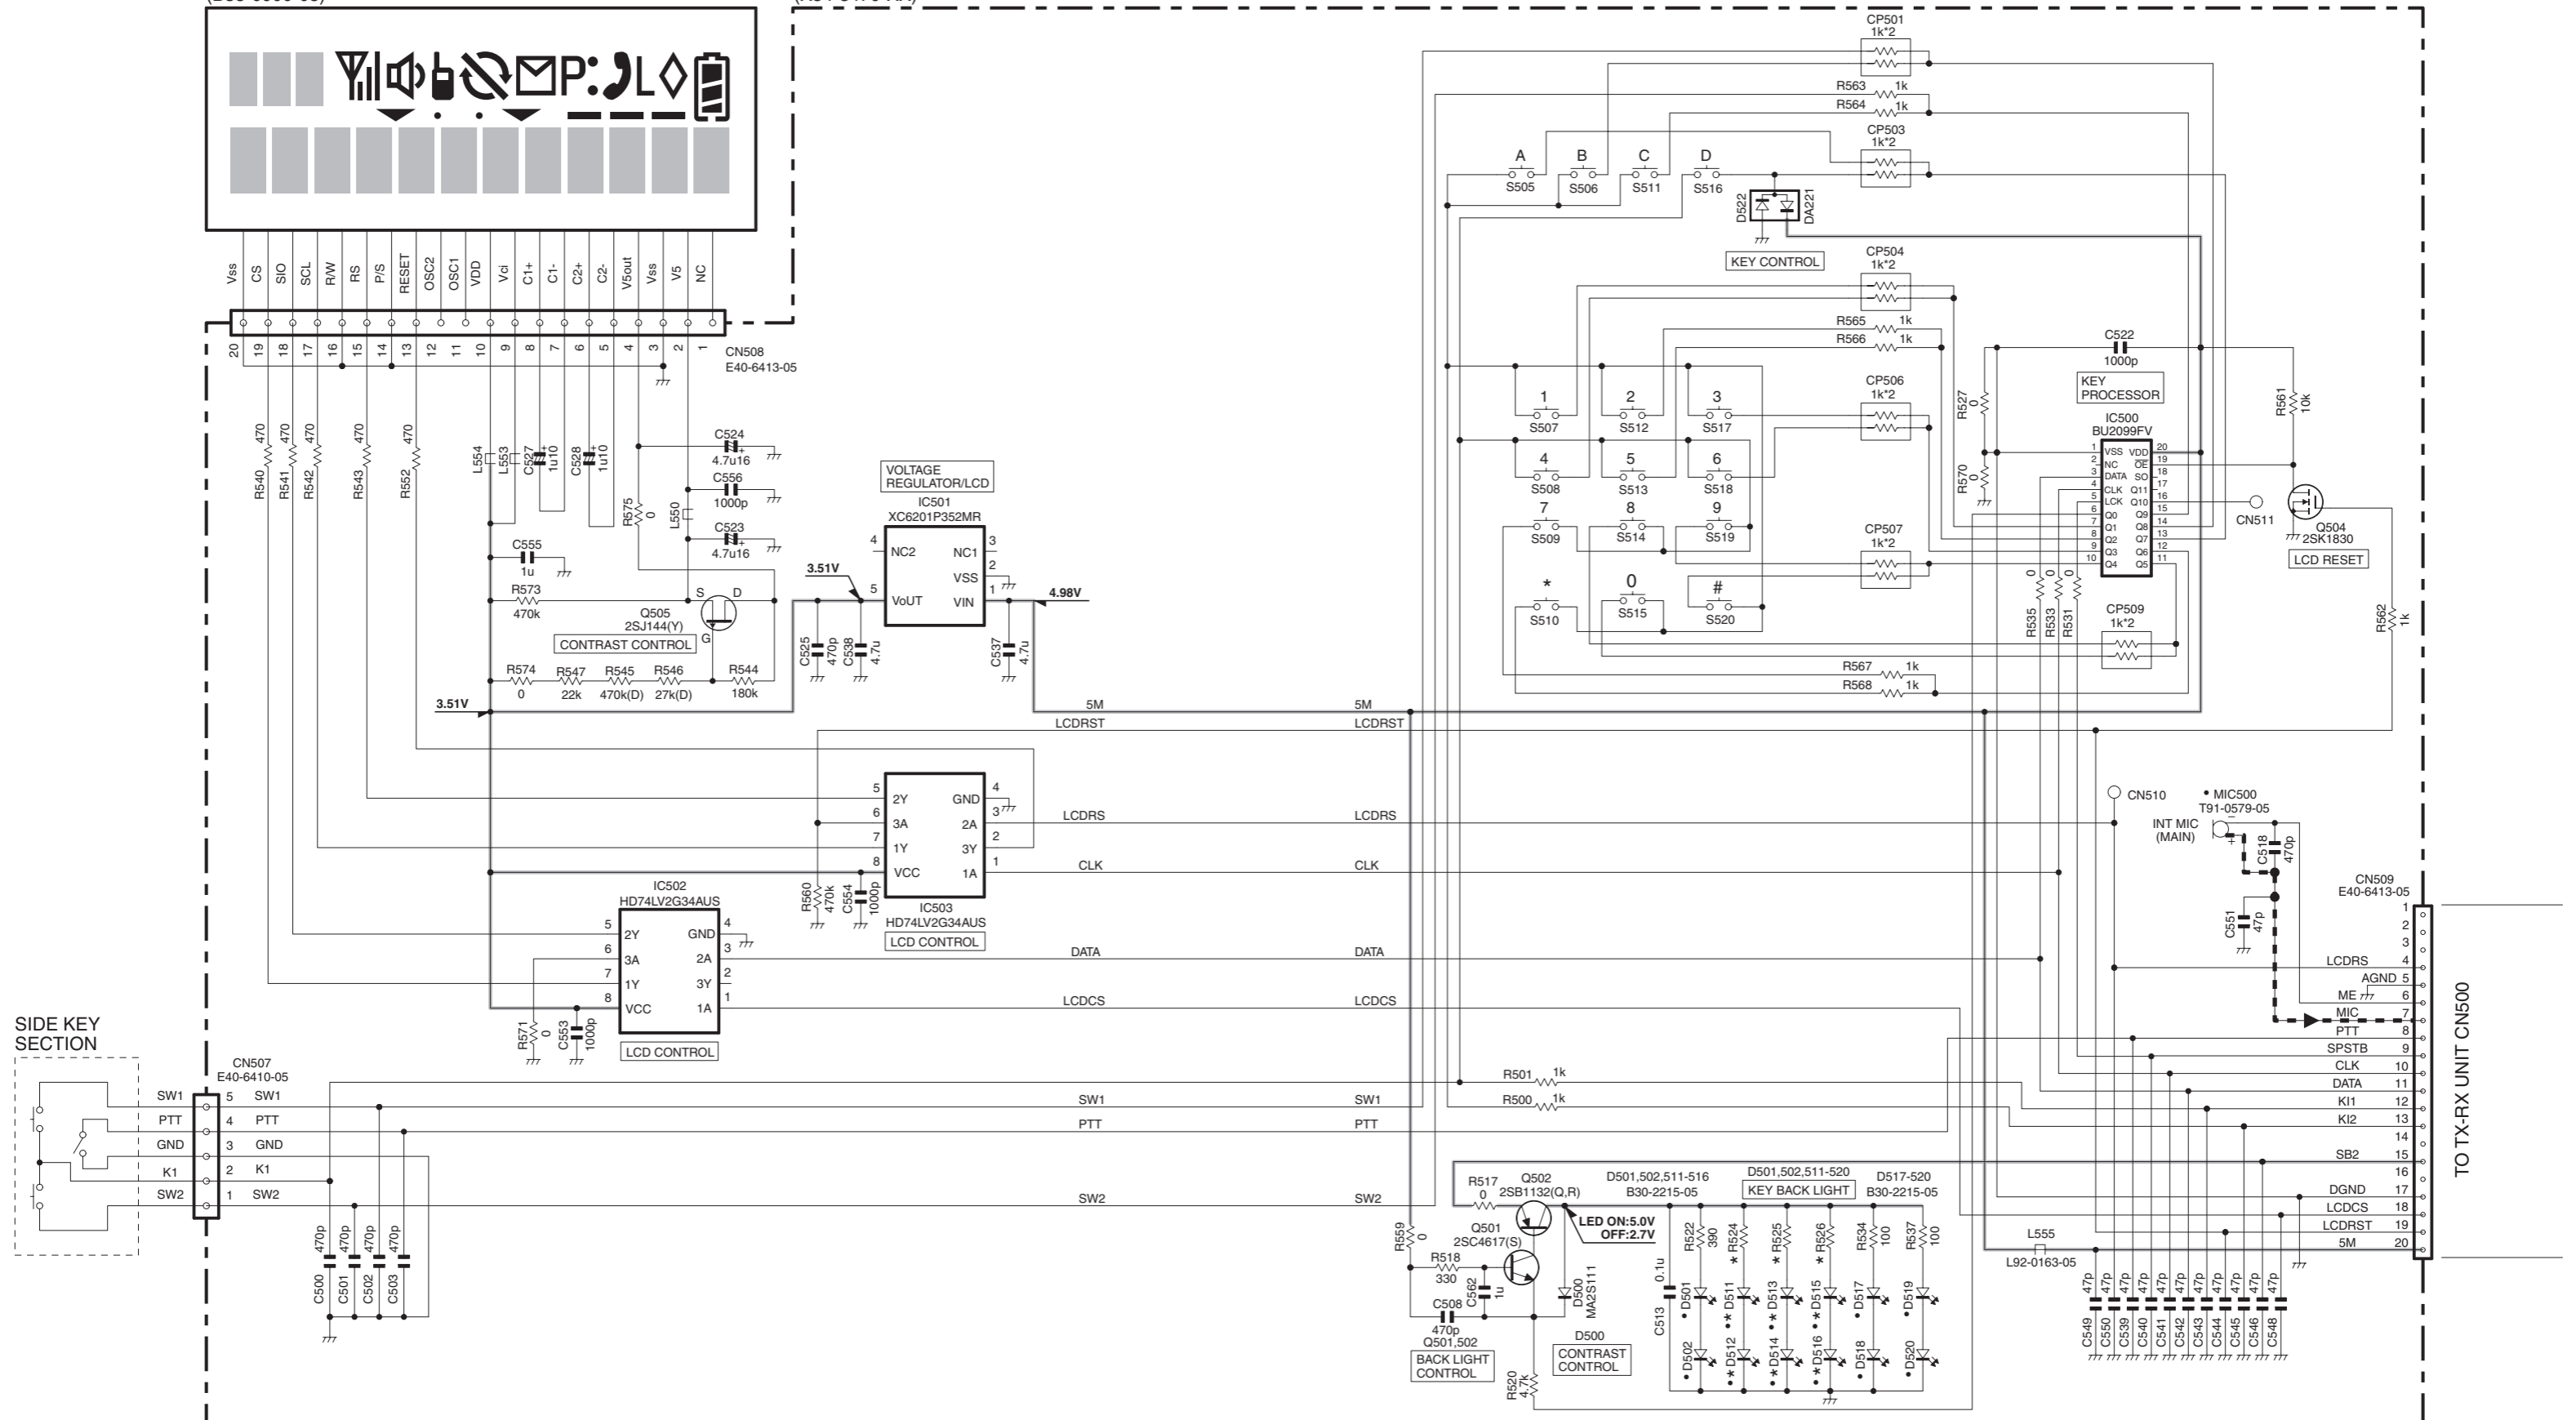

X54-3470-XX	D511	D512	D513	D514	D515	D516	R524	R525	R526
-10	K,K2	NO	NO	NO	NO	NO	NO	NO	NO
-11	K3,K4	B30-2215-05	B30-2215-05	B30-2215-05	B30-2215-05	B30-2215-05	B30-2215-05	390	390


TK-3180 SCHEMATIC DIAGRAM

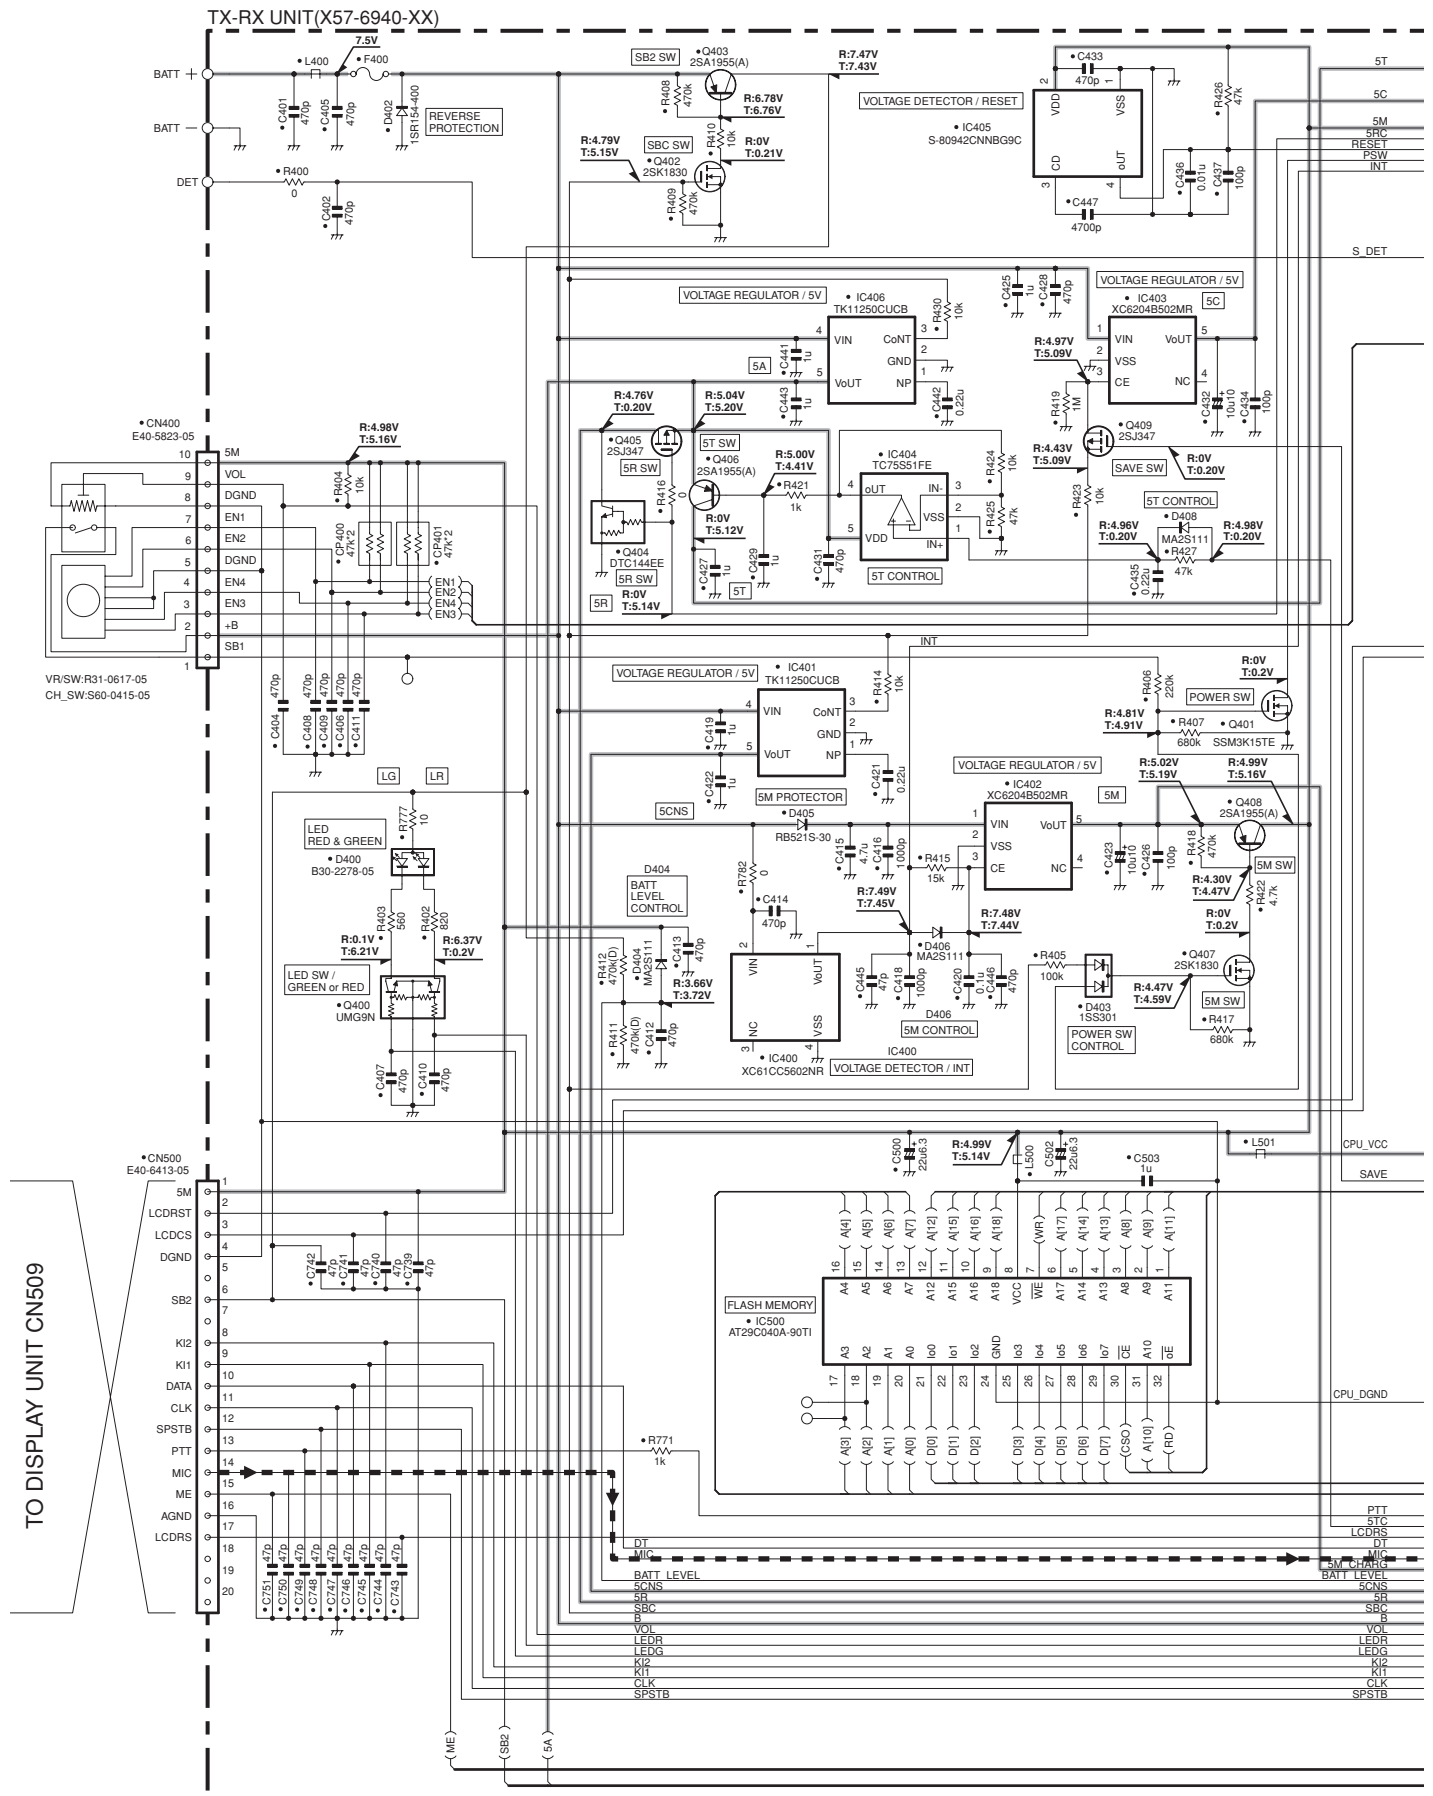

Note : The components marked with a dot (•) are parts of layer 1.


TK-3180 SCHEMATIC DIAGRAM

TX-RX UNIT (X57-6940-XX)

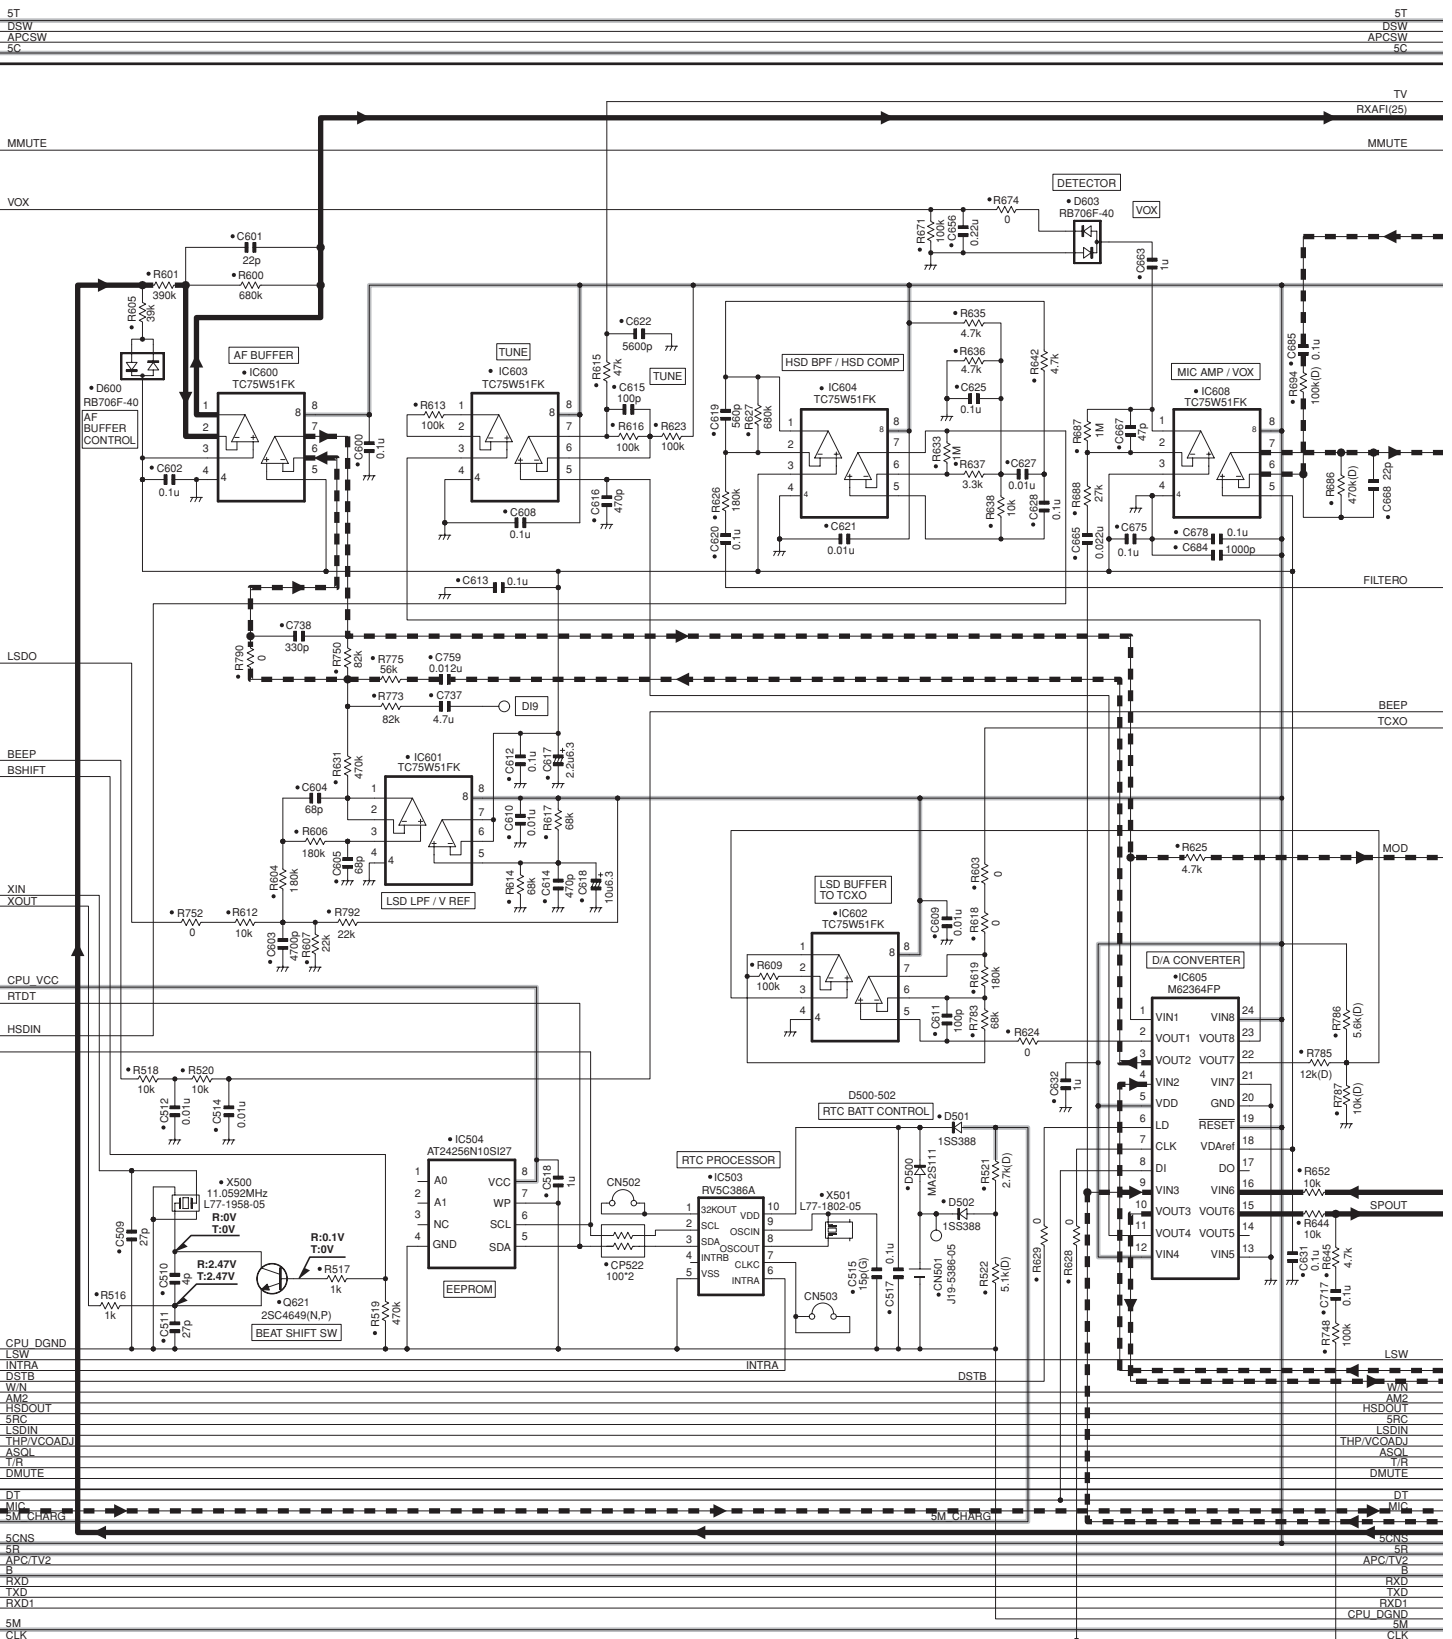


SCHEMATIC DIAGRAM TK-3180

TX-RX UNIT (X57-6940-XX)

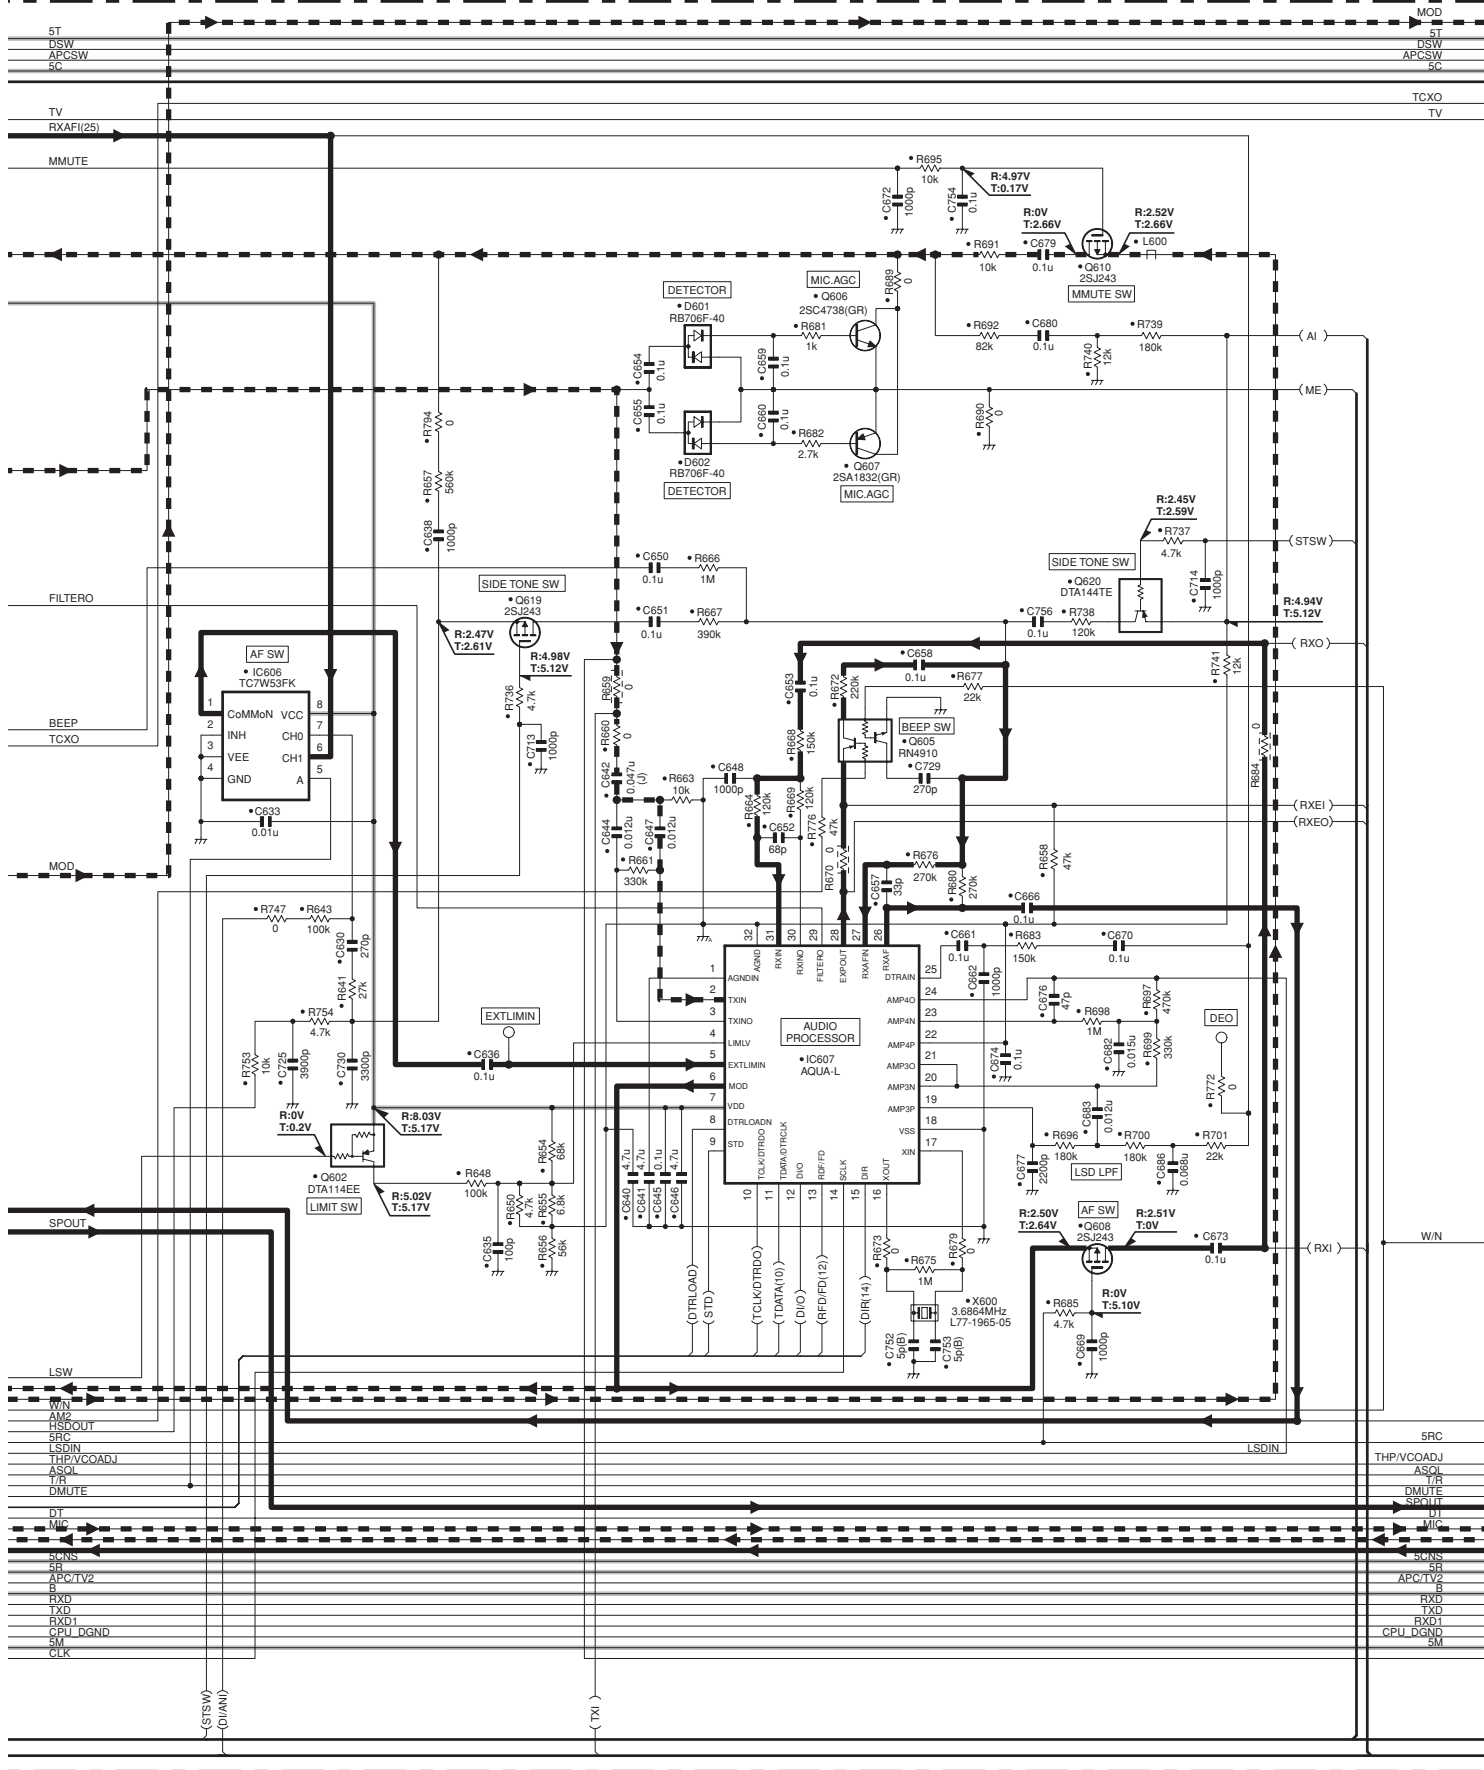

TK-3180 SCHEMATIC DIAGRAM


TX-RX UNIT (X57-6940-XX)

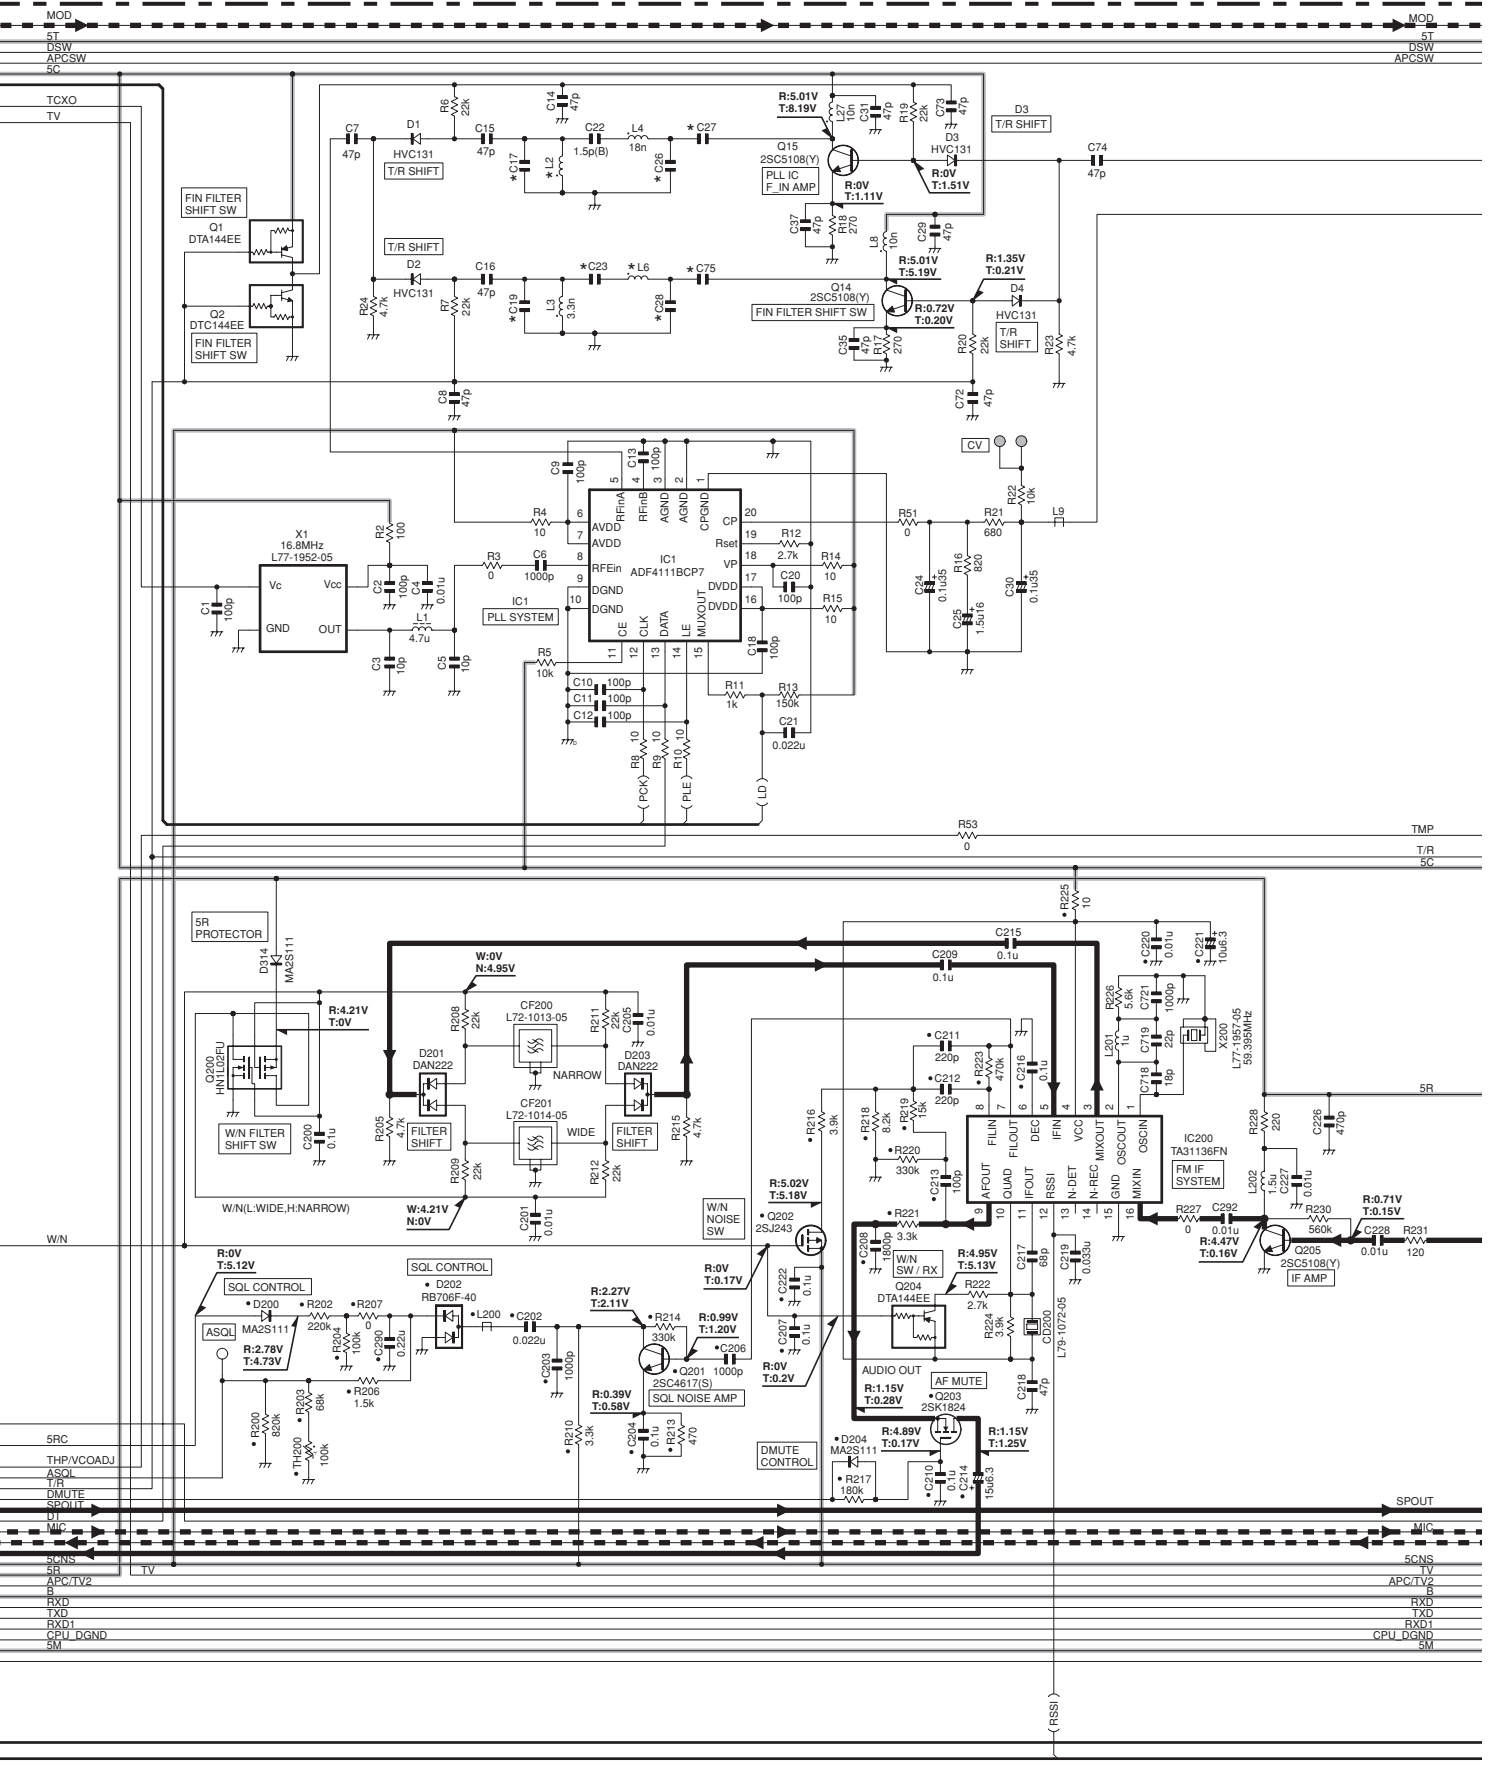

X57-6940-XX	C17	C19	C23	C26	C27	C28	C75	L2	L6	
-10	K,K2	8p(B)	9p(B)	3p(B)	3p(B)	2p(B)	5p(B)	3p(B)	2.7n	18n
-11	K3,K4	12p(G)	10p(B)	2p(B)	6p(B)	2.5p(B)	9p(B)	4p(B)	1.8n	22n

SCHEMATIC DIAGRAM TK-3180

TX-RX UNIT (X57-6940-XX)

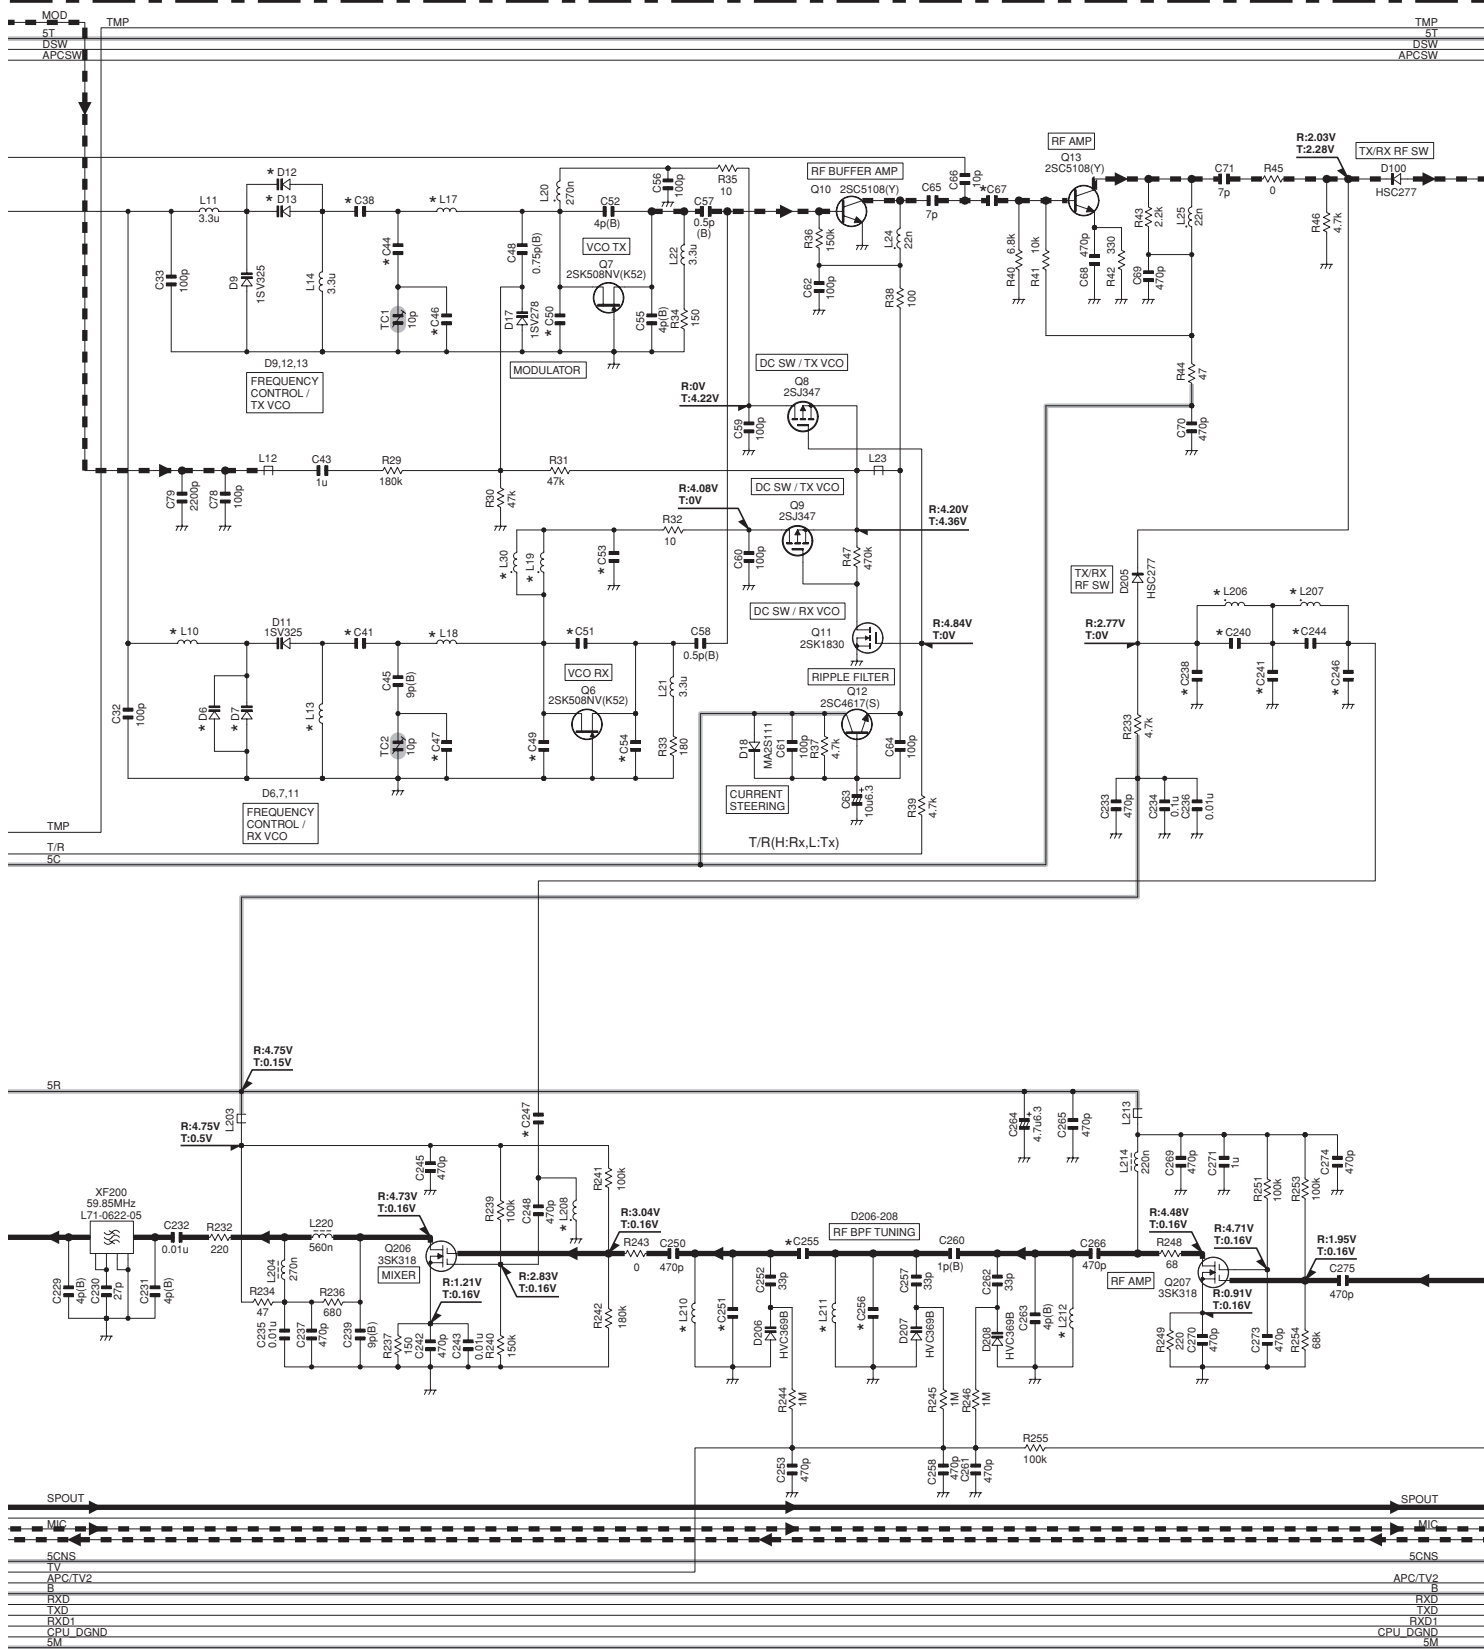


X57-6940-XX	C38	C41	C44	C46	C47	C49	C50	C51	C53	C54	C67	C238	C240	C241	C244	C246	C247	C251	C255	C256
-10	K.K2	56p	82p	13p	4p(B)	2p(B)	2p(B)	5p(B)	100p	6p(B)	33p	6p	2p(B)	10p	2p(B)	10p	4p(B)	3.5p(B)	0.75p(B)	3.5p(B)
-11	K3.K4	82p	120p	15p	3p(B)	1p(B)	2.5p(B)	3p(B)	7p(B)	33p	7p(B)	10p(C)	10p	4p(B)	12p(G)	5p(B)	4p(B)	1p(B)	1p(B)	4p(B)

X57-6940-XX	L10	L13	L17	L18	L19	L30	L206	L207	L208	L210	L211	L212	D6	D7	D12	D13	
-10	K.K2	1.8u	1.8u	15n	22n	270n	NO	18n	18n	22n	8.2n	8.2n	8.2n	NO	1SV325	NO	1SV325
-11	K3.K4	27u	27u	18n	27n	NO	220n	15n	15n	33n	10n	10n	10n	1SV325	NO	1SV325	NO

TK-3180 SCHEMATIC DIAGRAM


TX-RX UNIT (X57-6940-XX)

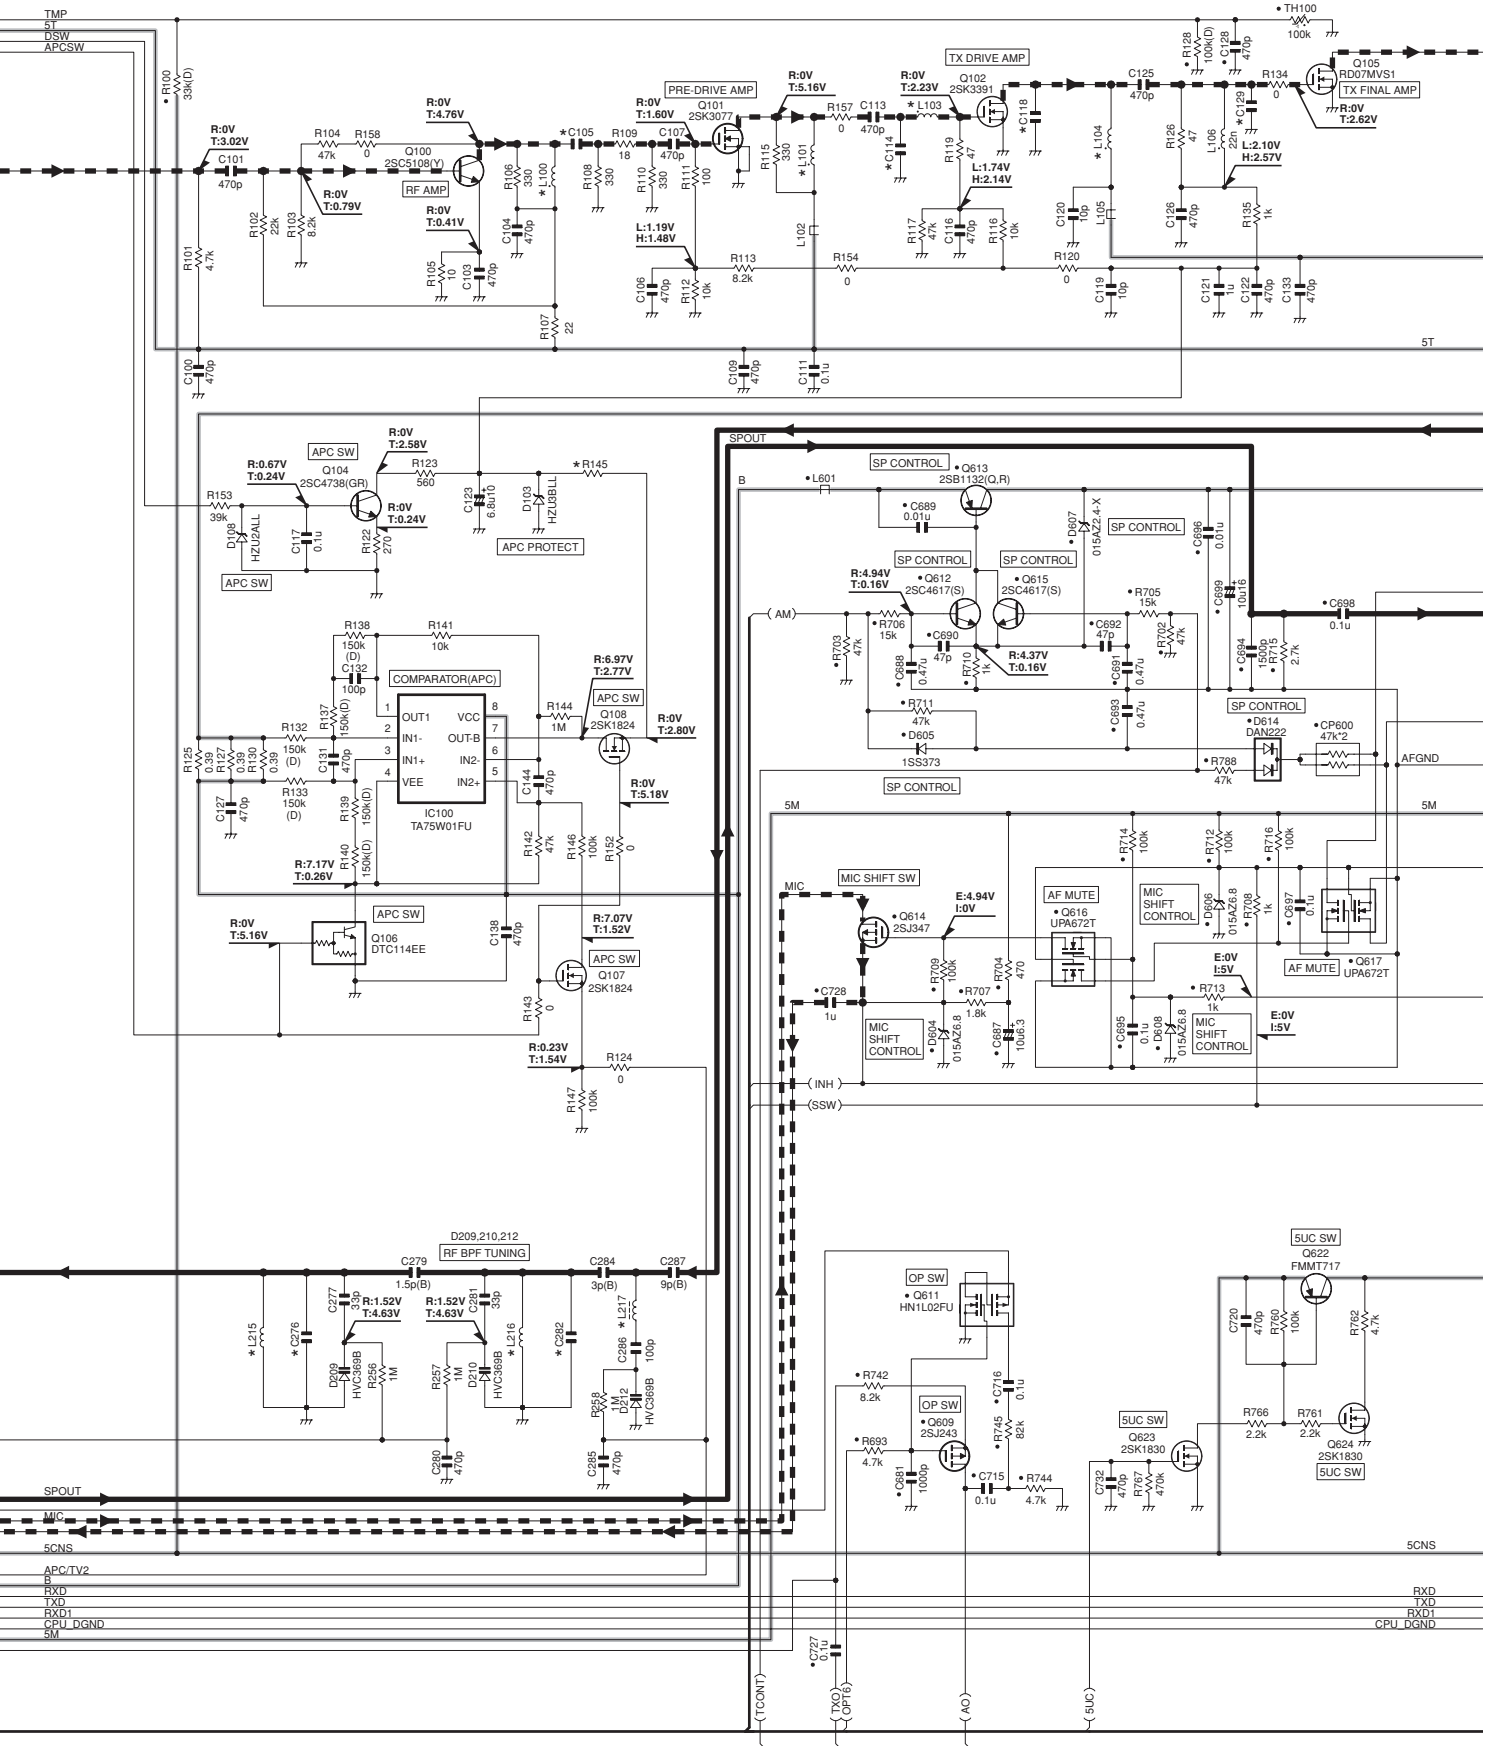


X57-6940-XX	C105	C114	C118	C129	C276	C282	L100	L101	L103	L104	L215	L216	L217	R145	
-10	K,K2	7p	10p	33p	18p	2.5p(B)	1p(B)	18n	18n	12n	15n	8.2n	8.2n	33n	1k
-11	K3,K4	6p	9p	22p	27p	3.5p(G)	1.5p(G)	33n	22n	15n	18n	10n	10n	39n	2.2k

SCHEMATIC DIAGRAM TK-3180

TX-RX UNIT (X57-6940-XX)

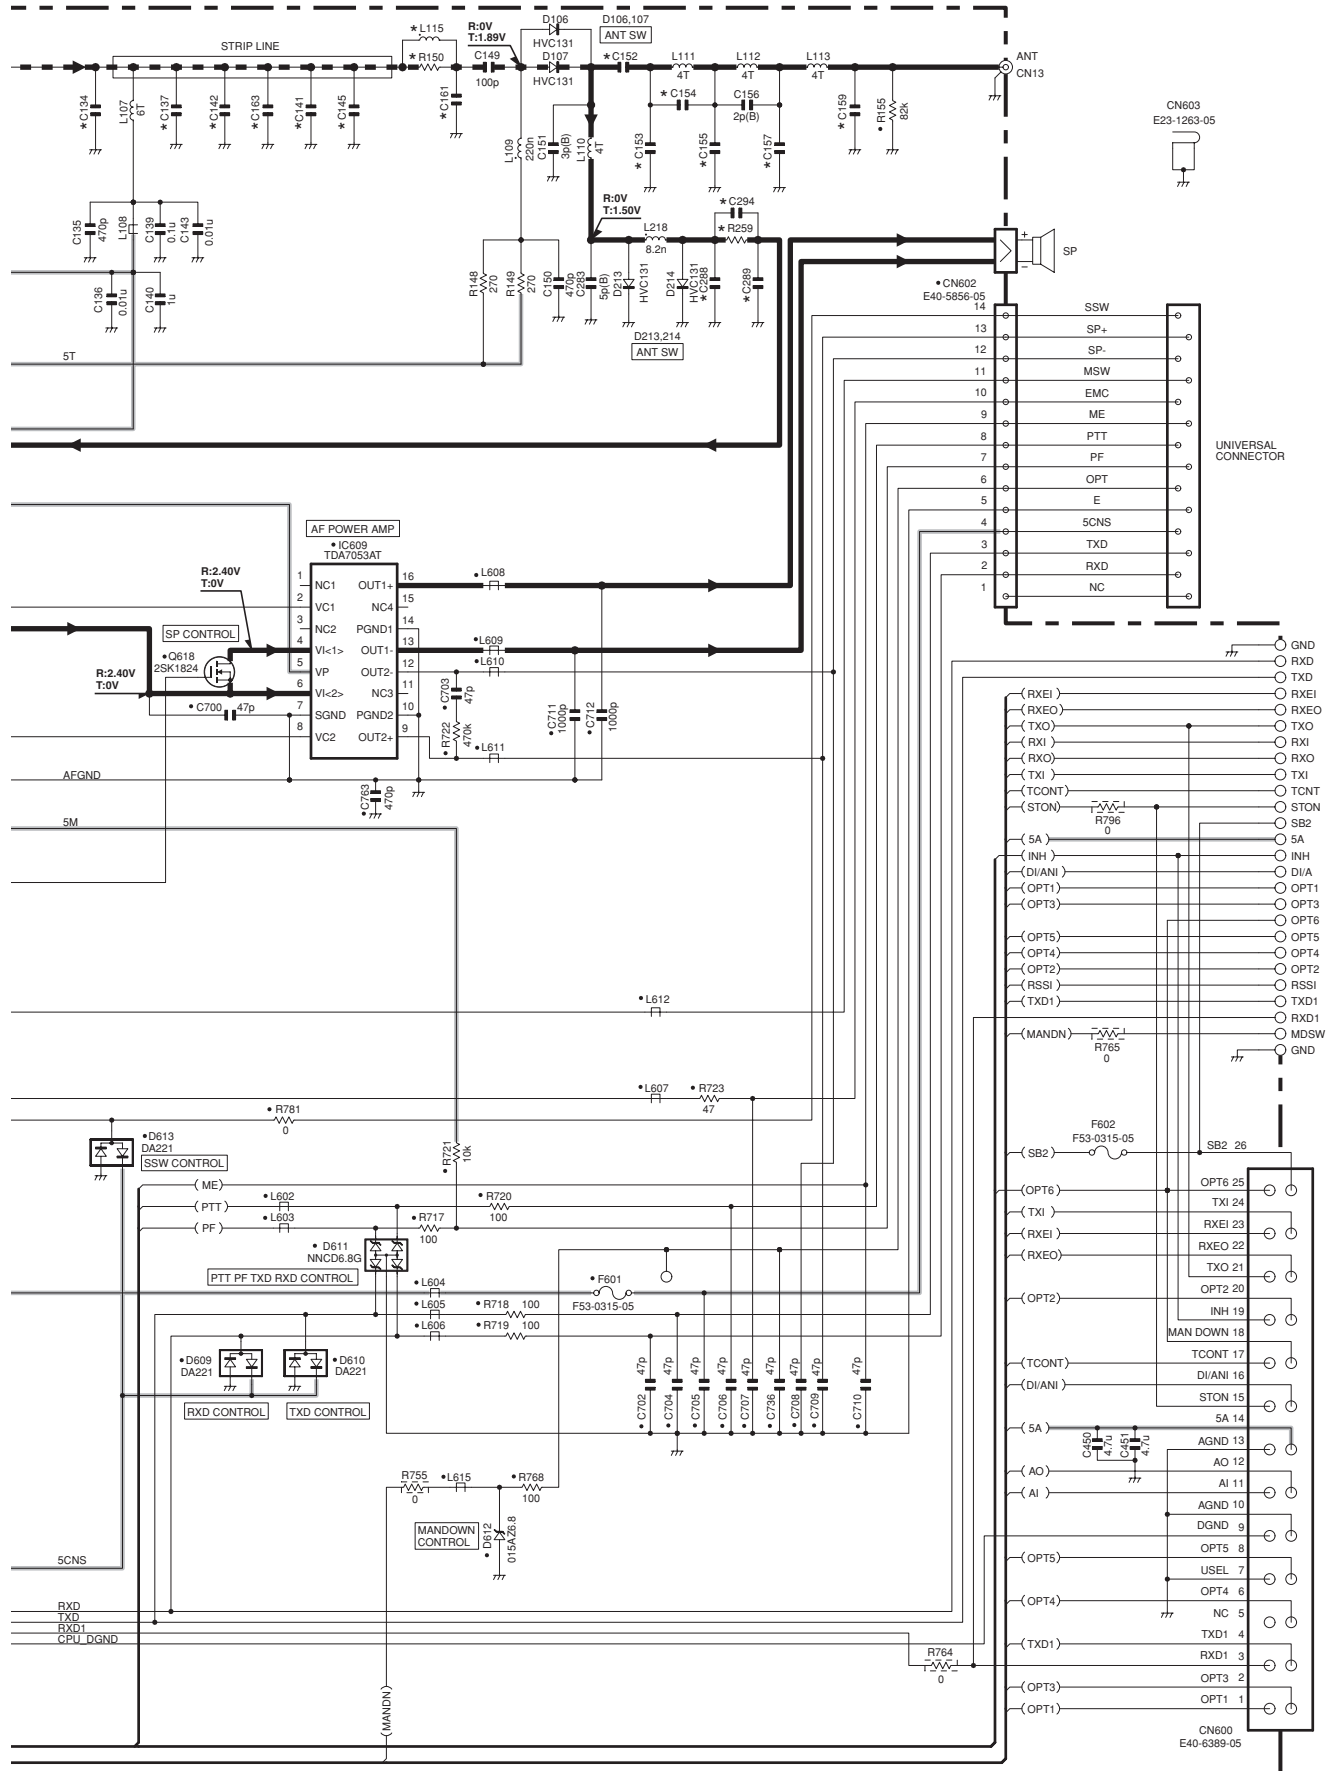

X57-6940-XX	C134	C137	C141	C142	C145	C152	C153	C154	C155	C157	C159	C161	C163	C288	C289	C294	L115	R150	R259	
-10	K,K2	NO	47p	18p	33p	NO	100p	5p(B)	1.5p(B)	6p(B)	7p(B)	4p(B)	7p	NO	NO	20p	NO	0	NO	
-11	K3,K4	51p	NO	NO	47p	16p	47p	7p(B)	2.5p(B)	10p(B)	11p	5p(B)	6p	24p	5p(B)	NO	NO	8.6n	NO	0




TO DISPLAY UNIT CNG09


TX-RX UNIT (X57-6940-XX)

X57-6940-XX	C01	C02	C03	C04	C05	C06	C07	C08	C09	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29	C30	C31	C32	C33	C34	C35	C36	C37	C38	C39	C40	C41	C42	C43	C44	C45	C46	C47	C48	C49	C50	C51	C52	C53	C54	C55	C56	C57	C58	C59	C60	C61	C62	C63	C64	C65	C66	C67	C68	C69	C70	C71	C72	C73	C74	C75	C76	C77	C78	C79	C80	C81	C82	C83	C84	C85	C86	C87	C88	C89	C90	C91	C92	C93	C94	C95	C96	C97	C98	C99	C100																																																													
-10	K42	R41	R42	R43	R44	R45	R46	R47	R48	R49	R50	R51	R52	R53	R54	R55	R56	R57	R58	R59	R60	R61	R62	R63	R64	R65	R66	R67	R68	R69	R70	R71	R72	R73	R74	R75	R76	R77	R78	R79	R80	R81	R82	R83	R84	R85	R86	R87	R88	R89	R90	R91	R92	R93	R94	R95	R96	R97	R98	R99	R100	R101	R102	R103	R104	R105	R106	R107	R108	R109	R110	R111	R112	R113	R114	R115	R116	R117	R118	R119	R120	R121	R122	R123	R124	R125	R126	R127	R128	R129	R130	R131	R132	R133	R134	R135	R136	R137	R138	R139	R140	R141	R142	R143	R144	R145	R146	R147	R148	R149	R150	R151	R152	R153	R154	R155	R156	R157	R158	R159	R160	R161	R162	R163	R164	R165	R166	R167	R168	R169	R170	R171	R172	R173	R174	R175	R176	R177	R178	R179	R180	R181	R182	R183	R184	R185	R186	R187	R188	R189	R190	R191	R192	R193	R194	R195	R196	R197	R198	R199	R200
X57-6940-XX	L11	L12	L13	L14	L15	L16	L17	L18	L19	L20	L21	L22	L23	L24	L25	L26	L27	L28	L29	L30	L31	L32	L33	L34	L35	L36	L37	L38	L39	L40	L41	L42	L43	L44	L45	L46	L47	L48	L49	L50	L51	L52	L53	L54	L55	L56	L57	L58	L59	L60	L61	L62	L63	L64	L65	L66	L67	L68	L69	L70	L71	L72	L73	L74	L75	L76	L77	L78	L79	L80	L81	L82	L83	L84	L85	L86	L87	L88	L89	L90	L91	L92	L93	L94	L95	L96	L97	L98	L99	L100																																																																							
-10	K42	R41	R42	R43	R44	R45	R46	R47	R48	R49	R50	R51	R52	R53	R54	R55	R56	R57	R58	R59	R60	R61	R62	R63	R64	R65	R66	R67	R68	R69	R70	R71	R72	R73	R74	R75	R76	R77	R78	R79	R80	R81	R82	R83	R84	R85	R86	R87	R88	R89	R90	R91	R92	R93	R94	R95	R96	R97	R98	R99	R100	R101	R102	R103	R104	R105	R106	R107	R108	R109	R110	R111	R112	R113	R114	R115	R116	R117	R118	R119	R120	R121	R122	R123	R124	R125	R126	R127	R128	R129	R130	R131	R132	R133	R134	R135	R136	R137	R138	R139	R140	R141	R142	R143	R144	R145	R146	R147	R148	R149	R150	R151	R152	R153	R154	R155	R156	R157	R158	R159	R160	R161	R162	R163	R164	R165	R166	R167	R168	R169	R170	R171	R172	R173	R174	R175	R176	R177	R178	R179	R180	R181	R182	R183	R184	R185	R186	R187	R188	R189	R190	R191	R192	R193	R194	R195	R196	R197	R198	R199	R200
X57-6940-XX	C101	C102	C103	C104	C105	C106	C107	C108	C109	C110	C111	C112	C113	C114	C115	C116	C117	C118	C119	C120	C121	C122	C123	C124	C125	C126	C127	C128	C129	C130	C131	C132	C133	C134	C135	C136	C137	C138	C139	C140	C141	C142	C143	C144	C145	C146	C147	C148	C149	C150	C151	C152	C153	C154	C155	C156	C157	C158	C159	C160	C161	C162	C163	C164	C165	C166	C167	C168	C169	C170	C171	C172	C173	C174	C175	C176	C177	C178	C179	C180	C181	C182	C183	C184	C185	C186	C187	C188	C189	C190	C191	C192	C193	C194	C195	C196	C197	C198	C199	C200																																																													
-10	K42	R41	R42	R43	R44	R45	R46	R47	R48	R49	R50	R51	R52	R53	R54	R55	R56	R57	R58	R59	R60	R61	R62	R63	R64	R65	R66	R67	R68	R69	R70	R71	R72	R73	R74	R75	R76	R77	R78	R79	R80	R81	R82	R83	R84	R85	R86	R87	R88	R89	R90	R91	R92	R93	R94	R95	R96	R97	R98	R99	R100	R101	R102	R103	R104	R105	R106	R107	R108	R109	R110	R111	R112	R113	R114	R115	R116	R117	R118	R119	R120	R121	R122	R123	R124	R125	R126	R127	R128	R129	R130	R131	R132	R133	R134	R135	R136	R137	R138	R139	R140	R141	R142	R143	R144	R145	R146	R147	R148	R149	R150	R151	R152	R153	R154	R155	R156	R157	R158	R159	R160	R161	R162	R163	R164	R165	R166	R167	R168	R169	R170	R171	R172	R173	R174	R175	R176	R177	R178	R179	R180	R181	R182	R183	R184	R185	R186	R187	R188	R189	R190	R191	R192	R193	R194	R195	R196	R197	R198	R199	R200
X57-6940-XX	C201	C202	C203	C204	C205	C206	C207	C208	C209	C210	C211	C212	C213	C214	C215	C216	C217	C218	C219	C220	C221	C222	C223	C224	C225	C226	C227	C228	C229	C230	C231	C232	C233	C234	C235	C236	C237	C238	C239	C240	C241	C242	C243	C244	C245	C246	C247	C248	C249	C250	C251	C252	C253	C254	C255	C256	C257	C258	C259	C260	C261	C262	C263	C264	C265	C266	C267	C268	C269	C270	C271	C272	C273	C274	C275	C276	C277	C278	C279	C280	C281	C282	C283	C284	C285	C286	C287	C288	C289	C290	C291	C292	C293	C294	C295	C296	C297	C298	C299	C300																																																													
-10	K42	R41	R42	R43	R44	R45	R46	R47	R48	R49	R50	R51	R52	R53	R54	R55	R56	R57	R58	R59	R60	R61	R62	R63	R64	R65	R66	R67	R68	R69	R70	R71	R72	R73	R74	R75	R76	R77	R78	R79	R80	R81	R82	R83	R84	R85	R86	R87	R88	R89	R90	R91	R92	R93	R94	R95	R96	R97	R98	R99	R100	R101	R102	R103	R104	R105	R106	R107	R108	R109	R110	R111	R112	R113	R114	R115	R116	R117	R118	R119	R120	R121	R122	R123	R124	R125	R126	R127	R128	R129	R130	R131	R132	R133	R134	R135	R136	R137	R138	R139	R140	R141	R142	R143	R144	R145	R146	R147	R148	R149	R150	R151	R152	R153	R154	R155	R156	R157	R158	R159	R160	R161	R162	R163	R164	R165	R166	R167	R168	R169	R170	R171	R172	R173	R174	R175	R176	R177	R178	R179	R180	R181	R182	R183	R184	R185	R186	R187	R188	R189	R190	R191	R192	R193	R194	R195	R196	R197	R198	R199	R200

BLOCK DIAGRAM

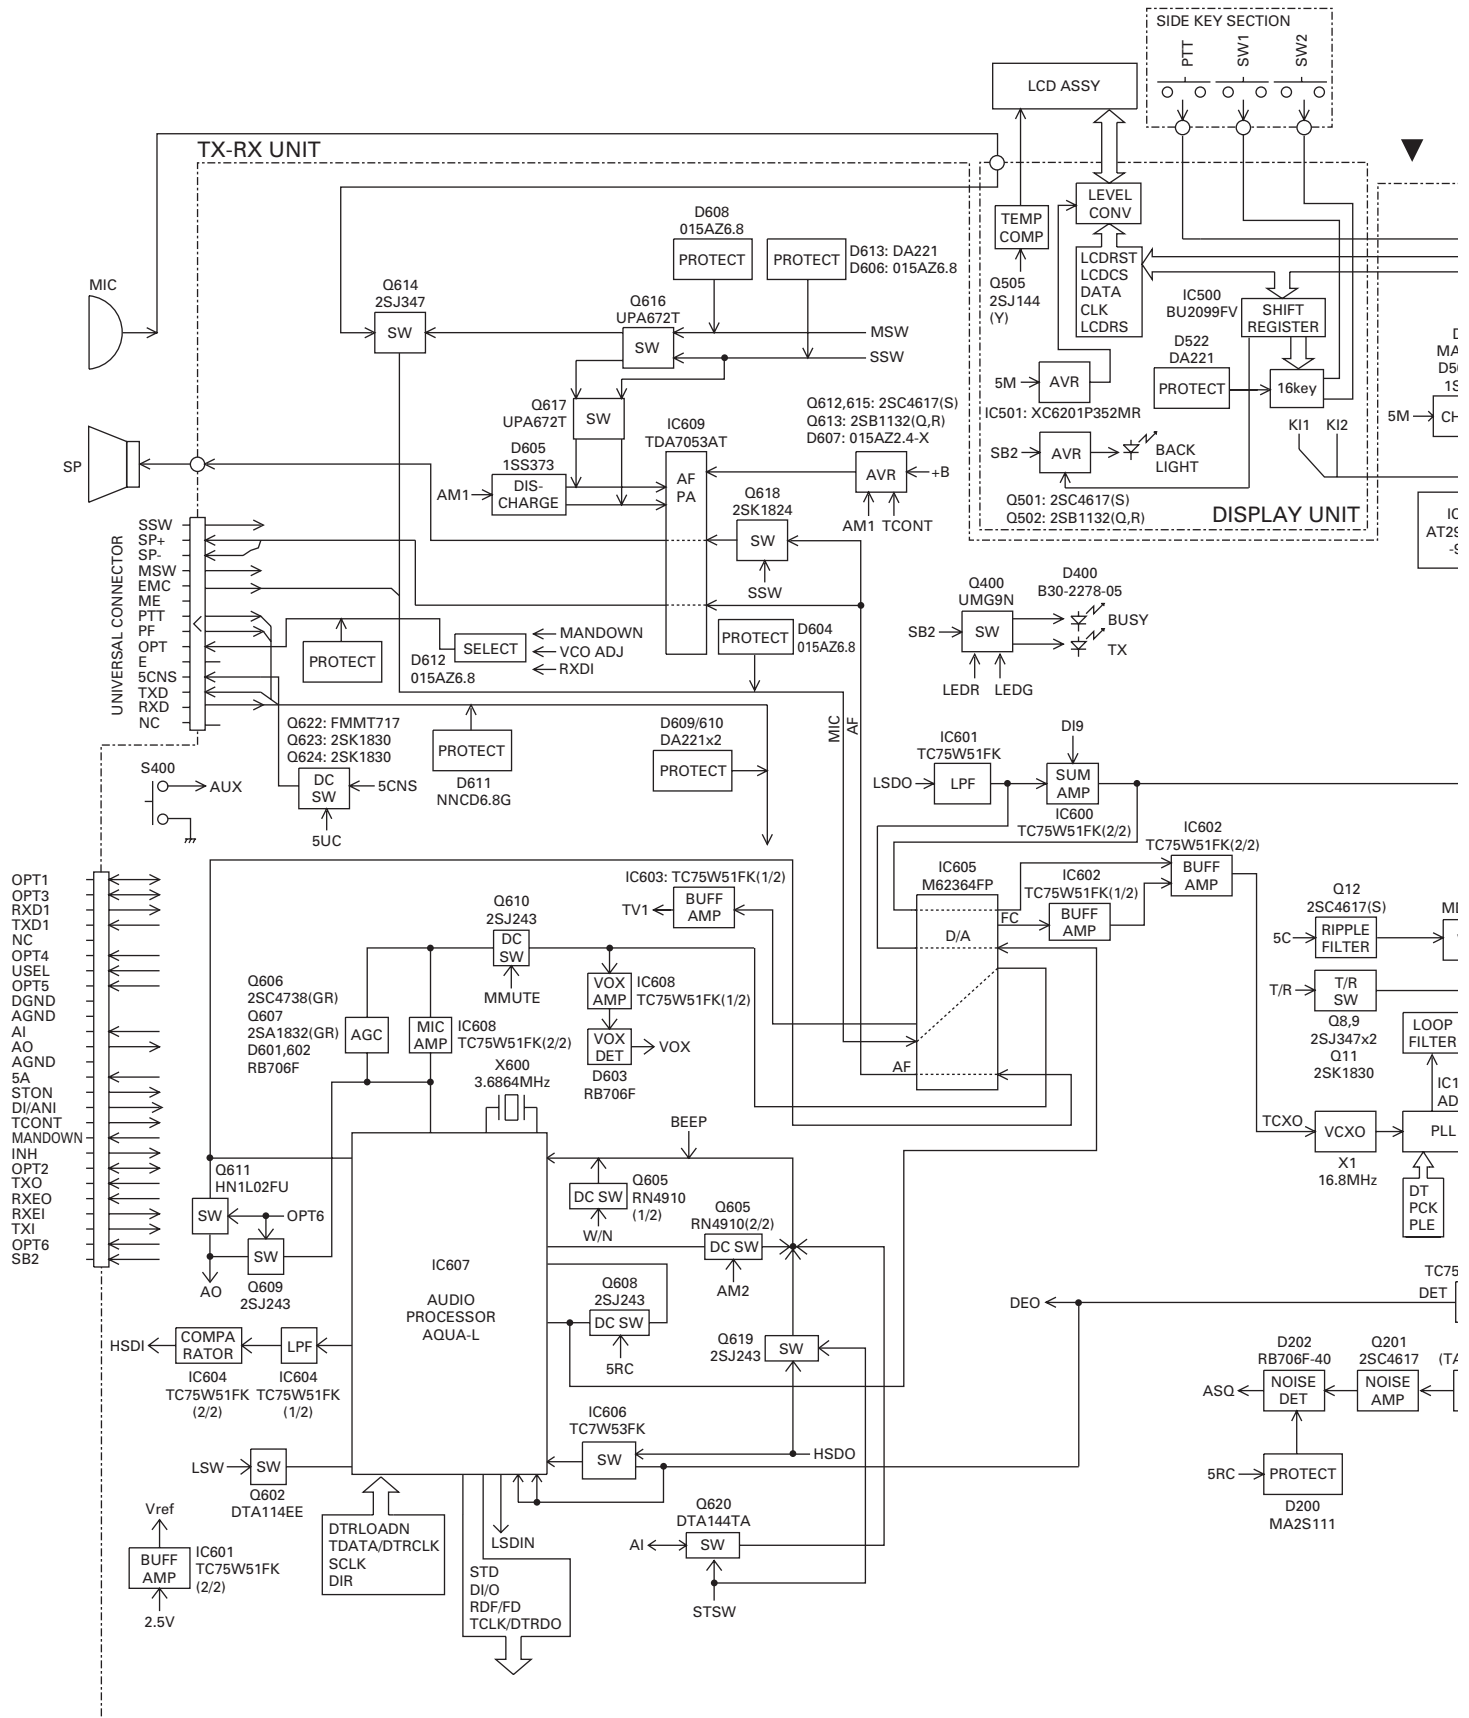


BLOCK DIAGRAM

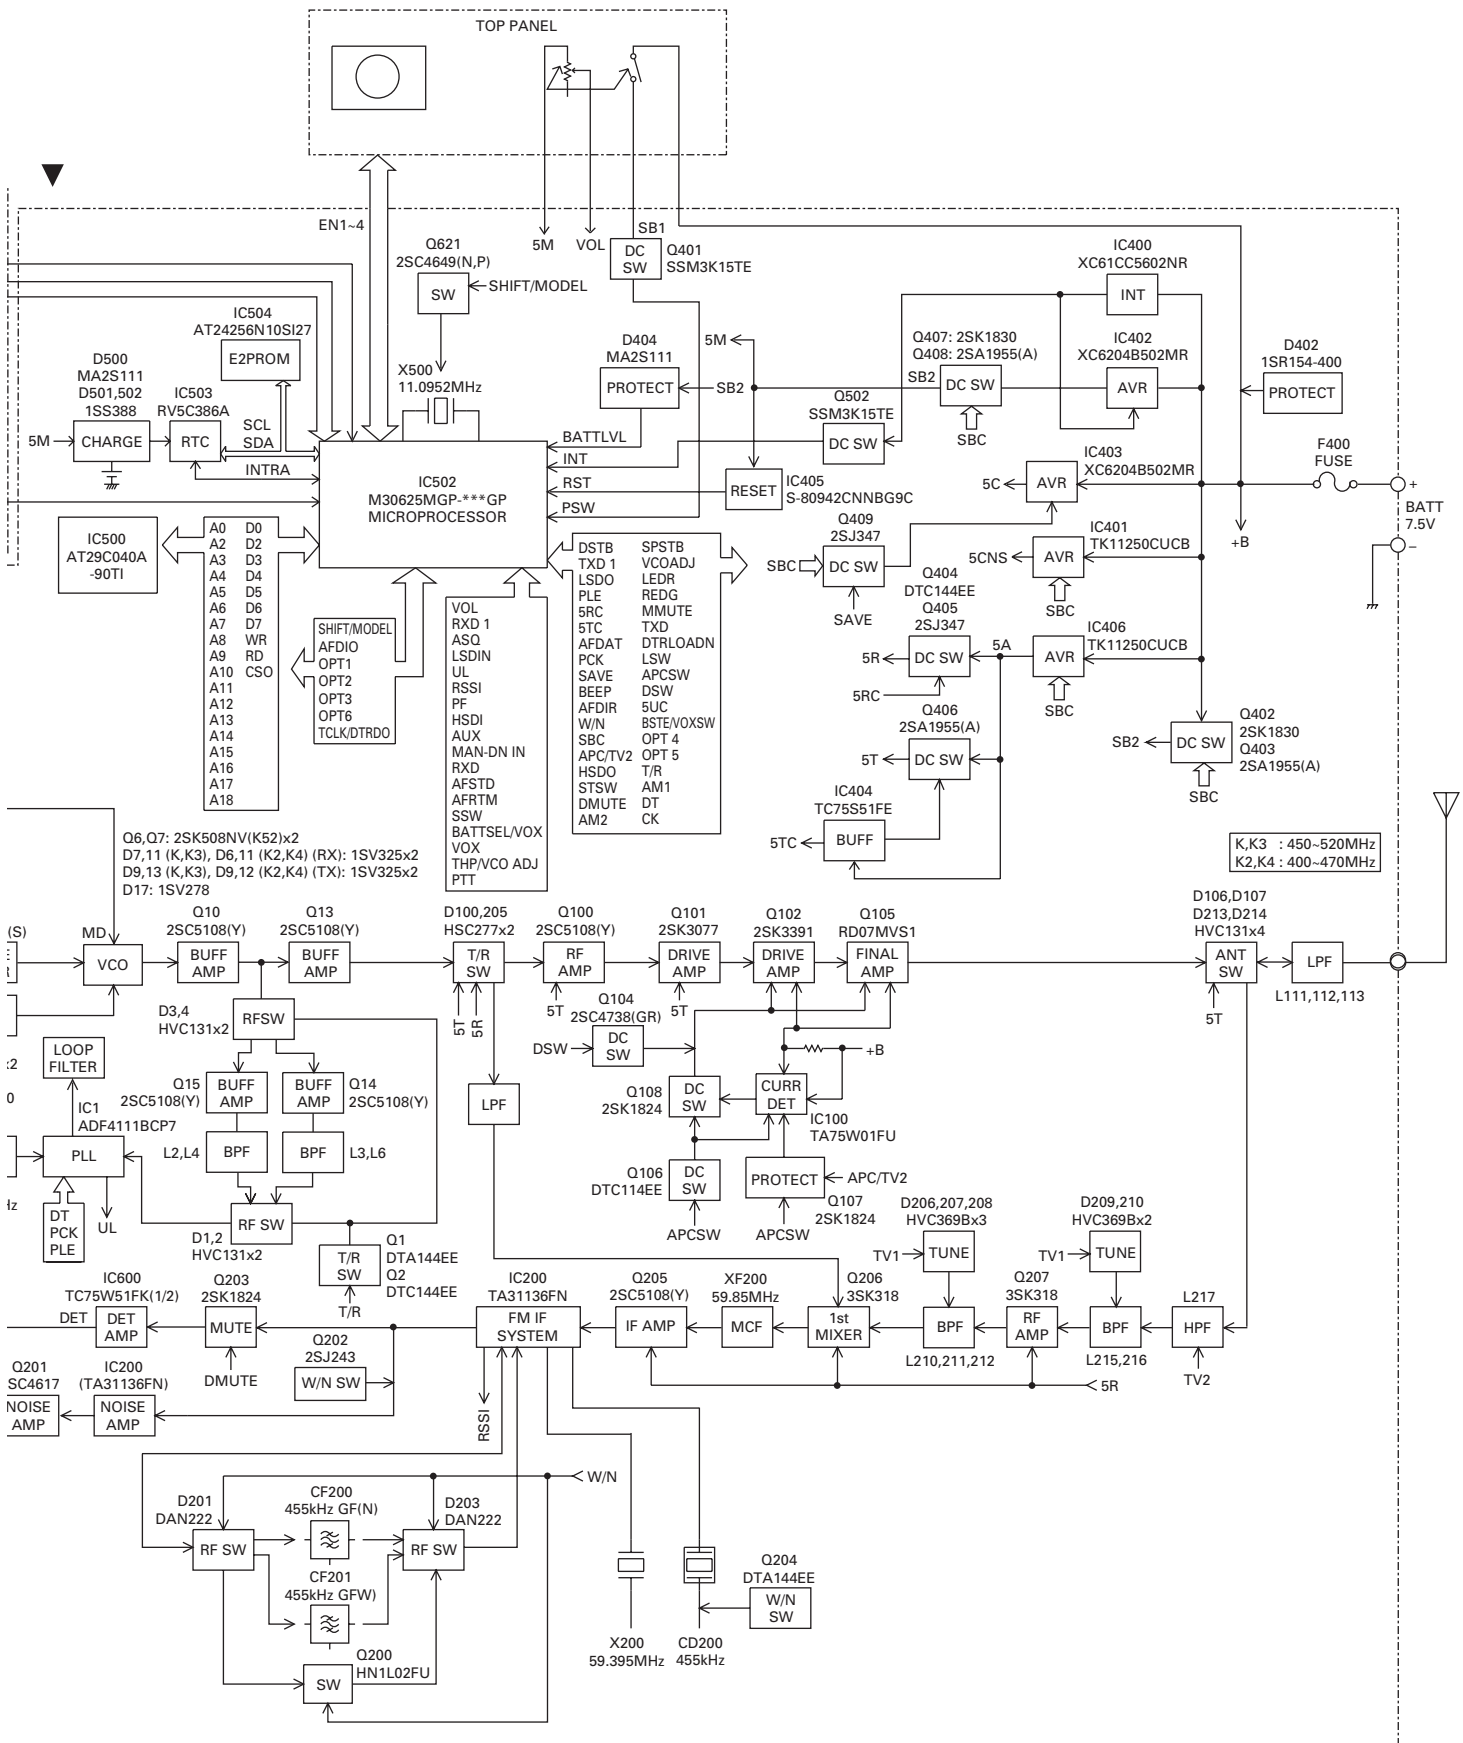


LEVEL DIAGRAM

Receiver Section

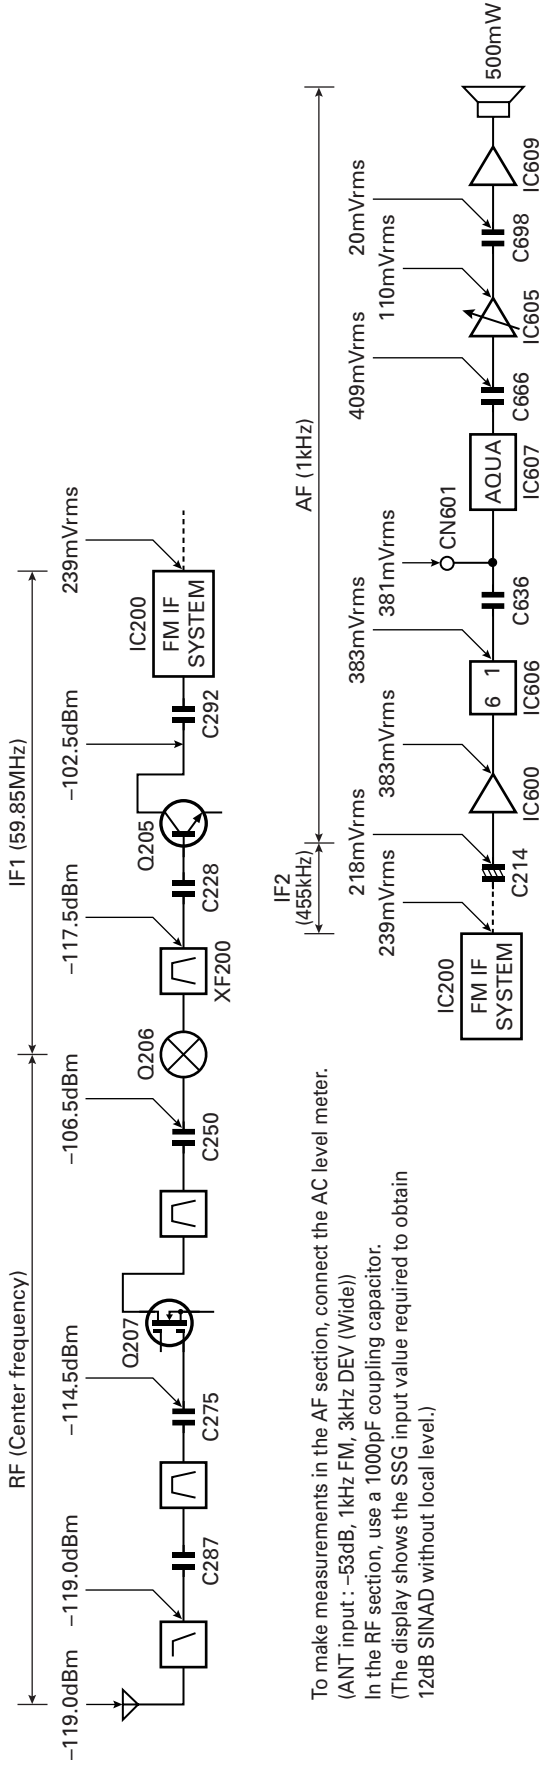

To make measurements in the AF section, connect the AC level meter.
 (ANT input : -53dB, 1kHz FM, 3kHz DEV (Wide))
 In the RF section, use a 1000pF coupling capacitor.
 (The display shows the SSG input value required to obtain 12dB SINAD without local level.)

Transmitter Section

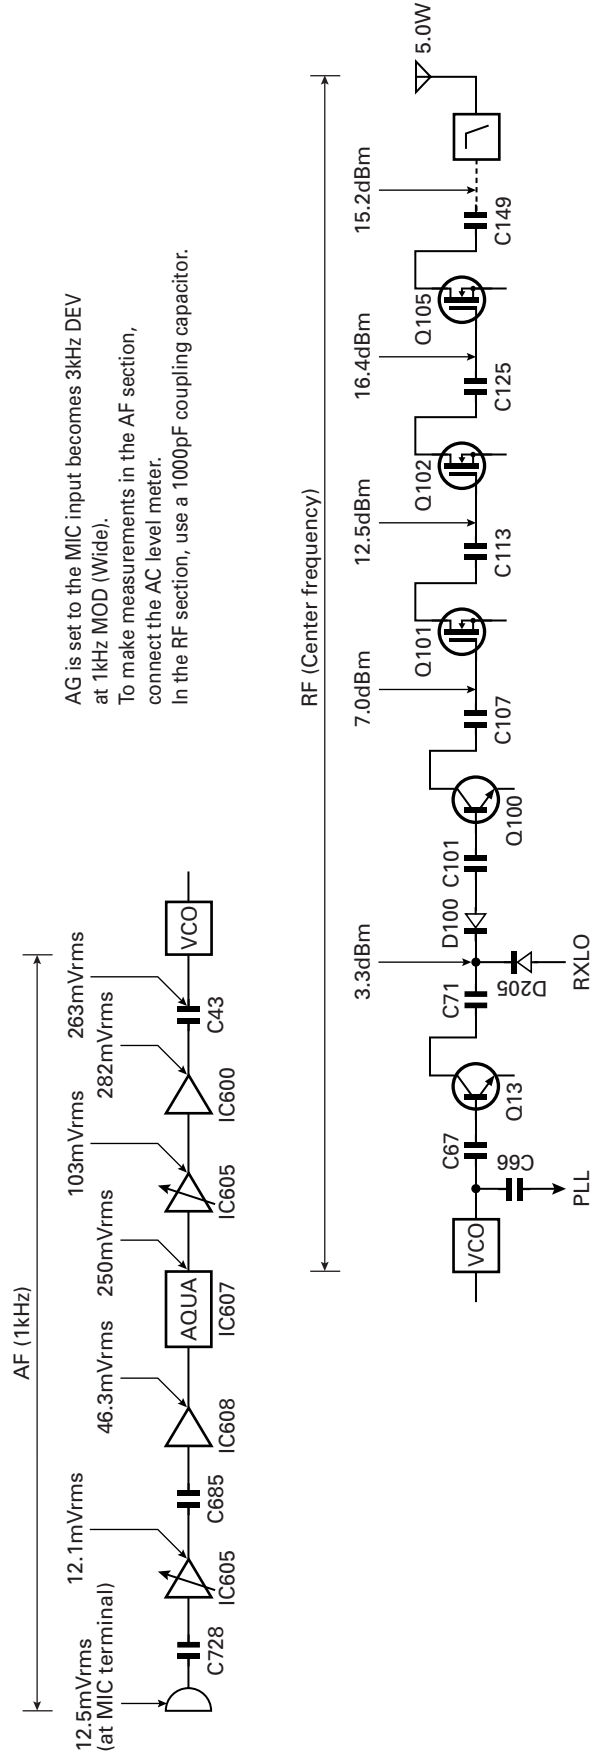

AG is set to the MIC input becomes 3kHz DEV at 1kHz MOD (Wide).
 To make measurements in the AF section, connect the AC level meter.
 In the RF section, use a 1000pF coupling capacitor.

SPECIFICATIONS

GENERAL

Frequency range	K, K3 : 450~520MHz	K2, K4 : 400~470MHz
Number of channels	Zone : Max. 128 per radio	Ch/GID : Max. 250 per zone (Max. 512 [Conv. Ch's + GID's] total per radio)
Channel spacing	Wide : 25kHz	Narrow : 12.5kHz
Battery voltage	7.5V DC \pm 20%	
Battery life (5-5-90 duty cycle, during hi-power)		
KNB-31A (1700mAh)	Approx. 9 hours	
KNB-32N (2500mAh)	Approx. 14 hours	
KNB-33L (1700mAh)	Approx. 10 hours	
Operating temperature range	-22°F~+140°F (-30°C~+60°C)	
Frequency stability	\pm 0.00025% (-22°F~+140°F)	
Antenna impedance	50 Ω	
Channel frequency spread	70MHz	
Dimensions (W x H x D)	2-5/16 x 5-6/16 x 1-5/16 in. (58 x 136 x 33 mm) with KNB-33L battery	
(Projections not included)	2-5/16 x 5-6/16 x 1-9/16 in. (58 x 136 x 39.5 mm) with KNB-31A or 32N battery	
Weight (net)	14.1 oz. (400 g) with battery (KNB-33L), antenna (KRA-23) and beltclip (KBH-11)	

RECEIVER (Measurements made per EIA/TIA-603)

Sensitivity (12dB SINAD)	Wide : 0.25 μ V	Narrow : 0.28 μ V
Selectivity	Wide : 70dB	Narrow : 63dB
Intermodulation distortion	W/N : 70dB (\pm 50, 100kHz)	
Spurious response	70dB	
Audio output (8 Ω impedance)	500mW with less than 3% distortion	

TRANSMITTER (Measurements made per EIA/TIA-603)

RF output power	HI : 5W	LO : 1W
Spurious response	70dB	
Type of emission	Wide : 16K0F3E	Narrow : 11K0F3E
FM hum & noise	Wide : 45dB	Narrow : 40dB
Audio distortion	W/N : 3%	

TK-3180

KENWOOD CORPORATION

2967-3, Ishikawa-machi, Hachioji-shi, Tokyo, 192-8525 Japan

KENWOOD U.S.A. CORPORATION

P.O. BOX 22745, 2201 East Dominguez Street, Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS BELGIUM N.V.

Leuvensesteenweg 248 J, 1800 Vilvoorde, Belgium

KENWOOD ELECTRONICS FRANCE S.A.

13, Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD18 9EB United Kingdom

KENWOOD ELECTRONICS EUROPE B.V.

Amsterdamseweg 37, 1422 AC Uithoorn, The Netherlands

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

KENWOOD IBERICA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001 499 074)

16 Giffnock Avenue, Centrecourt Estate, North Ryde, N.S.W. 2113 Australia

KENWOOD ELECTRONICS (HONG KONG) LTD.

Unit 3712-3724, Level 37, Tower one Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T., Hong Kong

KENWOOD ELECTRONICS SINGAPORE PTE LTD.

1 Ang Mo Kio Street 63, Singapore 569110

