

KENWOOD

Document Copyrights

Copyright 2006 by Kenwood Corporation. All rights reserved.

No part of this manual may be reproduced, translated, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, for any purpose without the prior written permission of Kenwood.

Disclaimer

While every precaution has been taken in the preparation of this manual, Kenwood assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein. Kenwood reserves the right to make changes to any products herein at any time for improvement purposes.


VHF FM REPEATER

TKR-740

SERVICE MANUAL

KENWOOD

© 1999-11 PRINTED IN JAPAN
B51-8505-00(S) 1534

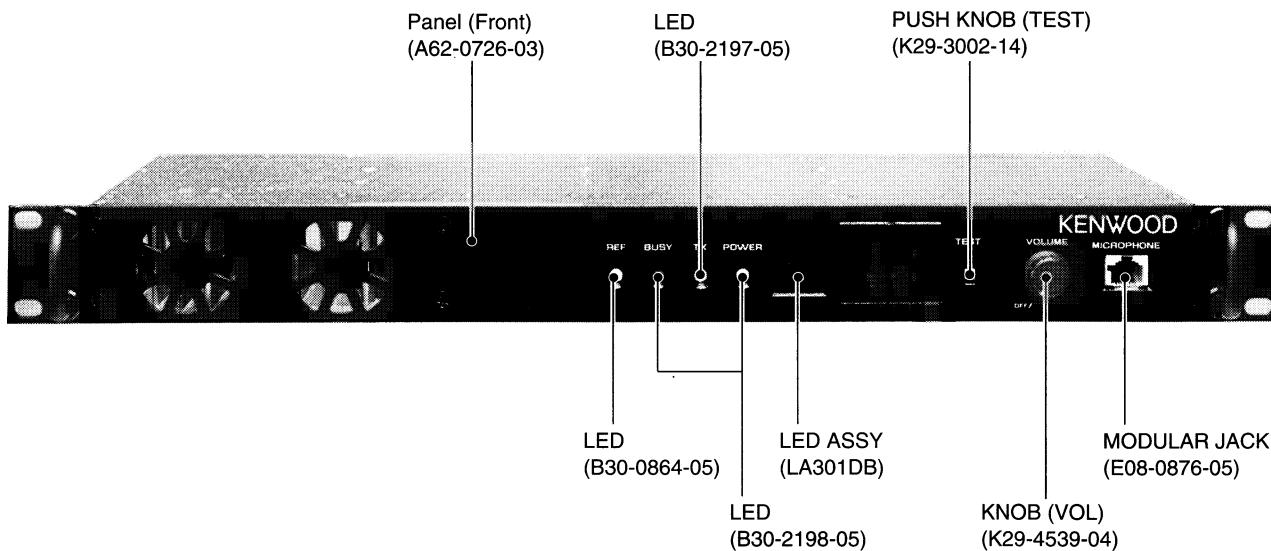

CONTENTS

GENERAL	2	ADJUSTMENT	67
SYSTEM SET-UP	2	PC BOARD VIEW	
INSTALLATION.....	3	CONTROL UNIT(X53-3880-10)	81
OPERATING FEATURES.....	4	TX UNIT(X56-3040-10)	91
REALIGNMENT	13	RX UNIT(X55-3050-XX)	103
APPLICATION NOTE	15	SCHEMATIC DIAGRAM	109
CIRCUIT DESCRIPTION	24	BLOCK DIAGRAM	121
SEMICONDUCTOR DATA	41	LEVEL DIAGRAM	123
DESCRIPTION OF COMPONENTS	43	INTERCONNECTION DIAGRAM	125
PARTS LIST	45	KES-4(EXTERNAL SPEAKER)	127
EXPLODED VIEW	59	KPG-46(PROGRAMMING INTERFACE CABLE)	128
PACKING	61	SPECIFICATIONS	BACK COVER
TERMINAL FUNCTION	62		

TKR-740

GENERAL / SYSTEM SET-UP

INTRODUCTION

SCOPE OF THIS MANUAL

This manual is intended for use by experienced technicians familiar with similar types of commercial grade communications equipment. It contains all required service information for the equipment and is current as of the publication date. Changes which may occur after publication are covered by either Service Bulletins or Manual Revisions. These are issued as required.

ORDERING REPLACEMENT PARTS

When ordering replacement parts or equipment information, the full part identification number should be included. This applies to all parts, components, kits, or chassis. If the part number is not known, include the chassis or kit number of which it is a part, and a sufficient description of the required component for proper identification.


PERSONNEL SAFETY

The following precautions are recommended for personnel safety:

- DO NOT transmit until you verify that all RF connectors are secure and any open connectors are properly terminated.
- SHUT OFF and DO NOT operate this equipment near electrical blasting caps or in an explosive atmosphere.
- This equipment should be serviced by a qualified technician only.

SERVICE

This radio is designed for easy servicing. Refer to the schematic diagrams, printed circuit board views, and alignment procedures contained within.


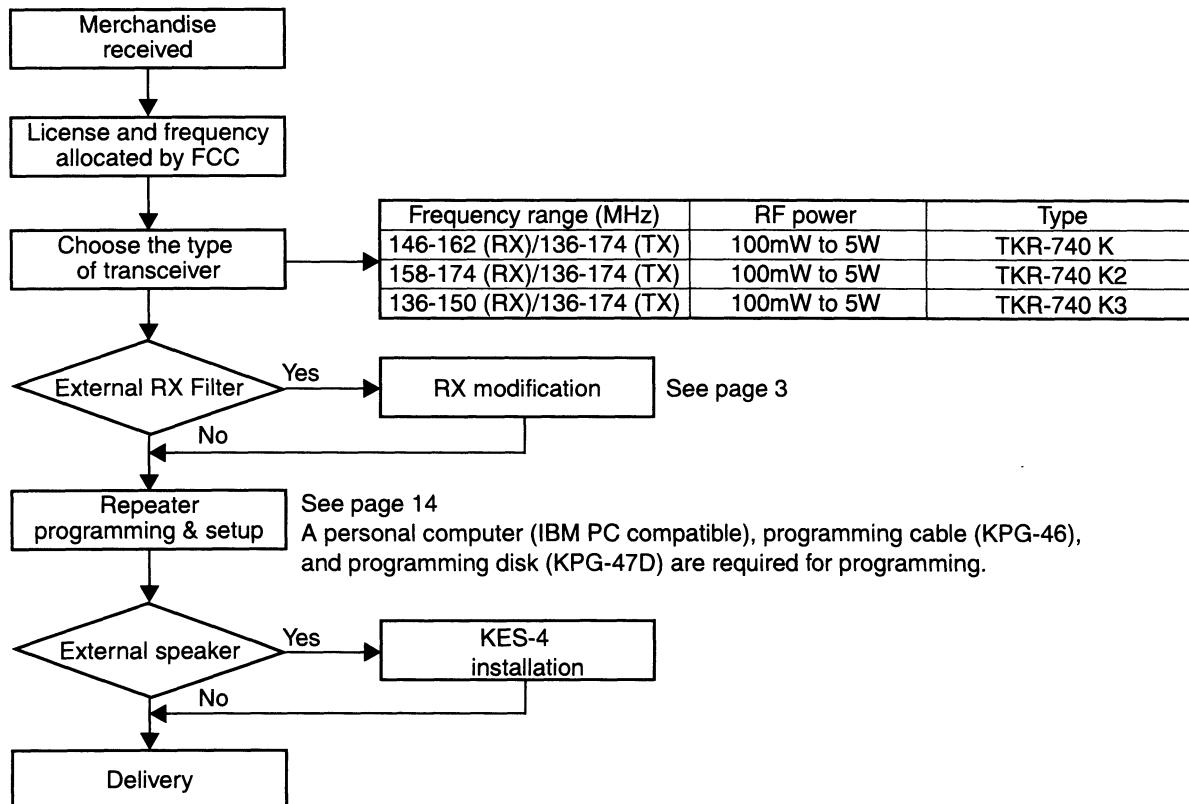


INSTALLATION

RX MODIFICATION FOR EXTERNAL PRESELECTOR FILTER

This model may be modified to use an external pre-selector filter.


- ① Remove the RX cover panel.
- ② Remove the flat clip spring from IC4 and L16
- ③ Remove the 11 screws from the RX unit and the 10 screws from the shield case.
- ④ Remove the jumper (R179) from the reverse side of the RX unit.
- ⑤ Insert an SMB receptacle (E04-0409-05) at CN10. Solder the 5 leads in place.
- ⑥ Replace the screws on the RX unit and shield case, and the flat clip spring on IC4 and L16.
- ⑦ Move the RX IN signal cable (from the back panel) from CN1 to CN10.
- ⑧ Connect a tracking generator signal to RX IN, then use a spectrum analyzer to read the output at CN2 while adjusting L16 for the proper response.
- ⑨ Next, adjust IF, squelch, and RSSI.
- ⑩ Replace the RX cover panel.

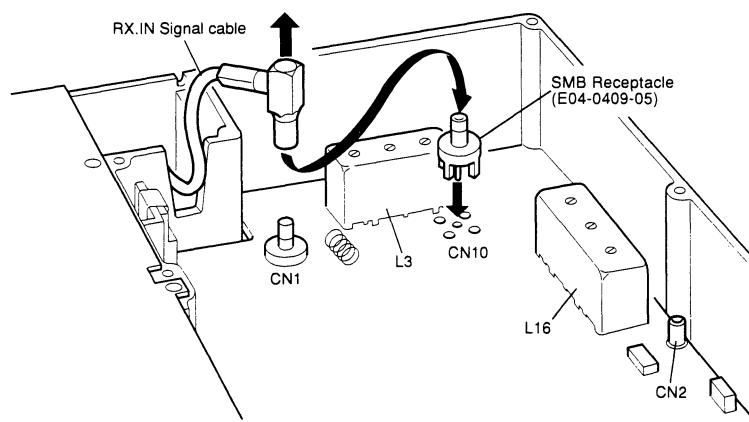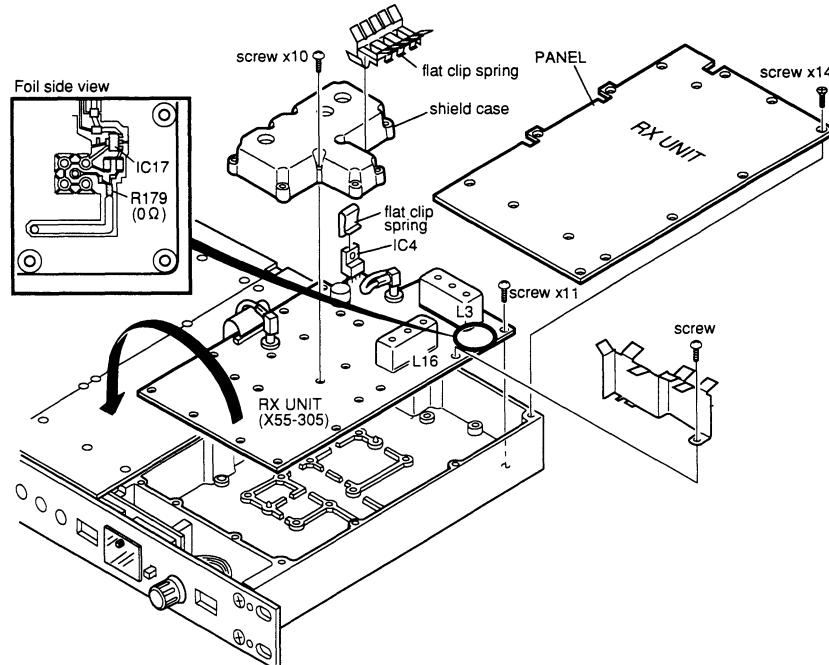

TKR-740

OPERATING FEATURES

1. Front Panel

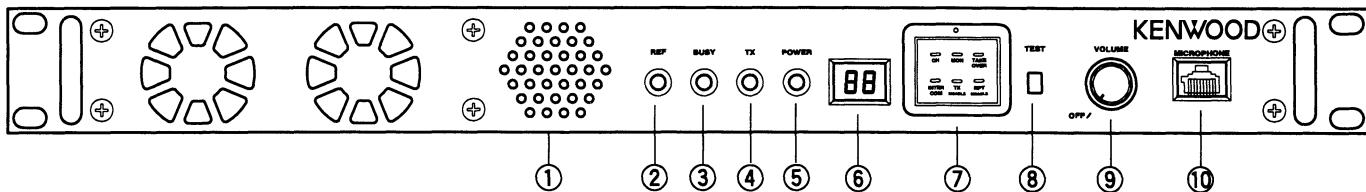

① Speaker

② REF (reference) indicator

Lights red when using an external reference oscillator. Lights green when using the internal oscillator.

③ BUSY indicator

Lights green when receiving. Flashes when receiving data from the KPG-47D or when the receiver PLL is unlocked.

④ TX (transmit) indicator

Lights red when transmitting. Flashes when transmitting data to the KPG-47D (during programming) or when the transmit PLL is unlocked.

⑤ POWER indicator


Lights green when DC power is applied to the TKR-740.

⑥ Display

Two 7-segment digits display the channel number or status.

⑦ Programmable Function keys

Press these keys to activate their programmable functions.



PF 1 Key	Default: CH (CH UP)
PF 2 Key	Default: MON (MONITOR ON/OFF)
PF 3 Key	Default: TAKE OVER (TAKE OVER ON/OFF)
PF 4 Key	Default: INTERCOM (INTERCOM ON/OFF)
PF 5 Key	Default: TX DISABLE (TX Disable/Enable)
PF 6 Key	Default: RPT DISABLE (Repeat Disable/Enable)

⑧ TEST switch

Press to transmit an unmodulated signal with no local microphone connected. If an external modulation signal source is connected to the CONTROL I/O jack, the RF signal is modulated with this signal source.


⑨ VOLUME control

Turn clockwise until a click sounds, to unmute the volume. Rotate to adjust the volume. Turn counterclockwise fully to mute the volume.

⑩ MICROPHONE jack

Connect a microphone to 8-pin modular jack.

2. Rear Panel

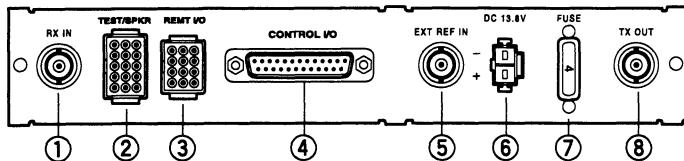

① RX IN jack

Connect an RX antenna or a duplexer to this BNC receptacle.

② TEST/SPKR jack

Test input/output jack. Connect an external speaker to this jack.

③ REMT I/O jack

Connect an external remote controller to this jack.

④ CONTROL I/O jack

Connect an external programming device or an external repeater controller to this DB-25 interface port.

⑤ EXT REF IN jack

Connect a high-stability external frequency reference oscillator (10MHz, -10dBm or higher) to this BNC receptacle (optional).

⑥ DC 13.8V jack

Connect a 13.8 V DC power supply to this jack.

⑦ FUSE


Insert a 4 A blade fuse into this fuse holder.

⑧ TX OUT jack

Connect a TX antenna or a duplexer to this BNC receptacle.

OPERATING FEATURES

3. Two 7-segment LED Displays




- Channel display (1-32): while operating normally in User Mode



- "E2" displayed when the channel data is not written.



- "PC" displayed while in PC Mode.



- "E3" displayed when PLL is unlocked .

Receiver PLL unlocked = flashing BUSY LED.

Transmitter PLL unlocked = flashing TX LED.

Internal 19.2MHz reference unlocked = flashing decimal point .



- "PG" displayed while in Firmware Programming Mode


2 decimal points displayed = 115,200 bps

1 decimal point displayed = 57,600 bps

No decimal = 38,400 bps



- "E4" displayed when PTT is attempted on a channel number that has no frequency data programmed.



- "E1" displayed when FPU data is not written.



- "SC" displayed while in scan mode

when the displayed channel is contained in scan sequence, the right side decimal point is displayed.

When the displayed channel is the priority channel, the left side decimal point is displayed.

OPERATING FEATURES

4. Programmable Functions

TKR-740 contains many Programmable Functions tabled below.

Programmable Function	Description
Channel 1-32	Directly select Channel 1 to 32, respectively.
Channel Down	The channel decrements by one.
Channel Up	The channel increments by one.
AUX Out 1-6 Off	AUX Out 1 to 6 ports become deactivated, respectively.
AUX I/O 1-7 Off	AUX I/O 1 to 7 ports become deactivated, respectively.
AUX Out 1-6 On	AUX Out 1 to 6 ports become activated, respectively.
AUX I/O 1-7 On	AUX I/O 1 to 7 ports become activated, respectively.
AUX Out 1-6 On/Off	AUX Out 1 to 6 ports are toggled between its active and inactive states, respectively.
AUX I/O 1-7 On/Off	AUX I/O 1 to 7 ports are toggled between its active and inactive states, respectively.
Repeat Enable	Enables repeater operation.
Repeat Disable	Disables repeater operation.
Repeat Disable/Enable	Toggles between disabling and enabling repeater operation.
TX Enable	The transmitter is enabled (normal).
TX Disable	The transmitter is inhibited.
TX Disable/Enable	Toggles between transmitter enabled (normal) and transmitter inhibited.
Remote TX Enable	The Remote PTT is enabled.
Remote TX Disable	The Remote PTT is disabled.
Remote TX Disable/Enable	The Remote PTT is toggled between disabled and enabled.
Local TX Enable	The local mic's PTT is enabled.
Local TX Disable	The local mic's PTT is disabled.
Local TX Disable/Enable	The local mic's PTT is toggled between disabled and enabled.
Scan Off	Inhibits scanning.
Scan On	Starts scanning.
Scan On/Off	Scanning is toggled between being enabled or inhibited.
Intercom On	The Intercom feature is enabled.
Intercom Off	The Intercom feature is disabled.
Intercom On/Off	The Intercom feature is toggled between enabled and disabled.
Voting Tone Off	Inhibits the Voting Pilot Tone.
Voting Tone On	Enables the Voting Pilot Tone.
Voting Tone On/Off	Toggles between enabling and inhibiting the Voting Pilot Tone.
Take Over	Toggles between enabling and disabling remote wireline control.
QT/DQT Encode Enable	Enables the QT/DQT encode operation.
QT/DQT Encode Disable	Disables the QT/DQT encode operation.
QT/DQT Encode Disable/Enable	Toggles between disabling and enabling the QT/DQT decode operation.
QT/DQT Decode Enable	Enables the QT/DQT decode operation.
QT/DQT Decode Disable	Disables the QT/DQT decode operation.
QT/DQT Decode Disable/Enable	Toggles between disabling and enabling the QT/DQT decode operation.
Test Tone Off	The Test Tone is inhibited.
Test Tone On	The Test Tone is enabled.
Test Tone On/Off	Toggles between enabling and inhibiting the Test Tone.
Squelch Off	The Squelch unmutes.
Squelch On	The Squelch mutes.
Squelch On/Off	The receiver's squelch toggles between muted and unmuted.
Squelch Momentary	The squelch momentarily unmutes.
Monitor Off	The QT/DQT decoder is enabled.
Monitor On	The QT/DQT decoder is disabled.
Monitor On/Off	The QT/DQT decoder is toggled between enable and disable.

OPERATING FEATURES

Programmable Function	Description
Monitor Momentary	The QT/DQT decoder is momentarily disabled.
CW ID On	The CW ID is transmitted.
CW Message 1-8 On	The CW Message 1 to 8 is transmitted, respectively.
TOT Enable	The Time Out Timer is enabled.
TOT Disable	The Time Out Timer is disabled.
TOT Disable/Enable	The Time Out Time is toggled between enabled and disabled.
Hold Time Enable	The parameter of Repeat Hold Time is enabled.
Hold Time Disable	The parameter of Repeat Hold Time is disabled.
Hold Time Disable/Enable	The parameter of Repeat Hold Time is toggled between disabled and enabled.
Scrambler Off	Disables an installed optional voice scrambler board.
Scrambler On	Enables an installed optional voice scrambler board.
Scrambler On/Off	Toggles between enabling and disabling an installed optional voice scrambler board.
Digital Pager PTT	Accepts the external paging encoder's PTT on AUX Input 2.
Digital Pager Data	Accepts the external paging encoder's digital signal on AUX Input 3.
Reset	Resets to default condition set up by FPU.
None	No function.

- The following Programmable Functions are output functions used to tell the condition of the TKR-740 to an external device.
- The output functions can be assigned to only AUX Outputs as follows.

Programmable Function	Description
COR(Carrier Operate Relay)	This function becomes valid if an RF carrier is present.
TOR(Tone Operate Relay)	This function becomes valid if an RF carrier and specified QT/DQT are present.
TXS(TX Sense)	This function becomes valid when the transmitter is keyed.
RX Unlock	This alarm function becomes valid if the RX PLL circuitry becomes unlocked.
TX Unlock	This alarm function becomes valid if the TX PLL circuitry become unlocked.
Exciter Temperature	This alarm function becomes valid if the temperature of transmitter's exciter exceeds approximately 203°F (95°C) while transmitting.
Power Supply Upper Limit	This alarm function becomes valid if the DC power supply voltage exceeds the preset point. The preset point is selected in the range of 13.9V to 15.9V.
Power Supply Lower Limit	This alarm function becomes valid if the DC power supply voltage becomes less than the preset point. The preset point is selected in the range of 11.7V to 13.8V.
Exciter Power Upper Limit	This alarm function becomes valid if the transmitter's RF Power output exceeds the preset point in High power range. The preset point is selected in the range of 5W to 7W.
Exciter Power Lower Limit	This alarm function becomes valid if the transmitter's RF Power output becomes less than the preset point in High power range. The preset point is selected in the range of 1W to 4W.
RX Signal Detect (Above)	This function becomes valid if the receive signal strength exceeds the preset point. The preset point is selected in the range of -120dBm to -80dBm.
RX Signal Detect (Below)	This function becomes valid if the receive signal strength becomes less than the preset point. The preset point is selected in the range of -120dBm to -80dBm.
Selectable	AUX Outputs which are set up as Selectable appear in the available Function List for the AUX Input Functions and Key Assignment. This allows AUX Inputs and PF Keys to be used to control AUX Outputs.

OPERATING FEATURES

5. Trigger Assignment

The Programmable Functions described above can be assigned to PF Keys, AUX Input, and Start Up according to following table. In the last column of the table, when the Programmable Functions is assigned to any PF Keys, it

expresses that the LED in the PF Key turns on either conditions. 'O' expresses that the trigger is available the Programmable Function. 'X' expresses that the trigger is not available the Programmable Function.

Function	Trigger	PF Keys	AUX Input	Start Up	Condition of LED on
Channel 1-32, Up/Down		O	O	O	Do not turn on
AUX Out 1-6(I/O 1-7) Off		X	O	O	-
AUX Out 1-6(I/O 1-7) On		X	O	O	-
AUX Out 1-6(I/O 1-7) On/Off		O	O	X	Turns on in ON status
Repeat Enable		X	O	O	-
Repeat Disable		X	O	O	-
Repeat Disable/Enable		O	O	X	Turns on in Disable status
TX Enable		X	O	O	-
TX Disable		X	O	O	-
TX Disable/Enable		O	O	X	Turns on in Disable status
Remote TX Enable		X	O	O	-
Remote TX Disable		X	O	O	-
Remote TX Disable/Enable		O	O	X	Turns on in Disable status
Local TX Enable		X	O	O	-
Local TX Disable		X	O	O	-
Local TX Disable/Enable		O	O	X	Turns on in Disable status
Scan Off		X	O	O	-
Scan On		X	O	O	-
Scan On/Off		O	O	X	Turns on in ON status
Intercom On		X	O	O	-
Intercom Off		X	O	O	-
Intercom On/Off		O	O	X	Turns on in ON status
Voting Off		X	O	O	-
Voting On		X	O	O	-
Voting On/Off		O	O	X	Turns on in ON status
Take Over		O	X	X	Turns on in ON status
QT/DQT Encode Enable		X	O	O	-
QT/DQT Encode Disable		X	O	O	-
QT/DQT Encode Disable/Enable		O	O	X	Turns on in Disable status
QT/DQT Decode Enable		X	O	O	-
QT/DQT Decode Disable		X	O	O	-
QT/DQT Decode Disable/Enable		O	O	X	Turns on in Disable status
Test Tone Off		X	O	O	-
Test Tone On		X	O	O	-
Test Tone On/Off		O	O	X	Turns on in ON status
Squelch Off		X	O	O	-
Squelch On		X	O	O	-
Squelch On/Off		O	O	X	Turns on in OFF status
Squelch Momentary		O	X	X	Turns on in OFF status
Monitor Off		X	O	O	-

OPERATING FEATURES

Function	Trigger			Condition of LED on
	PF Keys	AUX Input	Start Up	
Monitor On	X	O	O	-
Monitor On/Off	O	O	X	Turns on in ON status
Monitor Momentary	O	X	X	Turns on in ON status
CW ID On	O	O	O	Turns on while transmitting
CW Message 1-8 On	O	O	O	Turns on while transmitting
TOT Enable	X	O	O	-
TOT Disable	X	O	O	-
TOT Disable/Enable	O	O	X	Turns on in Disable status
Hold Time Enable	X	O	O	-
Hold Time Disable	X	O	O	-
Hold Time Disable/Enable	O	O	X	Turns on in Disable status
Scrambler Off	X	O	O	-
Scrambler On	X	O	O	-
Scrambler On/Off	O	O	X	Turns on in ON status
Reset	O	O	X	Do not turn on
None	O	O	O	Do not turn on

OPERATING FEATURES

6. Simplex/Duplex Operation

The Simplex/Duplex function is used to specify whether the channel is used as simplex (receiver muted during transmit) or duplex (receiver unmuted during transmit). The channel has same TX/RX frequency and can operate only in Simplex mode.

7. Repeater/Base Station Operation

The Repeat function is used to specify whether the channel is used as a repeater or as a base station. A repeater simultaneously and automatically re-transmits its received audio; a duplex base station has independent simultaneous transmit and receive paths; a simplex base station are mutually exclusive transmit and receive paths.

8. Signalling Feature

8.1 Multiple QT/DQT

The TKR-740 can function as a multiple-QT/DQT decode/encode unit for operation as a community repeater or multiple-QT/DQT base station. 16 Multi Tables can be created, each Multi Table consisting of 16 decode / encode combinations and can be assigned on a per-channel basis.

The Multi Table function enables the TKR-740 to decode any one of the 16 QT/DQTs pre-programmed into the selected Multi Table. When receiving a signal (repeater operation), the repeater uses the QT/DQT encode which corresponds to the decoded QT/DQT as set in the Multi Table. In the Multi Table, signalling pair of "No.1" (first column) is defined as "Primary". A receiving signalling (if it is contained within No.1 to No.16) is defined as "Current".

8.2 Encode Tone in Multiple

When Local mic PTT, Remote PTT or Ext. PTT is active while the repeater is in use or the duplex-base station is receiving, the encode signalling is determined according to Encode Tone in Multiple function. The simplex-base station always transmits the "Primary" encode QT/DQT.

Current : When any PTT as described above is active while the repeater is in use or the duplex-base station is receiving, the "paired" encode QT/DQT associated with receiving QT/DQT is transmitted. When any PTT is active while the repeater or the duplex-base station is in idle period, the "Primary" encode QT/DQT is transmitted.

Primary : When any PTT (provided that the Priority of any PTT is higher than the Priority of Repeat PTT) is active while the repeater is in use, the encode QT/DQT changes "paired" encode QT/DQT to "Primary" while continuing to transmit. When any PTT is active while the repeater is in idle period, the "Primary" encode QT/DQT is transmitted. In the base station, the "Primary" encode QT/DQT is always transmitted regardless of the receiver status.

8.3 QT Reverse Burst Time

During repeat with QT tones, the repeater re-transmits a phase-shifted burst of the QT tone ("reverse burst") when it detects the radio using the repeater has un-keyed and also

sent a reverse QT burst (squelch-tail elimination). This mutes a receiving radio's speaker audio before its receiver circuit shuts off causes squelch tail noise in the speaker audio. The TKR-740 can select the time between 140 to 200 ms that the QT reverse burst is sent. Typically this time should not have to be adjusted from the default value. The transmission of the QT reverse burst can be also inhibited if the QT Reverse Burst function is set to "No".

8.4 DQT Turn Off Code Time

During repeat with DQT codes, the repeater re-transmits a specific turn-off code when it detects the radio using the repeater has un-keyed and also sent the turn-off code (squelch-tail elimination). This mutes a receiving radio's speaker audio before its receiver circuit shuts off and causes squelch tail noise in the speaker audio. The TKR-740 can select the time between 140 to 200 ms that the DQT turn-off code is sent. Typically this time should not have to be adjusted from the default value.

8.5 Off Hook Decode

The TKR-740 is able to decode QT/DQT regardless whether the local microphone is in the on- or off-hook condition. When the Off Hook Decode function is enabled, the TKR-740 is capable of QT/DQT decode even though the microphone is in the off-hook condition (or a local microphone is not installed).

9. Scan Feature

9.1 Scan Operation

Providing that the TKR-740 contains two or more non-priority ADD channel or one or more non-priority ADD channel and Priority channel, it starts scanning once the Scan On function is executed and displays "SC" on the 7-seg LED. Scanning stops temporarily if any following conditions become valid.

- 1) if a RF carrier and a valid QT/DQT is present. The receiving channel number is displayed and the received audio is heard from a speaker.
- 2) if a RF carrier is present, providing that the Monitor On function is executed.
- 3) if the Squelch Off function is executed. Scanning stops on the channel being scanned when Squelch Off is executed, the channel number is displayed and the received audio is heard from a speaker.
- 4) if a local microphone's hook is in off hook status, providing that the Off Hook Scan function is set to Disable. Scanning stops on the Revert channel, but the audio is not heard until a valid signal is received.

When the received call is ended, scanning automatically resumes after the period set in Dropout Delay Time function has expired. When the Scan Off function is executed, the TKR-740 inhibits scanning and displays the selected channel.

9.2 Scan Sequence

- 1) Normal Scan : When no Priority channel is set, scanning of ADD channels is done in ascending order.
- 2) Single Priority Scan : The Priority channel is set as either a

OPERATING FEATURES

fixed channel or a selected channel. When Priority channel is set, Priority channel and non Priority channel is scanned by turns. When scanning stops on the non Priority channel, calls from the Priority channel is still checked at set intervals while scanning is stopped. This operation is called Look Back and the interval period is selected by the Look Back Time function.

9.3 Revert Channel

The Revert channel is a channel that used to transmit during scanning. The time from the end of transmission on Revert channel to the time scanning automatically resumes is set in Dwell Time function. The Revert channel types are Last Called, Last Used, Selected + Talkback, Priority, Priority plus Talkback, and Selected.

- 1) Last Called : The TKR-740 reverts to the channel upon which a call was last received even if scanning has resumed (power on default = selected channel).
- 2) Last Used (with Talkback) : The TKR-740 reverts to the channel that was last transmitted on (power on default = selected channel). However, if a call is received on a channel other than the last transmit channel and PTT is pressed before scanning resumes, the transceiver "talks back" on the current receive channel.
- 3) Selected+Talkback : The TKR-740 reverts to the channel set by the Channel 'X' functions or Channel Select function prior to scan initiation. However, if a call is received on a channel other than the selected channel and PTT is pressed before scanning resumes, the transceiver "talks back" on the current receive channel.
- 4) Priority : The TKR-740 always reverts to the Priority channel.
- 5) Priority+Talkback : The TKR-740 always reverts to the Priority channel. However, if a call is received on a channel other than the Priority channel and PTT is pressed before scanning resumes, the transceiver "talks back" on the current receive channel.
- 6) Selected : The transceiver reverts to the channel set by the function prior to scan initiation.

10. CW ID and Message

The TKR-740 contains internal automatic station identifiers. The CW ID (Morse code) is set and transmitted on a per-channel basis. The CW ID is transmitted when the interval period is reached (TX Interval Time function), the channel is changed (CW ID on Channel Change function) or CW ID On function is executed. When CW ID is activated by any functions described above, it is actually sent after the total time of TX Delay Time (not applied to CW ID On function) and CW Modulation Delay Time has expired. TX Delay Time is a period from CW ID is activated to the transmitter is keyed. CW Modulation Delay is a period from the transmitter is keyed to the CW ID tone is sent. The CW ID tone is routed to the Remote Receive Audio (Remote RA) port if the Send CW ID to Remote RA function is set to Yes, consequently the console can monitor the CW ID tone.

The TKR-740 contains 8 message banks for CW Message. CW Message 1 to 8 is transmitted on the current channel when the CW Message 1 to 8 On function is activated, respectively.

11. PTT Priority

A number of keying sources can be used to cause the TKR-740 to transmit. The transmit audio path is switched according to their keying sources and when PTTs is simultaneously activated, the transmit audio path related to the PTT with higher priority is given priority. These are Local Mic PTT, External PTT, Remote PTT, Repeat PTT and Digital Pager PTT. However, since Digital Pager PTT is considered lowest of priority, it is not selected in the order of priority.

12. Intercom Operation

The repeater has an Intercom feature which allows wireline communication between the dispatcher at the remote site and the servicing technician at the repeater. To use this feature, Intercom On/Off (mandatory), TX Disable/Enable, Local TX Disable/Enable and Remote TX Disable/Enable functions must be optionally assigned to a PF Key or an Aux Input.

When Intercom On function is executed and a PTT is activated, a intercom operation becomes valid and a transmitter is also keyed. To use the Intercom without keying the transmitter, enable the TX Disable function (PF Key or Aux Input). To use the Intercom with a local mic's PTT without keying the transmitter, enable the Local TX Disable function. To use the Intercom with the wireline remote site's PTT without keying the transmitter, enable the Remote TX Disable function.

The audio routing during Intercom operation is determined by the Intercom Remote/Local function.

- 1) Remote : Audio from the Remote TA port will be heard on the local speaker while a Remote PTT is pressed, regardless of whether receiver audio is present.
- 2) Local : Audio from the local Mic will be routed to the Remote RA port on the rear panel regardless of whether receiver audio is present. This local Mic audio will be heard at the remote.
- 3) Remote/Local : Audio from the remote and the local Mic audio will be heard from the local speaker and from the remote respectively, regardless of whether receiver audio is present.

13. Voting Pilot Tone

The TKR-740 contains an internal Voting Pilot Tone Generator to be used with a voting comparator shelf. The Voting Pilot Tone is sent from a remote receiver to a voting comparator during idle periods. This continuous tone is used to confirm that the phone line is intact as well as establish a reference amplitude for the audio which will be present once the remote receiver is unsquelched by a received signal. The Voting Pilot Tone is a single-frequency sine wave and is turned On and Off by toggling Voting Tone On/Off functions. When any Voting Pilot Tone is selected, the selected Voting Pilot Tone is automatically output to RA and Remote RA ports.

TKR-740

OPERATING FEATURES

14. Digital Pager

The TKR-740 can be used as a digital paging transmitter by using the Digital Pager inputs on the rear panel. These inputs accept the logical 0 or 1 (0 V or 5 V) from the external paging encoder, producing a +4.5 kHz carrier shift in response to a 0 and a -4.5 kHz in response to a 1. If Digital Paging Input function is enabled, the TKR-740 accepts the external encoder's digital signal on AUX In 3 and its PTT on AUX In 2 (active low).

15. Time Out Timer

The Time Out Timer function determines the period of time users can continuously transmit. When the selected period expires, the transmission is inhibited.

16. Repeat Hold Time

The Repeat Hold Timer (hang timer) function is used to prevent the repeater from being repeatedly keyed and unkeyed in response to short message traffic. When a mobile transceiver unkeys, the repeater's Hold Timer allows the repeater to continue transmitting for a brief period while waiting for a responding end user. If no valid QT/DQT is detected within the Hold Timer period, the transmitter is allowed to unkey. This function determines the period of time that the transmitter is allowed to remain keyed after the loss of a valid QT/DQT received signal.

17. Take Over

Take Over function is used to disable the remote wireline control of the repeater. When Take Over function is enable, the AUX Inputs and outputs, remote audio inputs and outputs, External PTT, External Monitor, Remote PTT and TXD2/RXD2 serial data lines are disabled. All AUX Input functions assigned to any AUX Input remain in current state. However Remote PTT, External PTT and External Monitor become a "Off" state.

18. Test Tone

The Test Tone is a single-frequency audio sine wave and is turned On and Off by toggling Test Tone On/Off functions. The transmitter can be modulated without a local mic by using the test tone. When Test Tone On function is executed and any PTT is activated, the TKR-740 transmits the test tone with mic mute and also routes the test tone to Remote RA port.

19. AUX Input and Output

There are 7 programmable AUX I/O Ports 1-7(pins 6-12) on the rear 12 pin REMT I/O connector and 3 programmable AUX Input Ports 1-3 (pins 4-6) and 6 programmable AUX Output ports (pins 20-25) on the rear 25 pin D-Sub connector. The 7 programmable AUX I/O pins are primarily intended for remote control interfaces. Each AUX I/O Port can be set for AUX Input, AUX Output or remote Channel Select types.

The AUX Input port can be set execute a single input function or a set of up to three functions when the port is activated. If the port type for an AUX I/O Ports 1-7 is set for "AUX Input", it will also appear AUX Input window for function programming. The input logic is fixed as active low.

The AUX Output port can be set execute a single output function. If the port type for an AUX I/O Ports 1-7 is set for "AUX Output" it will also appear AUX Output window for function programming. The Output logic of AUX Output can be set as either active High or active Low by the Logic Type function. Active High outputs a High (5V) when the programmed condition becomes valid; active Low outputs a Low (0V) when the condition becomes valid.

20. Channel Select

AUX I/O Ports 1-5 (1 or all 5) can each be set for "Channel Select" providing up to 32 channel selection capability. These are 1 to 5 bit Binary Coded Decimal (BCD) inputs. AUX I/O 1 is a least significant bit. When all of AUX I/O ports 1-5 is set to Channel Select, "11111" input (LSB on the right side) signifies the Channel 1 and "11110" input signifies the Channel 2. When the Channel Select function is set to any AUX I/O Ports, The Channel 'X' function (Channel Up, Channel Down, Channel 1, etc.) can not be set to the AUX Input ports, but can be set to the PF Keys. Normally the channel control is controlled by the Channel Select function. If the Take Over function is executed, the channel control is disabled to be controlled by the Channel Select and enabled to be controlled by the PF Keys.

21. Start Up


When the TKR-740 is first turned on or is reset, up to 3 functions pre-programmed into the Start Up function are executed in sequence.

22. Optional Board

The TKR-740 can be installed as a optional scrambler board. Scrambler codes between 1 and 16 are available per channel. If the scrambler board is not to be used (although it is installed), set the parameter to "Off". When any Scrambler code is set up and Scrambler On function is executed, the scrambler board is activated.

REALIGNMENT

1. Modes

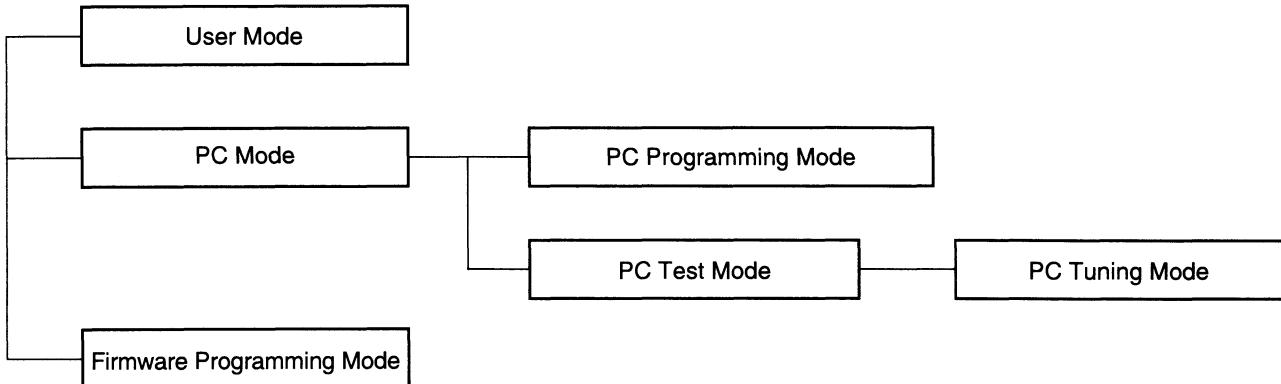

Mode	Function
User Mode	Use this mode for normal operation.
PC Mode	Use this mode to make various settings by means of the FPU through the RS-232C port.
PC Programming Mode	Use to read and write frequency data and other features to and from the Repeater.
PC Test Mode	Use to check the Repeater using the PC. This feature is included in the FPU.
Firmware Programming Mode	Use when changing the Firmware program of the flash memory.

2. How to Enter Each Mode

Mode	Operation
User Mode	Power ON.
PC Mode	Received commands from PC.
Firmware Programming Mode	[PF1] key + Power ON (one second).

REALIGNMENT

3. PC Mode

3-1. Preface

The TKR-740 repeater is programmed by using a personal computer, programming interface and KPG-47D software. (Version 2.00 or later)

3-2. Connection procedure

1. Connect the TKR-740 to the personal computer with the interface cable.
2. When power is applied, the user mode is entered immediately. When the PC sends a command, the repeater enters the PC mode and displays "PC" on the 7-segment LED. When data is being transmitted to the PC from the repeater, the TX LED flashes. The BUSY LED flashes when data from the PC is being received by the repeater.

Notes:

- The data stored in the personal computer must match the model type, when it is written into the flash memory.
- Change the TKR-740 to PC mode, then attach the interface cable.

3-3. KPG-46 description (PC programming interface cable : Option)

The KPG-46 is required to interface the TKR-740 to the computer. It has a circuit in its D-subconnector (25-pin) case that converts the RS-232C logic level to the TTL level. The KPG-46 connects the MICROPHONE connector of the TKR-740 to the computer's RS-232C serial port.

3-4. Programming software description

The KPG-47D programming disk is supplied in 3-1/2" disk format. The software on the disk allows a user to program TKR-740 repeater via the programming interface cable (KPG-46).

3-5. Programming with IBM PC

Data can be programmed into the flash memory in RS-232C format via the MICROPHONE connector.

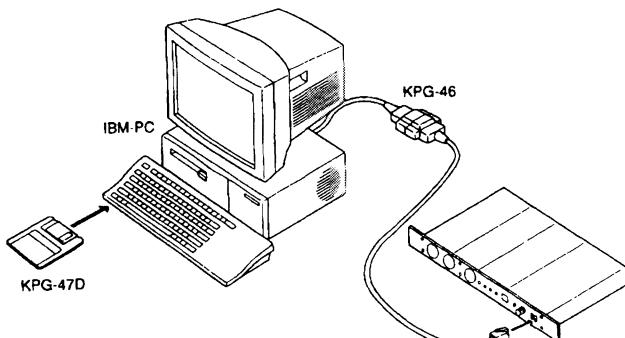


Fig.1

4. Firmware Programming Mode

4-1. Preface

The TKR-740 uses flash memory to allow it to be easily upgraded when new features are released in the future.

4-2. Connection procedure

Connect the TKR-740 to the personal computer (IBM PC or compatible) with the interface cable (KPG-46). (Connection is the same as in the PC Mode.)

Notes:

You can only program firmware from the 8-pin microphone connector on the front panel. Using the 25-pin logic interface on the rear panel will not work.

4-3. Programming

1. Start up the programming software (KPG-47D), select "firmware program" in the "Program" item, and press the Return key on the personal computer. This starts up the firmware programmer.
2. The top screen is displayed. Press any key to advance to the next screen.
3. Set the communications speed (normally, 115200 bps) and communications port in the Setup item.
4. Set the firmware to be updated by File select (=F1).
5. Turn the TKR-740 power ON with the [PF 1] key held down. Hold the key down for one second until the 7-segment display changes to "P.G.". When "P.G." appears, release your finger from the key.
6. Check the connection between the TKR-740 and the personal computer, and make sure that the TKR-740 is in the Program Mode.
7. Press F10 on the personal computer. A window opens on the display to indicate progress of writing.
8. If writing ends successfully, the TX LED on the TKR-740 lights.
9. If you want to continue programming other TKR-740s, repeat steps 3 to 6.

Notes:

- To start the Firmware Programmer from KPG-47D, the Fpro path must be set up by KPG-47D Setup.
- This mode cannot be entered if the Firmware Program mode is set to Disable in the Programming software (KPG-47D).

4-4. Function

If you press the [PF 1] key (front panel), both decimal point on the 7-segment display will disappear. The writing speed is 38400 bps (low-speed mode). If you press the [PF 1] key again, the right hand decimal points will light. The writing speed is 57600 bps (middle-speed mode).

Notes:

Normally, write in the high-speed mode (115200 bps).

APPLICATION NOTE


1. External I/O Connector Description

1.1. MICROPHONE jack

Connector	No.	Terminal Name	Description
MICROPHONE	1	NC	No Connection
	2	+B	Power Source; 13.8V ±15% / 0.75A maximum
	3	GND	GND *1
	4	PTT (PC serial data from radio)	PC Read/Write, PC Tuning, Firmware programming
	5	MIG	MIC Ground *1
	6	MIC	MIC input (600Ω) *1
	7	HOOK (PC serial data to radio)	PC Read/Write, PC Tuning, Firmware programming
	8	NC	No Connection

Notes:

- *1 Pin 5 (MIG) is used for MIC audio ground only. Electrical grounds such as PTT current return must use Pin 3 (GND).




MICROPHONE jack (Viewed from Front Panel)

1.2. TEST/SPKR jack

Connector	No.	Terminal Name	Description	I/O	Level
TEST / SPKR	1	B+(AUX)	Un-switched B+ 1A maximum *1	O	13.8V
	2	B+(AUX)	Un-switched B+ 1A maximum *1	O	13.8V
	3	NC	No Connection		
	4	GND	GND		
	5	GND	GND		
	6	SPG (Speaker Ground)	GND *2		
	7	RD (RX Data output)	RX Detector audio output (non-squelched) (Receive @ 1kHz Modulation, 60% Deviation)	O	80mV
	8	RSSI	RSSI voltage check (See Reference Table)	O	0 to 5V
	9	SPI (Internal Speaker Input)	Internal Speaker Input *2	I	
	10	TXCV	TX VCO lock voltage check (See Reference Table)	O	1.0 to 4.5V
	11	RXCV	RX VCO lock voltage check (See Reference Table)	O	1.0 to 4.5V
	12	SPO	External Speaker Output (4W/4Ω) *2	O	
	13	VC	Voltage check of Power Source (Impedance: 10kΩ)	O	13.8V
	14	FWD	Voltage check of Forward power (See Reference Table)	O	0 to 5V
	15	EXT REF	External reference check (INT; 5V EXT; 0V)	O	0 or 5V

Notes:

- *1 This source can be used to power external equipment to a maximum 1A on each line (max 2A total). Use is prohibited with the fuse beyond 6A strictly.
- *2 Connect SPI and SPO by using the 15pin I/O plug when using the internal speaker. (INT-SP: 0.25W/32Ω) When using an external speaker, remove the jumper lead from the connector and attach the speaker cable to SPO (pin 12) and SPG (pin 6).



**TEST / SPKR jack
(Viewed from Back Panel)**


VOLTAGE REFERENCE TABLE (approximate +VDC)

	TKR-740K
RSSI (@ -100dBm)	2.5V
FWD (@ 5W)	1.2V
TXCV	1.4V @ 136.0MHz
	4.5V @ 154.9MHz
	1.8V @ 155.0MHz
	4.5V @ 174.0MHz
	1.8V @ 147.0MHz
RXCV	4.5V @ 153.9MHz
	1.8V @ 154.0MHz
	4.5V @ 162.0MHz

APPLICATION NOTE

1.3. CONTROL I/O jack

Connector	No.	Terminal Name	Description	I/O	Level
CONTROL I/O	1	NC	No Connection		
	2	RXD2 (PC serial data to radio)	PC Read/Write, PC Tuning, Remote *1	I	RS-232C Level
	3	TXD2 (PC serial data from radio)	PC Read/Write, PC Tuning, Remote *1	O	RS-232C Level
	4	AUXI 1	Programmable Function input 1 *2	I	0 or 5V
	5	AUXI 2	Programmable Function input 2 *2	I	0 or 5V
	6	AUXI 3	Programmable Function input 3 *2	I	0 or 5V
	7	DG (Digital Ground)	GND (for Digital ground only)		
	8	TD (TX Data input)	TX Signalling data input *3	I	0.5Vpp
	9	TA (TX Audio input)	TX Audio input *3	I	140mVrms
	10	RD (RX Data output)	RX Signalling data output *3	O	80mVrms
	11	RA (RX Audio output)	RX Audio output *3	O	400mVrms
	12	RXG (RX Ground)	GND (for RA, RD ground only)		
	13	SPM (Speaker Mute)	Mute input; "Mute: Low"	I	0 or 5V
	14	NC	No Connection		
	15	EXT MON (Monitor SW)	External Monitor input; "Active: Low" *5	I	0 or 5V
	16	EXT PTT (Same as Test SW)	External PTT input "ON: 0V OFF: 5V" *3	I	0 or 5V
	17	SC (Squelch Control)	Squelch status output; "Busy: Low"	O	0 or 5V
	18	NC	No Connection		
	19	TXG (TX Ground)	GND (for TA,TD ground only) *3		
	20	AUXO 1	Programmable Function output 1 *4	O	0 or 5V
	21	AUXO 2	Programmable Function output 2 *4	O	0 or 5V
	22	AUXO 3	Programmable Function output 3 *4	O	0 or 5V
	23	AUXO 4	Programmable Function output 4 *4	O	0 or 5V
	24	AUXO 5	Programmable Function output 5 *4	O	0 or 5V
	25	AUXO 6	Programmable Function output 6 *4	O	0 or 5V

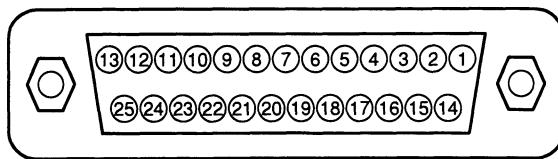

**CONTROL I/O (25pin D-SUB) jack
(Viewed from Back Panel)**

Notes:

*1 Serial data communications with a PC can be done through either front panel 8-pin modular microphone jack or the rear panel 25-pin D-SUB interface connector. Firmware can only be written through the 8-pin modular microphone jack.

Serial Data transmission method

- Full duplex communication
- Asynchronous system (start-stop asynchronous)
- Non-parity check
- Start bit: 1bit, Stop bit: 2bit
- Data: 8bit, LSB output
- Baud rate: 9600bps
- Hardware flow control line not used


Mode	8pin Modular	25pin D-sub
FPU Read/Write	Yes	Yes
FPU Tuning mode	Yes	Yes
Firmware programming	Yes	No
Serial Remote	No	Yes
Real time Monitor	No	Yes

*2 All AUX I terminals (Section 1.3, 1.4), including any AUX I/O programmed as "AUX Input" with the KGP-47D are Active-Low logic.

APPLICATION NOTE

- *3 TD ; TX Data input-transmit signalling (QT / DQT / LTR) input. (Impedance 600Ω)
- TA ; TX Audio input-transmit audio input. (Impedance 600Ω)
- RD ; Receiver detector output non-squelched, non-de-emphasized detector audio output (80mVrms/4.7kΩ)
- RA ; Receiver Audio output-with de-emphasis, filtering and squelched, line level only (not for driving a speaker). (400mVrms/ 4.7 kΩ)
- PTT ; Press-to-Talk-external transmit key line.
- TXG ;TX Ground-common ground.

- *4 The output logic level of all AUX O terminals (Section 1.3, 1.4), including any AUX I/O programmed as "AUX Output" with the KGP-47D may be selected as either Active-High or Active-Low. Note: If Active-Low is selected in KGP-47D, the AUX Output port will be driven temporarily High for about 500ms immediately after a forced reset or when power is first applied. External equipment must have appropriate de-bounce.

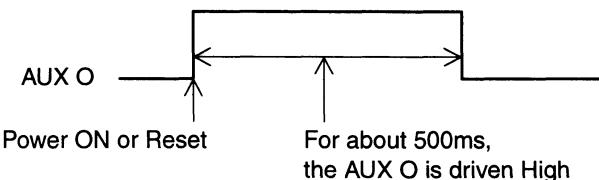

- *5 EXT MON is the same as EXT MON on the REMT I/O (Section 1.4).


1.4. REMT I/O jack

Connector	No.	Terminal Name	Description	I/O	Level
REMT I/O	1	Remote RA (RX Audio output)	Audio output, line level	*1	O 400mVrms
	2	Remote TA (TX Audio input)	Audio input, line level	*1	I 140mVrms
	3	Remote PTT	Remote PTT input (Active-Low)	*1	I 0 or 5V
	4	EXT MON	External Monitor input (Active-Low)	I	0 or 5V
	5	GND	Ground		
	6	AUX I/O 1	External Ch 1 or programmable Function	*2 *3	I/O 0 or 5V
	7	AUX I/O 2	External Ch 2 or programmable Function	*2 *3	I/O 0 or 5V
	8	AUX I/O 3	External Ch 3 or programmable Function	*2 *3	I/O 0 or 5V
	9	AUX I/O 4	External Ch 4 or programmable Function	*2 *3	I/O 0 or 5V
	10	AUX I/O 5	External Ch 5 or programmable Function	*2 *3	I/O 0 or 5V
	11	AUX I/O 6	Programmable Function	*2 *4	I/O 0 or 5V
	12	AUX I/O 7	Programmable Function	*2 *4	I/O 0 or 5V

Notes:

- *1 Remote RA ; Receiver Audio output with de-emphasis to Remote Terminal.(400mVrms/ 4.7 kΩ Load)
- Remote TA ; Transmit audio signal input from Remote terminal.(Impedance 600Ω)
- Remote PTT ; Press-to-Talk for Remote Terminal transmit key.
- *2 AUX I/O 1-5 can be programmed for AUX Input, AUX Output or (BCD) Channel Select.
- AUX I/O 6-7 can be programmed for either AUX Input or AUX Output.
- *3 AUX I/O 1-5: Provides 1 of 32 channel selection via 5 bit Binary Coded Decimal (BCD) on REMT I/O connector.

Select channel	No. 10 9 8 7 6 pin
1	1 1 1 1 1
2	1 1 1 1 0
3	1 1 1 0 1
4	1 1 1 0 0
...	...
29	0 0 0 1 1
30	0 0 0 1 0
31	0 0 0 0 1
32	0 0 0 0 0



REMT I/O jack (Viewed from Back Panel)

APPLICATION NOTE

*4 AUX I/O 6 and 7 can each be modified to sink up 600mA of open collector current. The following modification should be installed when AUX I/O 6 or 7 is used to control external equipment.




1. Program AUX I/O 6 [7] for "AUX Output" in the KGP-47D.
2. Remove D32, R84 and R88 for AUX I/O 6 [D36, R83 and R87 for AUX I/O 7] on the component side of control unit PCB (see diagram below).
3. Install \$Q14, \$Q15 and \$R154 for AUX I/O 6 [\$Q12, \$Q13 and \$R153 for AUX I/O 7] on foil side of control unit PCB (see diagram below).

\$Q12,13,14,15 DTD114EKA

\$R153,154 3.9kΩ (RK73GB1J392J) chip resistor

4. Change R320 for AUX I/O 6 [R319 for AUX I/O 7] from 1kΩ (RK73GB1J102J) to 0Ω (R92-1252-05).

By making this modification, AUX I/O 6 and 7 can now sink up to 600mA each.

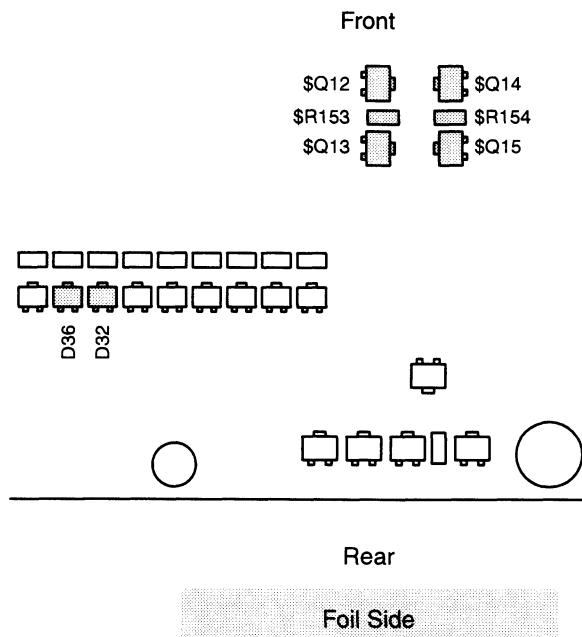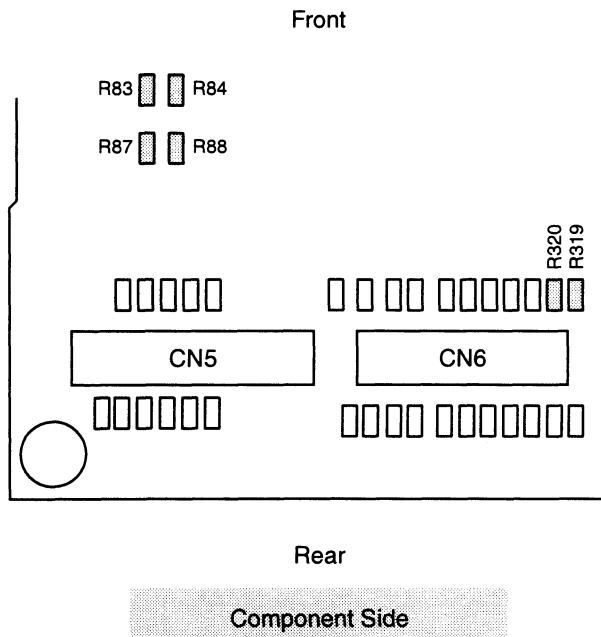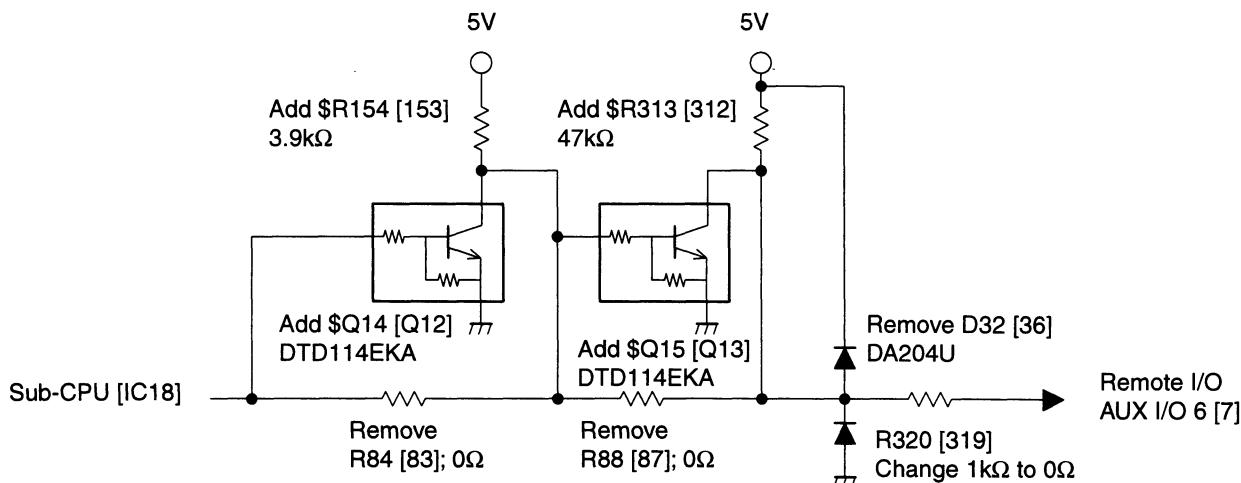


Components having those reference numbers marked as "\$" are not used in this transceiver, although they are described in this service manual for other application purpose.

APPLICATION NOTE

1.5 Connection to External Equipment

	No	Terminal	Remote Termination(VEGA)	Model 38-MAX (ZETRON)	Raider (TRIDENT)
CONTROL I/O	1	NC			
	2	RXD2			
	3	TXD2			
	4	AUXI 1	(F1 to F8 optionally)		
	5	AUXI 2	(F1 to F8 optionally)		
	6	AUXI 3	(F1 to F8 optionally)		
	7	DG		PTT Common	
	8	TD		CTCSS/DCS Encode	TX Data Output
	9	TA		TX Audio	TX Audio Output
	10	RD		Discriminator	RX Discriminator Input
	11	RA			
	12	RXG		RX Ground	
	13	SPM			
	14	NC			
	15	EXT MON			
	16	EXT PTT		PTT No	TX PTT Output
	17	SC		COR	
	18	NC			
	19	TXG		TX Ground	
	20	AUXO 1			
	21	AUXO 2			
	22	AUXO 3			
	23	AUXO 4			
	24	AUXO 5			
	25	AUXO 6			
REMT I/O	1	Remote RA	RX Audio output		
	2	Remote TA	TX Audio input		
	3	Remote PTT	PTT		
	4	EXT MON	MON		
	5	GND	(TX return)		
	6	AUX I/O 1	(F1 to F8 optionally)		
	7	AUX I/O 2	(F1 to F8 optionally)		
	8	AUX I/O 3	(F1 to F8 optionally)		
	9	AUX I/O 4	(F1 to F8 optionally)		
	10	AUX I/O 5	(F1 to F8 optionally)		
	11	AUX I/O 6	(F1 to F8 optionally)		
	12	AUX I/O 7	(F1 to F8 optionally)		
TEST/SPKR	1	B+(AUX)		B+	Power
	2	B+(AUX)	B+		
	3	NC			
	4	GND		GND	Ground
	5	GND	GND		
	6	SPG			
	7	RD			
	8	RSSI			
	9	SPI			
	10	TXCV			
	11	RXCV			
	12	SPO			
	13	VC			
	14	FWD			
	15	EXT REF			

1.6 Controller and Remote Termination Panel Interconnection Diagram

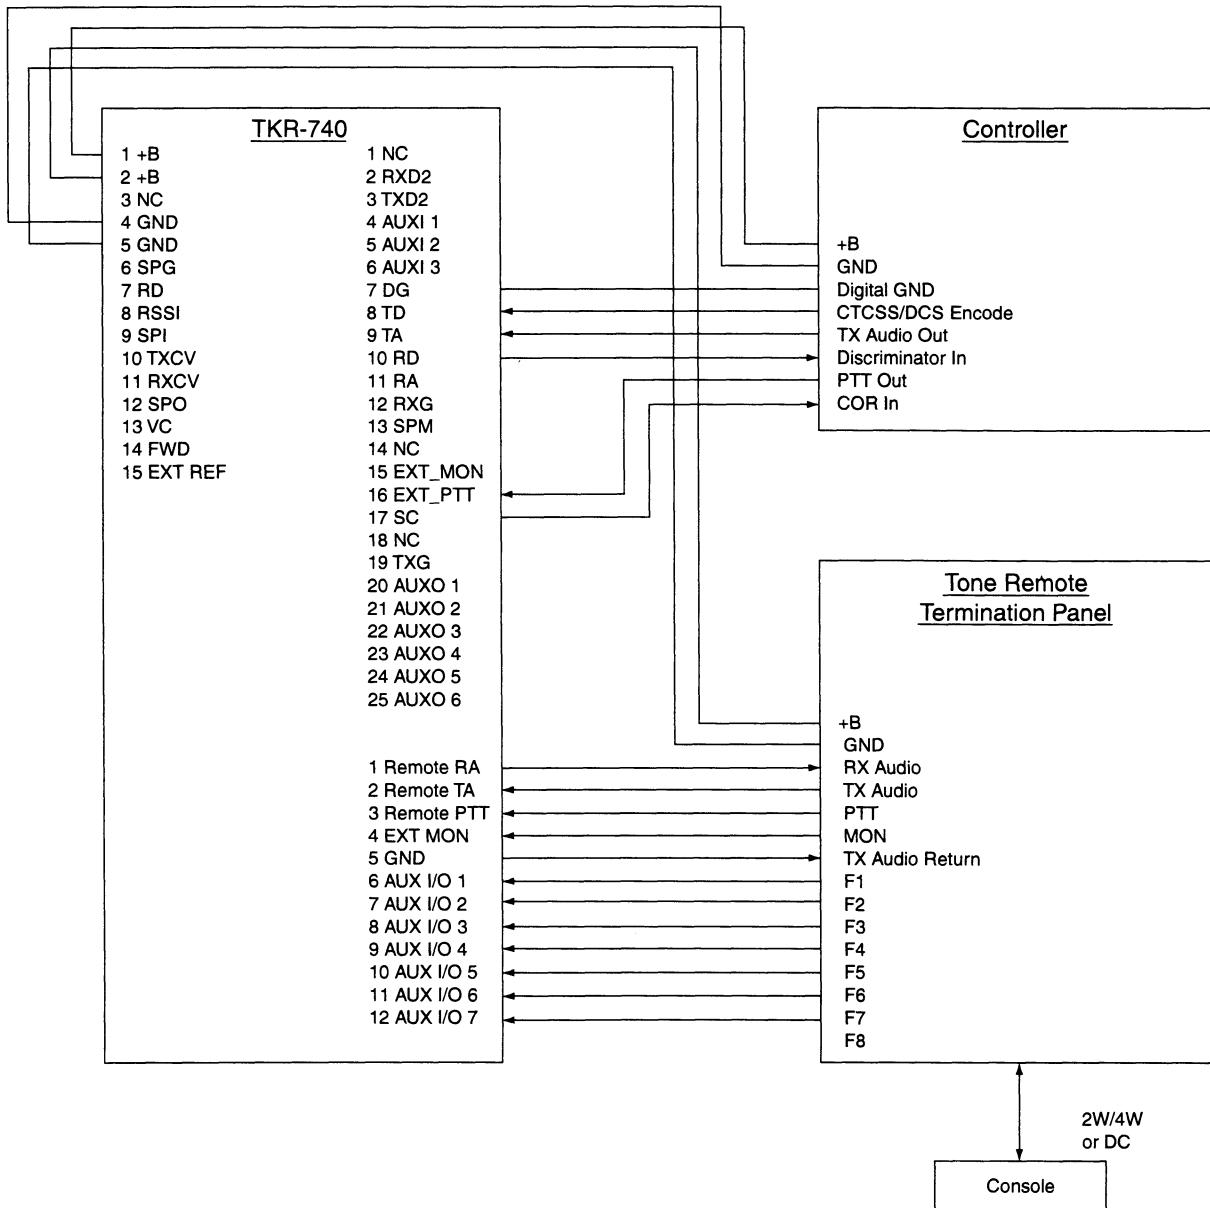

2. TKR-740 Programming Settings with External Equipment

2.1. LTR Logic Controllers

- 1) Program the RX/TX channel frequency but do not set QT/DQT tone/codes..
- 2) Edit the channel data by pressing [F10].
Set: Simplex = "No"; Repeat = "No"; this will override the TKR-740 internal conventional repeater controller function.
- 3) Select Time Out Timer = OFF.
<Edit>→<Optional features>→Time Out Timer "OFF".
- 4) Connect the 25-pin D-sub on TKR-740 to the interface port on LTR controller with a cable.
Layout of 25-pin D-Sub connector is compatible with TKR-740 and TKR-830.
The cable for TKR-830 can be used for TKR-740.
- 5) Adjust a LTR controller (RX data, RPT audio, TX data, etc) according its installation manual.

APPLICATION NOTE

2.2. Intercom Function

The Intercom function allows two communications between a dispatcher at a remote console and the TKR-740 unit at a site via the remote termination unit-to-console audio link. This function operates in repeater or base station mode.

- 1) Connect the 12-pin Remote I/O Connector on TKR-740 to the interface port on Remote Termination unit with a cable.
- 2) Select PTT Priority if desired: Local Mic PTT, Ext. PTT (ext. controller), Remote PTT (remote termination unit), Repeat PTT (TKR-740 internal controller repeat PTT). This allows for example the Remote PTT can take precedent over the Ext. PTT and front panel Local Mic PTT.

<Edit>→<Optional features>→<PTT Priority...>

- 3) Select the audio routing during Intercom operation (Remote, Local or Remote/Local)

<Edit>→<Optional features>→"Intercom Remote/Local"

Remote: Remote TA, transmit audio out from the remote term. unit will be heard in the front panel speaker when the Remote PTT is active even if receiver audio is present. Audio from the Remote TA port will also be transmitted over the air (see 5; TX Disable).

Local: Front panel Local Mic audio will be routed to the Remote RA port (audio input to the remote term. unit) even if receiver audio is present. Audio from the Local Mic will be transmitted over the air (see 5; TX Disable).

Remote/Local:

Remote TA, transmit audio out from the termination unit will be heard in the front panel speaker. Front panel mic audio will be routed to the Remote RA audio input to the remote termination unit, even if receiver audio is present. All audio will be transmitted over the air (see 5 TX Disable). Transmit Audio priority is dependent on the PTT Priority setting.

- 4) Program a front panel PF key or AUX Input to set Intercom ON/OFF.

<Edit>→<Key assignment>→"Intercom ON/OFF"

<Edit>→<Optional features>→<AUX I/O Ports...>→<AUX Input Functions (12-pin & 25-pin)...>→"Intercom On/Off"

- 5) To inhibit Intercom audio from being transmitted over the air, program a front PF key and/or AUX Input to disable transmit during Intercom.

To use the Intercom with Local Mic PTT without keying the transmitter, enable the Local TX Disable function at PF key or AUX Input. This must be manually activated by the Local Mic user.

<Edit>→<Key assignment>→"TX Disable/Enable"

To use the Intercom with Remote PTT without keying the transmitter, enable the Remote TX Disable function at PF key or AUX Input. If a PF key is programmed the Local Mic user must activate this during Intercom operation. If an AUX Input is programmed, a "function" or "auxiliary" function switch on the remote console must be used to activate the

AUX Input (prog. for Remote TX Disable) during Intercom operation.

<Edit>→<Optional features>→<AUX I/O Ports...>→<AUX Input Functions (12-pin & 25-pin)...>→"TX Disable/Enable"

2.3. Setting for Voting system

- 1) The Voting Tone is output from the RA port of the 25-pin D-sub and interfaced with the audio link of the systems voting Comparator unit. This link may be a dedicated telco line or an RF link such as a point-to-point microwave or conventional analog FM link. (Note: The voting tone will also be output through the Remote RA audio port. If Intercom operation is activated then Local Mic audio will be outputted. Do not use the Remote RA port for the voting output when Intercom operate).

- 2) Program the voting tone frequency by pressing PF2 or space bar.

<Edit>→<Optional features>→<Voting tone>→"1950"
Note: Set to "Disable" for non-voter system use.

- 3) A front panel key can be programmed for a Voting Tone On/Off function for service and test purposes.

<Edit>→<Key assignment>→<PF key >→"Voting Tone ON/OFF"

2.4. Digital Paging systems

The TKR-740 can be used as a continuous-duty paging transmitter. It has a direct carrier frequency shift input for bi-level type paging protocols such as POCSAG (note this is not for quad-level formats such as Motorola Flex).

1. Program the Digital Paging Input as "Enable":

<Edit>→<Optional features>→<Digital Paging Input>→"Enable"

When this function is set to "Enable", AUX Input 2 is automatically assigned as the "Digital Pager PTT" and AUX Input 3 is automatically assigned "Digital Pager Data".

Digital Pager Data Input level (AUX Input 3):

+5.30V > High >+4.0V

-0.30V < Low < +1.00V

Digital Pager PTT Input (AUX Input 2): Active Low

Baud Rate: Less than 2400 bps

Frequency Shift Polarity:

High: -4.5 kHz ±0.5 kHz shift

Low: +4.5 kHz ±0.5 kHz shift

Adjust the Digital Pager Deviation at 137 digit in FPU for 4.5kHz shift.(0 digit; 0 kHz 255 digit; 8.4kHz)

Caution ;Pin5(AUX Input 2) on the 25-pin D-Sub connector corresponds to a RS-232C CTS. when Digital Paging Input is "Enable" and the 25-pin D-Sub on TKR-740 is connected to the serial port on PC with a 25-pin D-Sub straight cable, note that TKR-740 is likely to transmit.

3. Internal I/O Terminal Description

The TKR-740 has internal connection terminals for adding internal option boards such as voice encryption /scramblers boards, ANI encoders and tone encoders (two-tone, burst, 5-6 tone, etc.).

APPLICATION NOTE

3.1. Internal I/O Terminal Description

Terminal Name	Description	I/O	Level
B	Power Source	O	13.8V
GND	GND		
TXI	TX audio output to optional board	O	35mVrms @ 3kHz Deviation
TXO	TX audio input from optional board	I	
RXI	RX audio output to optional board	O	200mVrms @ 1kHz Mod 60% Dev
RXO	RX audio input from optional board	I	
DETI	Discriminator output to optional board	O	170mVrms @ 1kHz Mod 60% Dev
DETO	Discriminator input from optional board	I	
ANI	TX ANI input	I	15mVrms input
PTTI	PTT output to optional board	O	Mic PTT ON ; 0V OFF ; 5V
PTTO	PTT input from optional board	I	
TESTI	Ext.PTT output to optional board	O	Ex PTT or TEST SW ON ; 0V OFF ; 5V
TESTO	Ext.PTT input from optional board	I	
RPTTI	Remote PTT output to optional board	O	Remote PTT ON ; 0V OFF ; 5V
RPTTO	Remote PTT input from optional board	I	
OPTION	Enable/Disable scrambler board	O	Scrambler ON ; 5V Scrambler OFF(normally) ; 0V
CODE1	Scrambler code setting	O	0V or 5V
CODE2	Scrambler code setting	O	0V or 5V
CODE3	Scrambler code setting	O	0V or 5V
CODE4	Scrambler code setting	O	0V or 5V

3.2. Connection to Optional Boards

Terminal Name	SC20-460(Transcrypt)	CDEU-1(Cimarron)	ID-12(CSC)
B	+V	+B	Power Supply
GND	GND	GND	GND
TXI	TXIN	*1	
TXO	TXOUT	*1	
RAI	RXOUT	*2	SIDE TONE*4
RAO	RXIN	*2	
DETI	(RXOUT)	*3	
DETO	(RXIN)	*3	DATA IN
ANI		DATA OUT	AUDIO OUT
PTTI		PTT	*5 PTTIN *5
PTTO	PTT	KEY	*5 PTTOOUT *5
TESTI		(PTT)	*6 (PTTIN) *6
TESTO	(PTT)	*6 (KEY)	*6 (PTTOOUT) *6
RPTTI		(PTT)	*7 (PTTIN) *7
RPTTO	(PTT)	*7 (KEY)	*7 (PTTOOUT) *7
OPTION	SCRAMBLE		
CODE1	Binary 1		
CODE2	Binary 2		
CODE3	Binary 4		
CODE4	Binary 8		
AUX I/O		EMER	*8
AUX I/O		CH BUSY	*9
SPM		MUTE	*10

APPLICATION NOTE

Notes:

- *1 Remove R117.
- *2 Remove R118.
- Note: RAI and RAO (de-emphasized squelch controlled audio) should be used for the receive audio in/out for an encryption or scrambler board.
- *3 Remove R120
Note: When DETI and DETO are used, (bypasses de-emphasized squelch controlled audio) the TKR-740 can not decode QT/DQT because the scrambler board will not pass sub-audible tones. If the scrambler board modification is need due to use of RAI and RAO, refer to its manufacturer's Installation manual.
- *4 If ANI side tone is to be output from an external speaker, connect the ANI board side tone output line to terminal RAI. If side tone output is to output from the front panel local speaker, connect the board side tone output line to IC45, pin 2 (IC45 device: LA4422).

- *5 Remove R115.
- *6 When using an EXT PTT, connect the PTT wires of option board to TESTI/TESTO terminal.
Remove R116.
- *7 When using a Remote PTT, connect PTT wires of option board to RPTTI/RPTTO terminal..
Remove R114.
- *8 An external switch may be connected to an AUX I (I/O) if an emergency function is required.
- *9 Some ANI boards have a "channel busy" input line. Use an AUX (I/O) programmed as Carrier Operated Relay or Tone Operated Relay (COR or TOR) output may be used (alternative: use the Squelch Control (SC) line on the 25 Pin D-sub).
- *10 Some ANI boards have a "speaker mute" output line. Use the SPM line on the 25 Pin D-sub.

4. FPU Setting For Optional Board

Voice scrambler

- 1) Select each item to enable for scrambler unit.
 <model>→<TKR-740>→<146-162>→<Voice Scrambler>→"OK"
- 2) Select the channel(s) which will use scramble mode and then press [F10].
 Select a voice scrambler code address (1-of-16, 4 bit BCD) if necessary.
- 3) Assign the "Scrambler On/Off" function to front panel any PF key or AUX Input.
 <Edit>→<Key Assignment>→[PF 2]→"Scrambler On/Off"
 <Edit>→<Optional features>→<AUX I/O ports...>→<AUX Input Functions(12-pin & 25-pin...>→<AUX In>

The scrambler function is primarily designed for TKR-740 base station operation. However if used in repeater operation, be aware that the repeated audio operation differ between the RAI/RAO and DETI/DETO terminals. When RAI/RAO are used, de-scrambled (clear) audio will be heard from the local speaker and scrambled audio will be transmitted over the air; RAI/RAO are the preferred scrambler receiver audio connection terminals. When DETI/DETO are used, de-scrambled (clear) audio will be heard from both the local speaker and transmitted over the air. Since the repeated audio should leave the repeater scrambled (in most applications), it is recommended to use the RAI and RAO.

CIRCUIT DESCRIPTION

1. Outline

- The TKR-740 is a VHF repeater operating in the 136-174MHz frequency range. It has the following features:
- High-performance model with enhanced features.
 - 32 channel radio with 16 QT / DQT.
 - Remote functions for use by base stations.
 - Fine frequency steps using Direct Digital Synthesizer (DDS).
 - Signaling decoding and AF processing using Digital Signal Processor (DSP).

2. Transmitter Unit

The transmitter unit (X56-304 A/3) consists of the following circuits: (1) internal/external reference circuit, (2) transmitter reference PLL circuit, (3) transmitter DDS circuit, (4) transmitter main PLL circuit, (5) driver circuit, (6) modulation level adjustment circuit, and (7) other circuits.

2.1 Internal/external reference circuit

The internal/external reference circuit switches between the internal +/-1.0ppm/20MHz TCXO (X101) and the 10MHz external reference automatically. If there is no external reference signal applied to the unit, the internal TCXO is used as the reference frequency. When an external reference (10MHz/-10dBm or higher) is applied, the external reference is automatically used as the reference frequency. The circuit consists of Q102, Q106, XF210, Q109, D101, D103, Q15, X101, Q205, D205, Q206, IC204, Q110, Q114, Q112, Q113, Q108, XF211, and Q115.

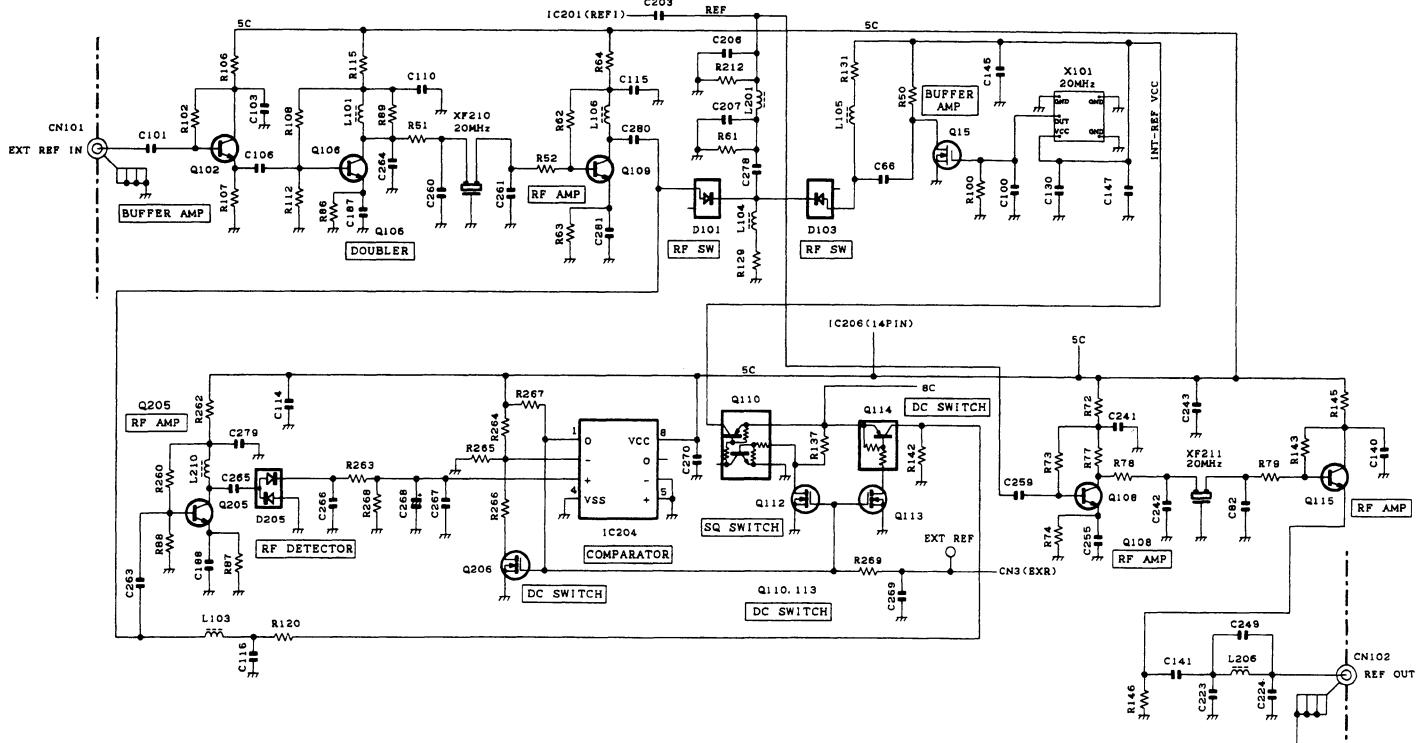


Fig.1 Internal/external reference circuit

2.2 Transmitter reference PLL circuit

The transmitter reference PLL circuit generates the reference frequency signal (19.2MHz) for the transmitter DDS and modulates the low-frequency components of QT and DQT. This circuit consists of IC201, X201, Q201, and Q202. The VCO consists of Q201, X201, D203, D201, and D202.

The signal generated by the VCO is fed to buffer amplifier Q202 and unwanted harmonics are removed with an LPF. The resulting signal goes to the PLL IC (IC201), and its phase is

compared with that of the reference frequency using the comparison frequency of 200 kHz. The phase difference signal is converted to a DC voltage by a lag-lead type loop filter. The capacitance of D201 and D204 are varied by the DC voltage to keep the VCO oscillator frequency at 19.2MHz. The 19.2MHz oscillator signal is fed to Q241 and used as the reference frequency signal for the transmitter DDS.

CIRCUIT DESCRIPTION

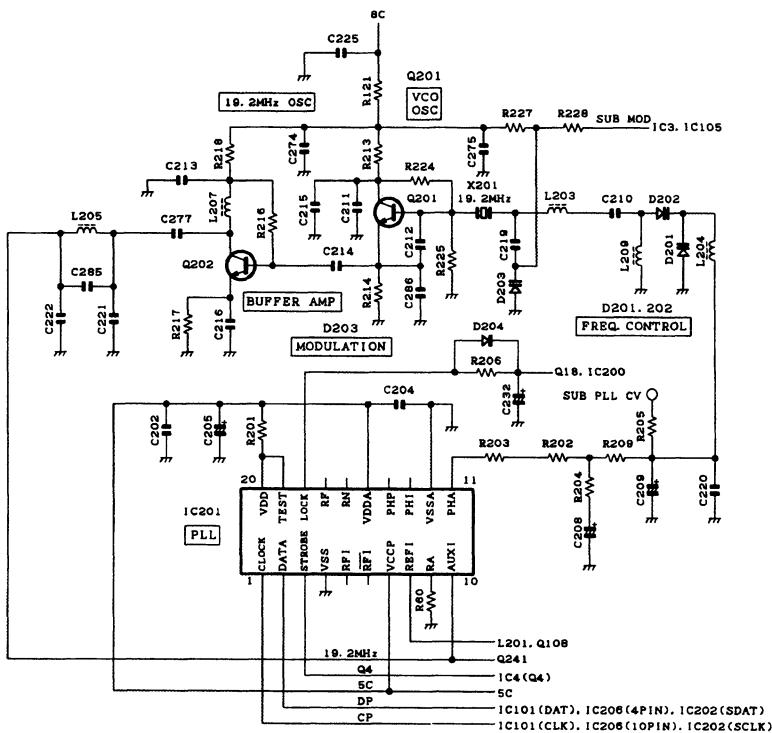


Fig.2 Transmitter reference PLL circuit

2.3 Transmitter DDS circuit

The transmitter DDS circuit produces the reference frequency signal (4.5 MHz) for the transmitter main PLL and modulates the low-frequency components of digital pager modulation. This circuit consists of Q241, IC202, IC107, Q207, Q240, and Q242. The 19.2MHz signal coming from the transmitter sub PLL is amplified by Q241 and fed to IC202. IC202 produces the 4.5MHz reference frequency signal for the transmitter main PLL based on the 19.2MHz signal. Since the comparison frequency of the transmitter main PLL is 100 kHz, the PLL frequency step is 100 kHz. However, fine

frequency steps, such as 2.5kHz and 1.25kHz, can be used because the DDS output frequency is variable. IC202 performs binary FSK modulation. Digital pager modulation is implemented by applying low-range modulation to DDS and high-range modulation to the transmitter main PLL. There is a two-stage Butterworth filter (cutoff frequency: 3.2kHz) consisting of IC102 in the high-range modulation line. The IC102 shift input is delayed by IC107 and IC207 to maintain phase balance between the low and high ranges. (See the level adjustment circuit description.)

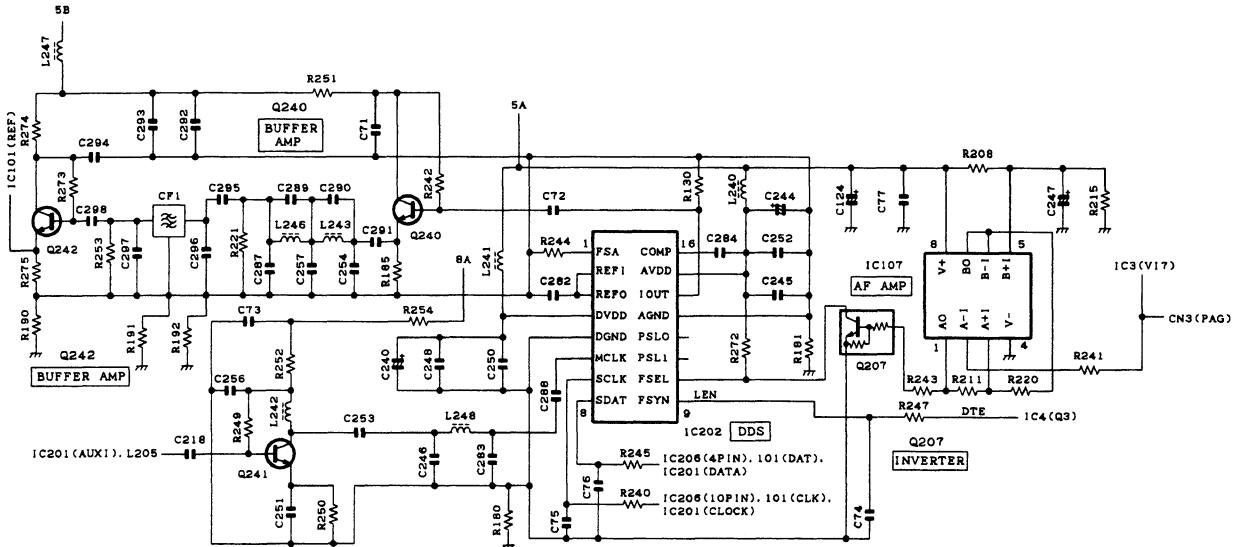


Fig.3 Transmitter DDS circuit

CIRCUIT DESCRIPTION

2.4 Transmitter main PLL circuit

The transmitter main PLL circuit produces the transmitter frequency signal and consists of VCO (Q1 and Q2) and a single-chip PLL IC (IC101). Transmit frequencies from 136.000 MHz to 154.995 MHz are derived from VCO Q1. Transmit frequencies from 155.000 MHz to 174.000 MHz are derived from VCO Q2.

IC101 divides the VCO oscillator signal and the transmitter PLL reference signal (4.5 MHz) and its phase is compared

with the 100kHz comparison frequency. The phase difference signal is converted to a DC signal with a lag-lead type loop filter. The DC signal is applied to varicap D1, D3, D2, D4 to lock the VCO oscillator frequency with the desired oscillator frequency. At the same time, the DC signal passes through the IC109 operational amplifier and buffer amplifier, and is output as a voltage signal (CVT) for monitoring the transmitter main PLL lock voltage.

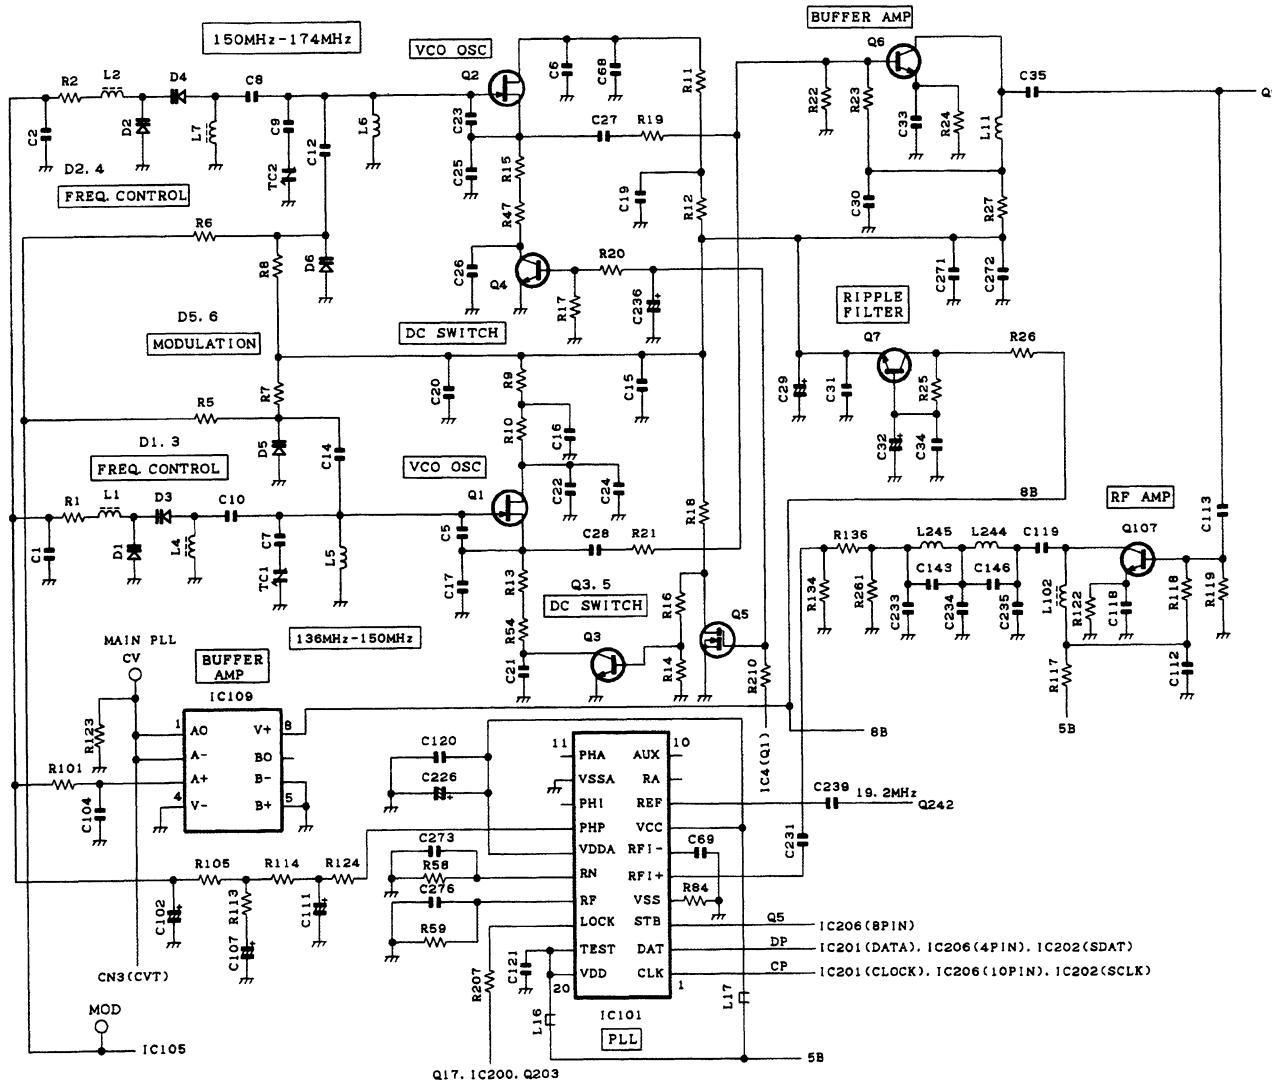


Fig.4 Transmitter main PLL circuit

2.5 Driver circuit

The Driver circuit amplifies the transmitter frequency signal to the level required for input to the final unit (X56-304 B/3). This circuit consists of RF amplifier Q9, RF switch D7, RF amplifier Q13, RF amplifier Q14, and switches Q203, Q8, Q12, and Q11.

The transmitter signal level input to Q13 is about 0 dBm (1 milliwatt). Since it is amplified by about 15 dB by Q13, and also amplified by about 13 dB by Q14, the output from Q14 becomes about 630 milliwatts. After being attenuated by attenuators R257, R258, and R259, the net output is +22 dBm (160 milliwatts) at drive output connector CN1.

CIRCUIT DESCRIPTION

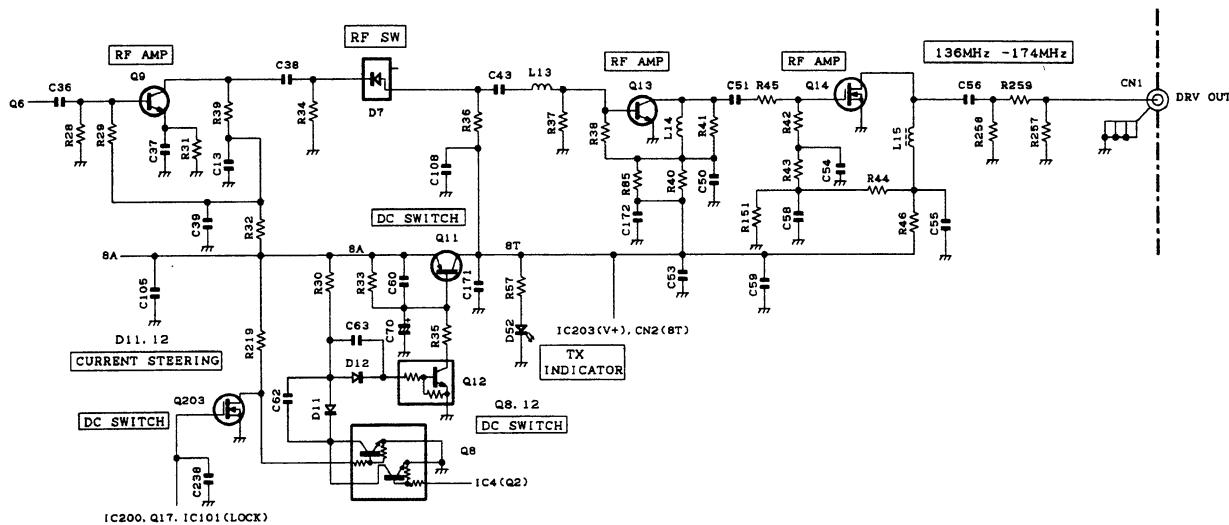


Fig.5 Driver circuit

2.6 Modulation level adjustment circuit

The level adjustment circuit adjusts the modulation signal level to provide the required level of modulation and adjusts the transmitter output power. This circuit consists of IC105, IC3, IC100, IC102, IC203, Q208, and Q21. IC3 is an electronic volume control IC. The signaling frequency change adjustment, signaling modulation balance adjustment, digital pager modulation waveform balance adjustment, maximum AF Dev. change, and the reference voltage setting for transmitter power adjustment are performed according to data from the CPU

using the FPU. IC105 is a modulation signal summing amplifier (A/2) and a signaling signal amplitude fine-adjustment amplifier (B/2). IC102 is a splatter filter for digital pager modulation and has a two-stage Butterworth filter with a cutoff frequency of 3.2kHz. IC203 is a DC amplifier that amplifies the transmitter power reference voltage generated by IC3. Q21 outputs 5 V to the final unit as an H/L signal when the transmitter power mode is "LOW" and outputs 0 V when the transmitter power mode is "HIGH".

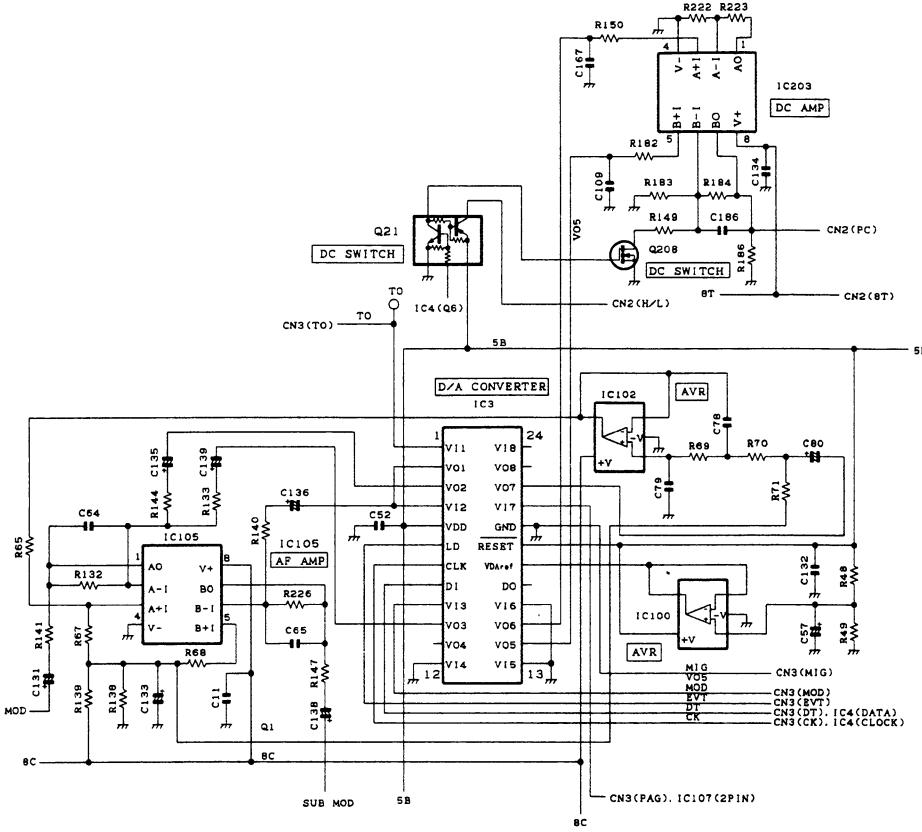


Fig.6 Modulation level adjustment circuit

TKR-740

CIRCUIT DESCRIPTION

2.7 Other circuits

In addition, IC106 is an EEPROM. The transmitter adjustment data adjusted for each unit is written into the EEPROM. If the unit is installed in another set, it is not necessary to adjust it again from the beginning, but only fine-adjustment is necessary for each unit.

IC1, IC2, IC103, IC108, IC205, and IC110 are three-pin AVR ICs. Each circuit contains its own power regulator IC to maintain isolation between circuits.

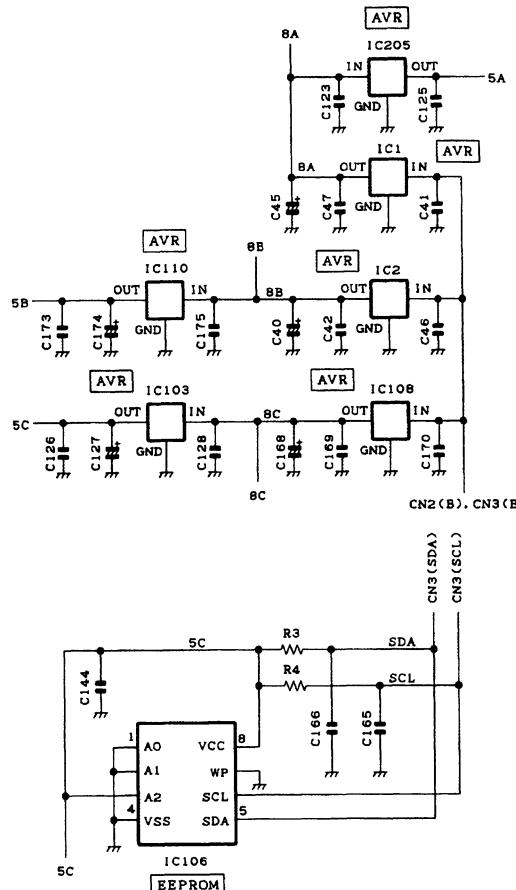


Fig.7 Other circuits

3. Final Unit

The RF final amplifier unit (X56-304 B/3) amplifies transmitter power to a specified level. This unit consists of the following circuits: (1) Transmitter power module, (2) harmonic filter circuit, (3) forward/reflected power detector circuit, (4) APC circuit, (5) high temperature detector circuit, (6) common mode spurious filter circuit and (7) AVR circuit.

3.1 Transmitter power module

The power module IC301 uses a low power module M68776 to improve its efficiency. The driver output of the transmitter unit passes through an attenuator and enters power module IC301 on its pin 1. Power module IC301 amplifies the RF power according to the voltage at the amplification control pin 2 (VGG) and outputs it on pin (RFO).

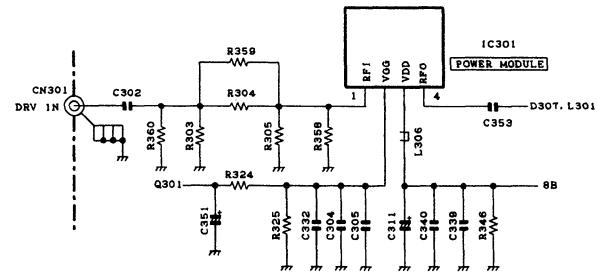


Fig.8 Transmitter power module

3.2 Harmonic filter circuit

The harmonic filter circuit uses a three-stage "pi" type Chebyshev type LPF consisting of L301, L302, L303, C307, C312, C315,C316, C336, C337, and C338. This circuit removes harmonics from the transmitter output and sends the filtered signal to the forward/reflected power detector circuit.

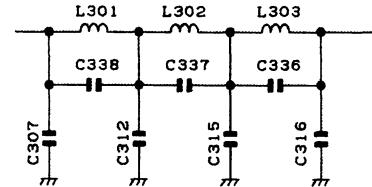


Fig.9 Harmonic filter circuit

3.3 Forward/reflected power detector circuit

The forward/reflected power detector circuit consists of a CM coupling type detection circuit formed by a strip line and a DC amplifier IC303 (A/2, B/2), which are used in high-power mode, and a capacitance coupling double-voltage detector circuit and DC amplifier IC302 (A/2), which are used in low-power mode. The transmitter power which passes through the strip line is output from CN308.

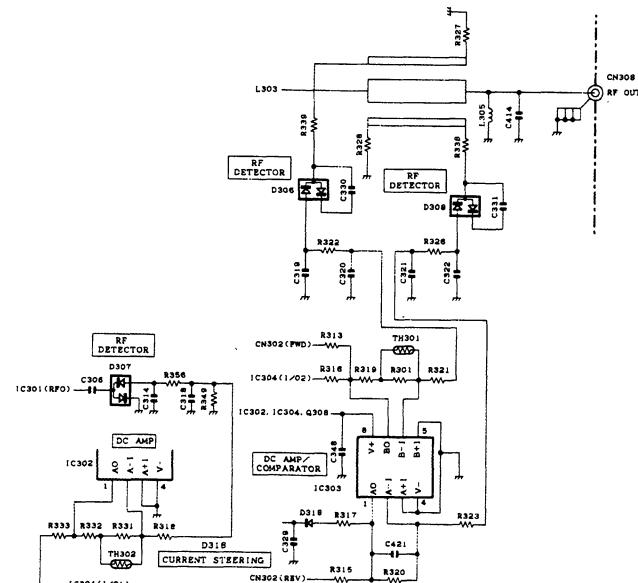


Fig.10 Forward/reflected power detector circuit

CIRCUIT DESCRIPTION

3.4 APC circuit

The APC circuit consists of differential amplifier IC302 (B/2), DC amplifier Q301, analog switch IC304, and switching transistors Q312, Q304, and Q313. The high-power/low-power detector values are switched by analog switch IC304. The power setting range in the high-power mode is 1 to 5 W; the power setting range in the low-power mode is 100 milliwatts to about 1 W.

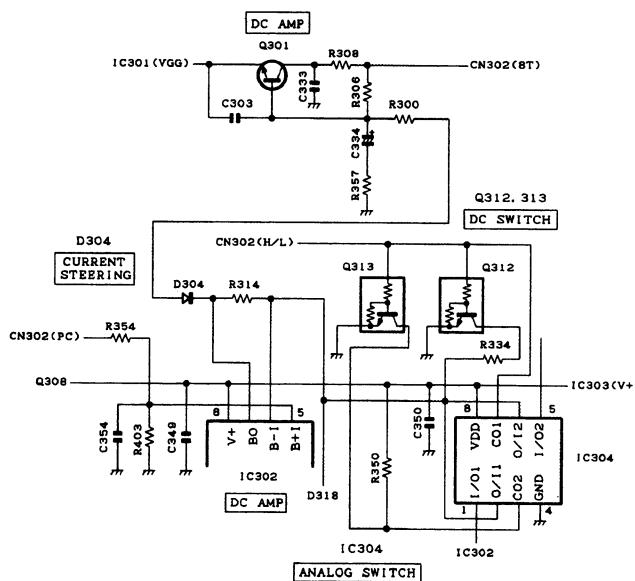


Fig.11 APC circuit

3.5 High temperature detector circuit

The high temperature detector circuit consists of thermal switch TS301 and switching transistor Q302. This circuit disables the transmitter power amplifier to protect the circuits when the final unit temperature is too high (95 °C or higher) and the circuit cannot be operated safely.

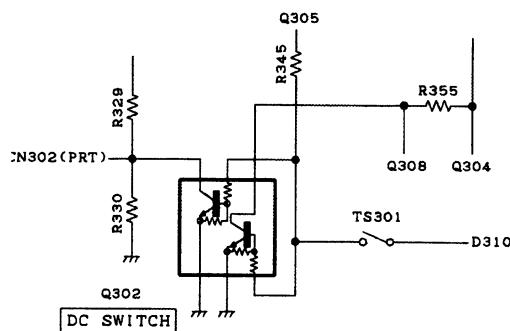


Fig.12 High temperature detector circuit

3.6 Common mode spurious filter circuit

The TKR-740 has a filter L304 at the DC power line inlet in the final unit to reduce common mode radiation from the power cable.

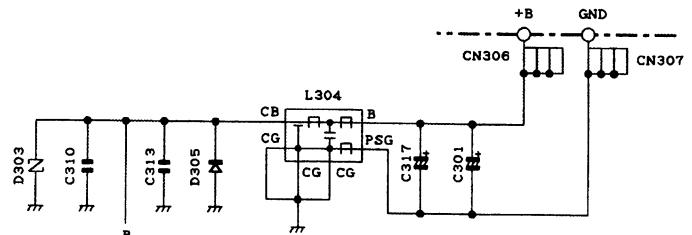


Fig.13 Common mode spurious filter circuit

3.7 AVR circuit

The AVR circuit provides the power supply voltage required to operate power module IC301. This circuit consists of Q306, Q307, D312, Q309, Q310, Q305, and D317. For continuous-duty operation, there are two large-current AVRs with discrete outputs for the power module using low-heat-resistant power transistor 2SB951A to prevent concentration of heat. The 8V AVR is controlled by 8T, and a time constant is set at the beginning of output to start the transmitter power amplifier smoothly and prevent RF splatter.

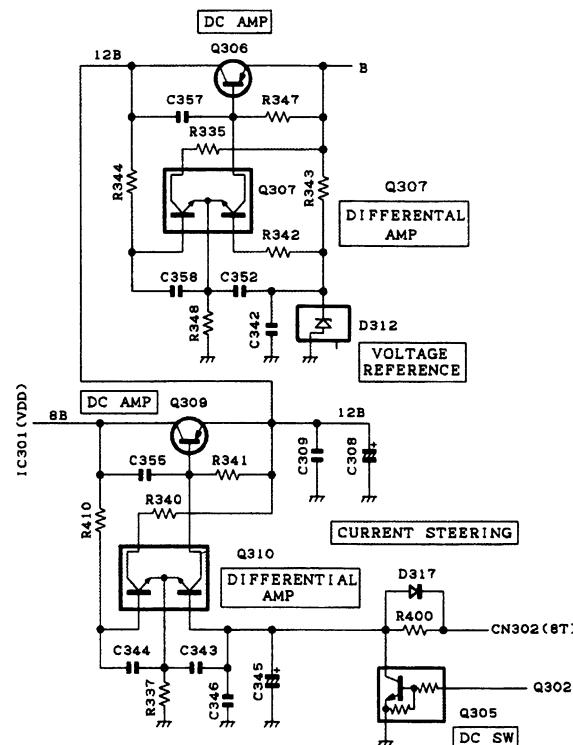


Fig.14 AVR circuit

TKR-740

CIRCUIT DESCRIPTION

4. Receiver Unit

The receiver unit (X55-305) consists of the following circuits: (1) front-end circuit, (2) narrow IF circuit, (3) wide IF circuit, (4) receiver main PLL circuit, (5) receiver DDS circuit, (6) baseband circuit, and (7) other circuits.

4.1 Front-end circuit

The front-end circuit consists of BPF L3, RF amplifier IC17, BPF L16, mixer DBM A1, and IF switch D10. The helical BPF covers frequency ranges 146.000 to 162.000 MHz (K1), 158.000 to 174.000 MHz (K2), and 136.000 to 150.000 MHz (K3), with a passband of 3.0 MHz.

BPF L16 attenuates the unwanted out-of-band RF components produced by RF amplifier IC17 and sends only

the desired signal to mixer DBM A1. Mixer DBM A1 mixes the first local oscillator signal generated by the first local crystal oscillator with the receive signal coming from the helical BPF L16 to produce the first IF signal (44.85MHz). The first IF signal is fed to the narrow IF or wide IF circuit (depending on programming) by switch D10.

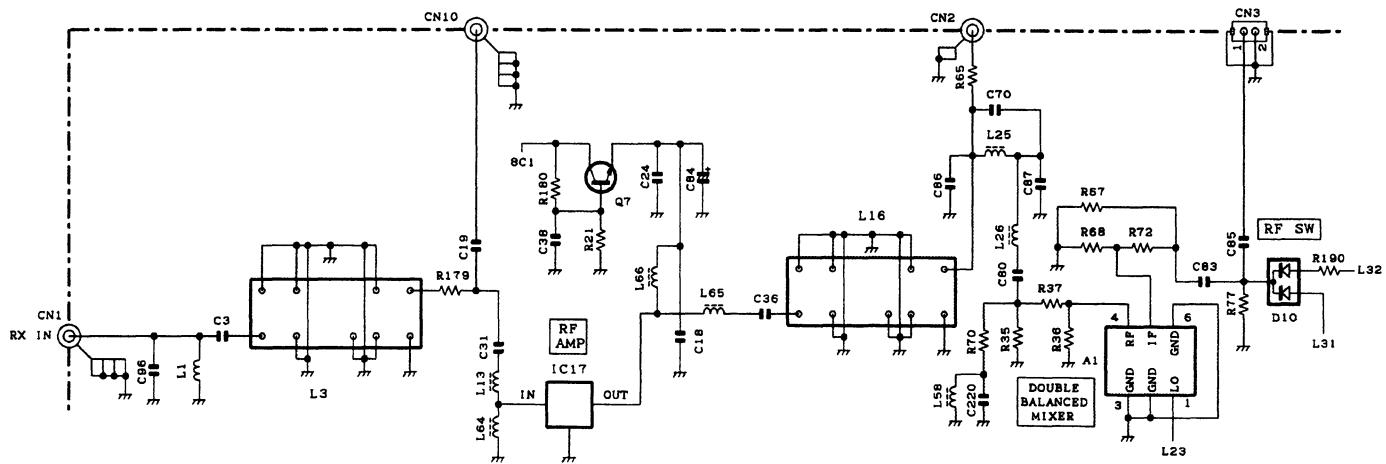


Fig.15 Front-end circuit

CIRCUIT DESCRIPTION

4.2 Narrow IF circuit

The narrow IF circuit consists of two-pole MCF XF2, four-pole MCF XF4, IF amplifier Q25, IF amplifier Q32, FM detector IC IC7, crystal oscillator X1 and ceramic filters CF1, CF3. The unwanted components of the signal are removed by two-pole MCF XF2 and four-pole MCF XF4, and the resulting signal is amplified by IF amplifiers Q32. The FM IC IC7 produces the second IF signal (450 kHz), ceramic filters CF1 and CF3 remove unwanted components and an IF amplifier amplifies the signal, and the quadrature detector circuit FM-detects the signal to produce a baseband signal and outputting it to pin 15.

The baseband signal passes through analog switch IC18, inversion amplifier IC15 (B/2), AF amplifier IC11 (A/2 and B/2), and goes to the Y0 input of multiplexer IC9 and the V2

input of electronic volume control IC9. The level of the signal that enters V2 of the electronic volume control IC is adjusted, the signal passes through the hysteresis circuit AF switch Q34, goes to IC7 noise filter input (pin 17), and high-frequency components are selected by an HPF consisting of an external RC network. The signal is noise-detected and compared, and the noise squelch signal (N-DET) is fed to DC switch Q36. The signal strength analog voltage (RSSI) from the two second IF amplifiers in IC7 is compared with the reference voltage set by electronic volume control V4 by the internal RSSI comparator, and the RSSI squelch signal (C-DET) is output from pin 20 of IC7. C-DET enters DC switch Q37 and is ANDed with the N-DET by DC switch Q38. A squelch signal (SC) is output from connector CN6.

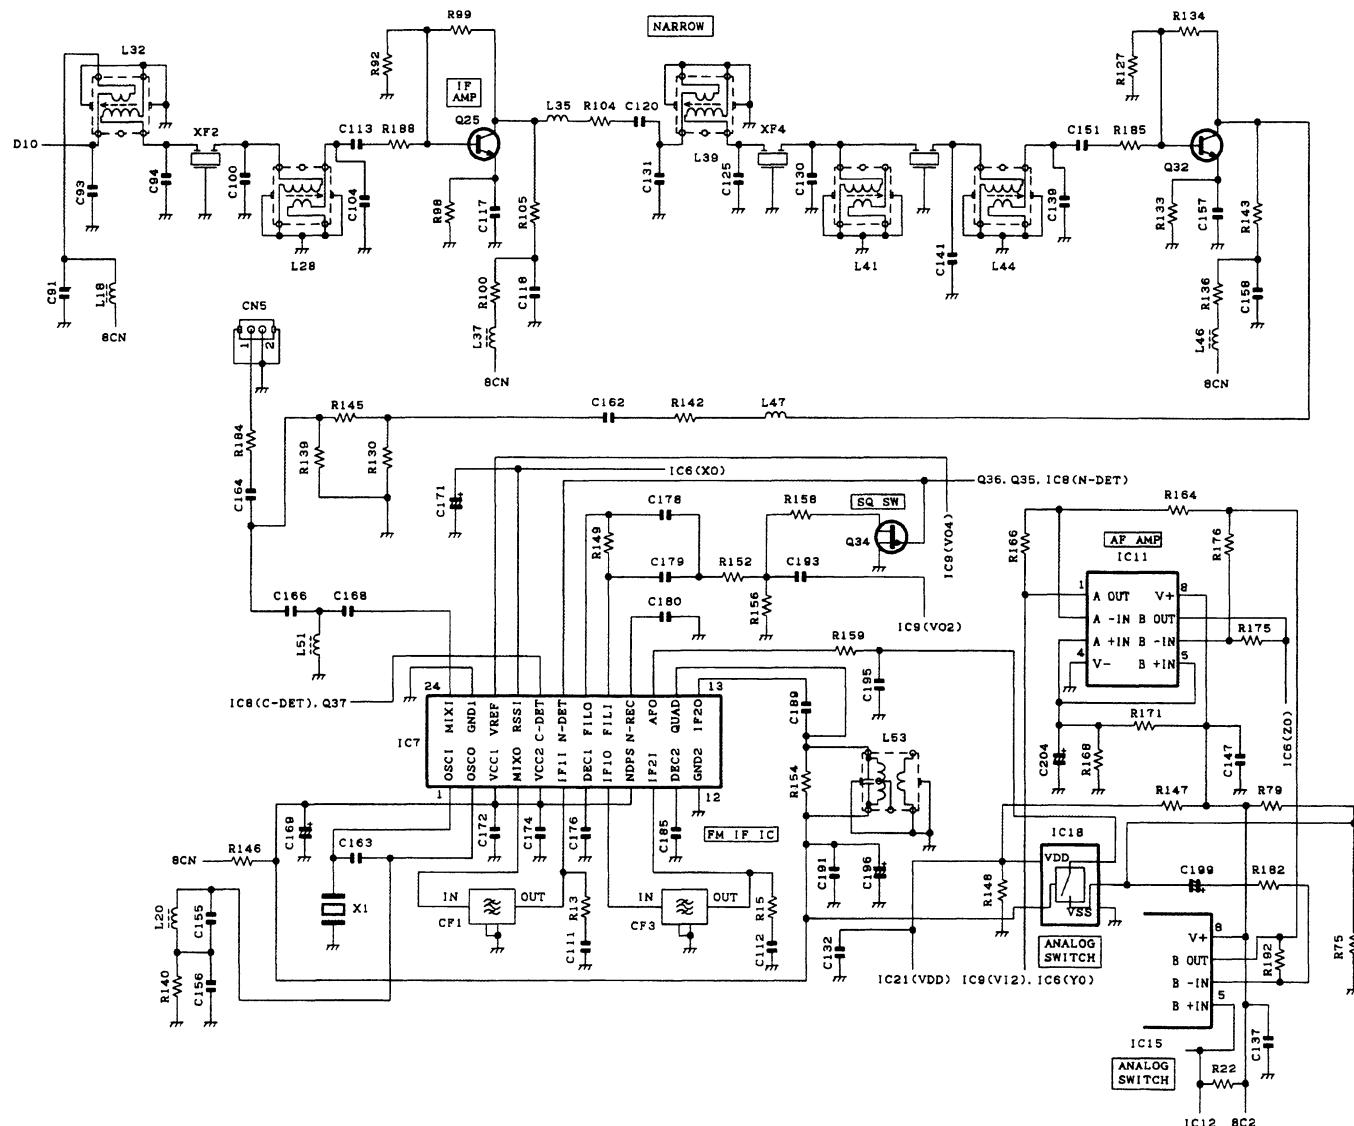


Fig.16 Narrow IF circuit

TKR-740

4.3 Wide IF circuit

The wide IF circuit consists of two-pole MCF XF1, four-pole MCF XF3, IF amplifier Q24, IF amplifier Q31, FM detector IC IC8, crystal oscillator X2, ceramic filter CF2, CF4. The unwanted components of the signal are removed by two-pole MCF XF1 and four-pole MCF XF3 and the resulting signal is amplified by IF amplifiers Q24 and Q31. The second IF signal (450 kHz) is produced by FM detector IC IC8. Unwanted components of the second IF signal are removed by ceramic filter CF2, CF4, and the resulting signal is amplified by the built-in IF amplifier and FM-detected by the quadrature detection circuit to generate a baseband signal. This signal is output from pin 15. It then passes through analog switch IC21, invert amplifier IC15 (A/2) and AF amplifier IC12 (A/2) and goes to the Y1 input of multiplexer IC and the V1 input of electronic volume control IC9.

The level of the signal that enters V1 of the electronic volume control IC is adjusted, the signal passes through AF switch Q35, goes to IC8 noise filter input (pin 17), and high-frequency components are selected by an HPF consisting of an external RC network. The signal is noise-detected and the compared noise squelch signal (N-DET) is fed to DC switch Q36. The signal strength analog voltage (RSSI) from the two second IF amplifiers in IC8 is compared with the reference voltage set by electronic volume control V3 by the internal RSSI comparator, and the RSSI squelch signal (C-DET) is output from pin 20 of IC8. C-DET enters DC switch Q37 and is ANDed with the N-DET by DC switch Q38 and output as a squelch signal (SC).

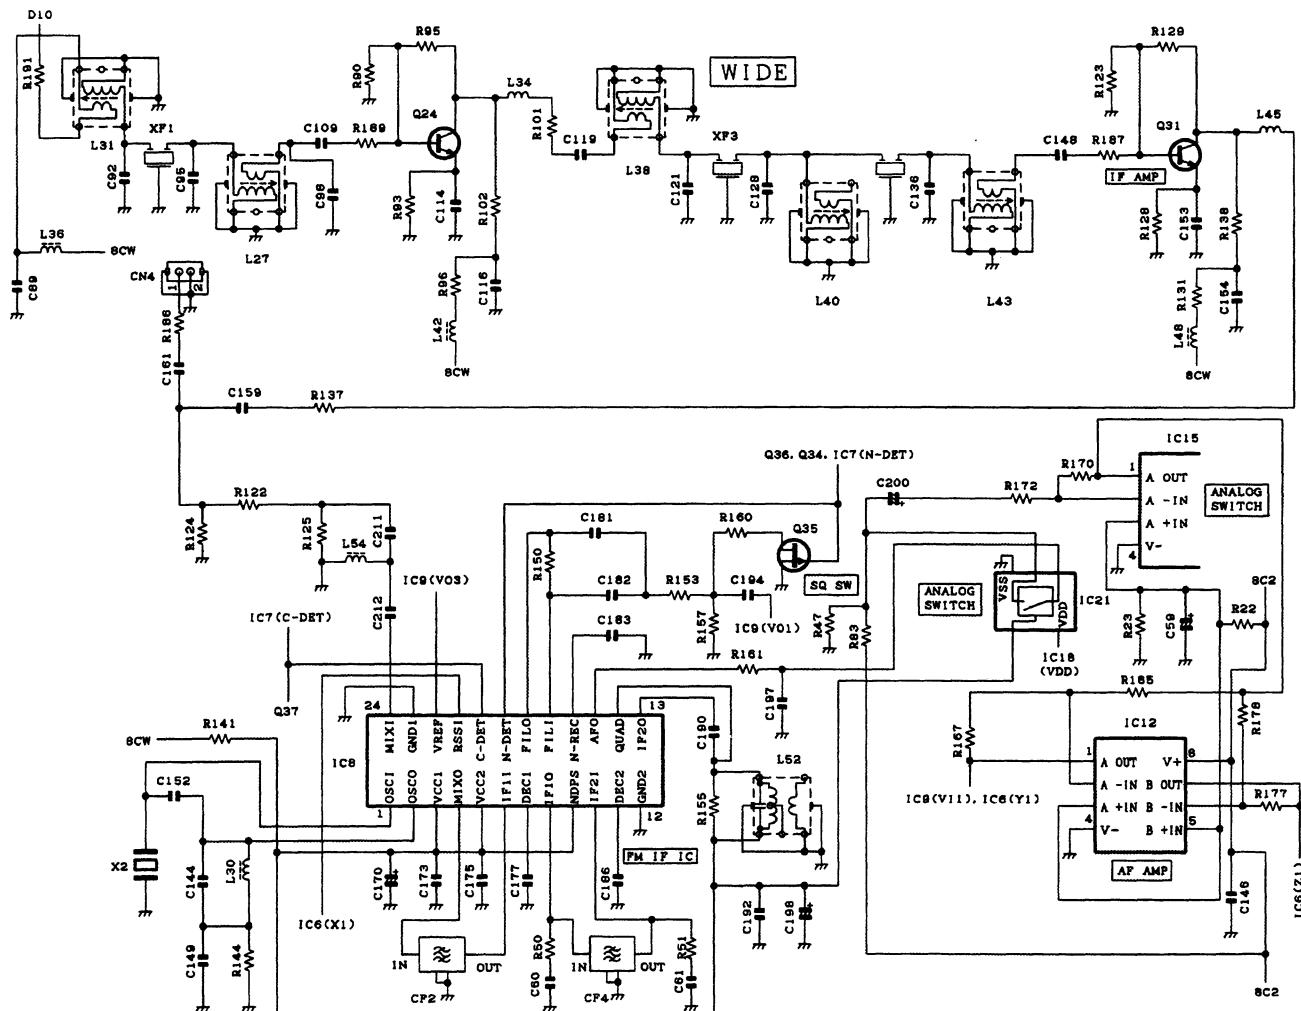


Fig.17 Wide IF circuit

CIRCUIT DESCRIPTION

4.4 Receiver main PLL circuit

The receiver main PLL circuit consists of VCO (Q8, Q9) and a single-chip PLL IC IC1, buffer amplifier Q14, RF amplifier Q3, Q1, Q5, and Q6. The first local oscillator is an upper heterodyne local oscillator, and the VCO oscillator frequency is 198.850 to 206.850 MHz (K1), 202.850 to 218.850 MHz (K2),

and 180.850 MHz to 194.850 MHz (K3). In addition, the two VCOs cover two bands: the Q8 VCO covers the lower band and the Q9 VCO covers the upper band. PLL IC1 compares the 4.5MHz signal from the receiver DDS circuit and the VCO signal with the 100kHz comparison frequency.

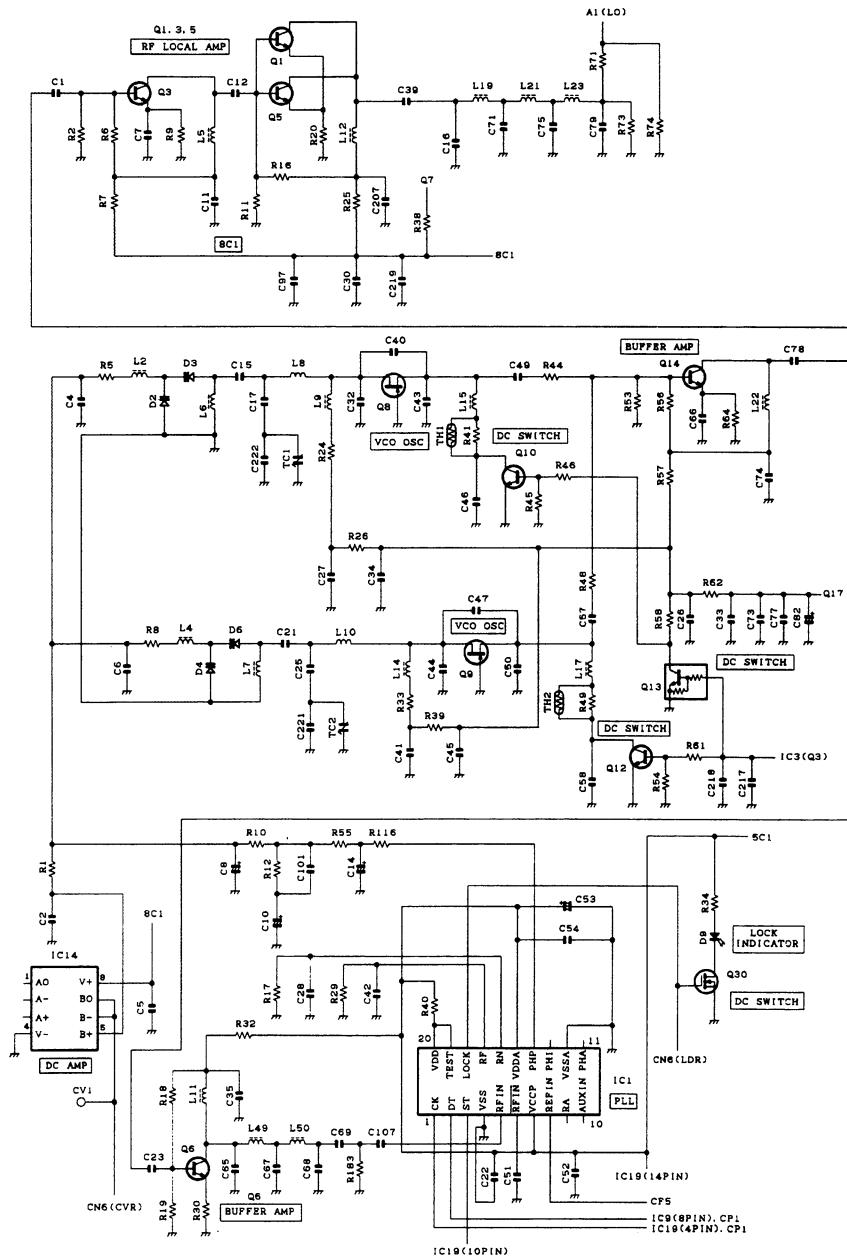


Fig.18 Receiver main PLL circuit

CIRCUIT DESCRIPTION

4.5 Receiver DDS circuit

The receiver DDS circuit varies the reference frequency of the receiver main PLL to implement fine frequency steps which cannot be achieved by a single-loop PLL. This circuit comprises IC20, Q33, Q39, and CF5. The output frequency is used as the reference frequency for the receiver main PLL.

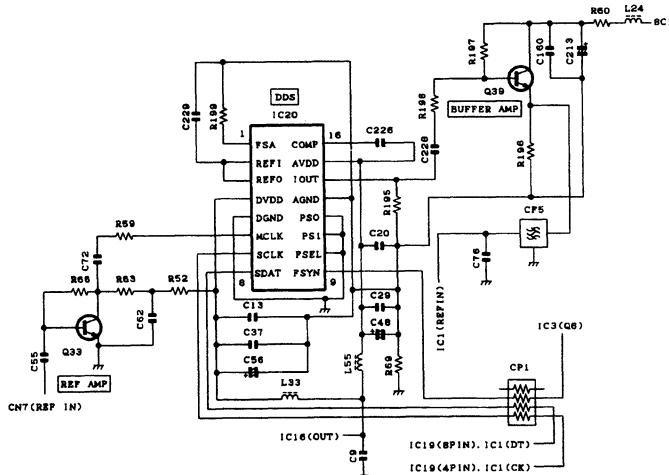


Fig.19 Receiver DDS circuit

4.6 Baseband circuit

The baseband signal circuit consists of HPF Q26, LPF Q28, D11, and Q29. The baseband signals detected by the narrow FM and wide FM detector circuits are de-emphasized by LPF Q28. The sub-audible components of the signal are removed by HPF Q26, and the resulting signal is switched with a squelch signal by D11 and Q29, and output as an RA signal from CN6.

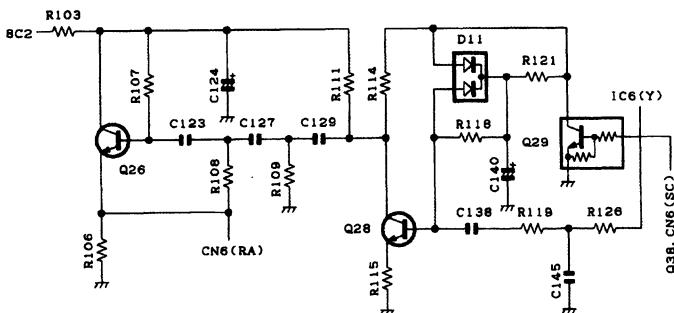


Fig.20 Baseband circuit

4.7 Other circuits

In addition, the receiver circuit contains an EEPROM (IC10) as in the transmitter circuit. Adjustment data for each unit and the last channel data are written into the EEPROM. IC2, IC4, IC13, and IC16 are three-pin AVR ICs. Q17 is a ripple filter for the power supplied to the first local oscillator VCO. IC3 is a shift register. Q16, Q18, Q19, Q20, and Q22 are switching transistors.

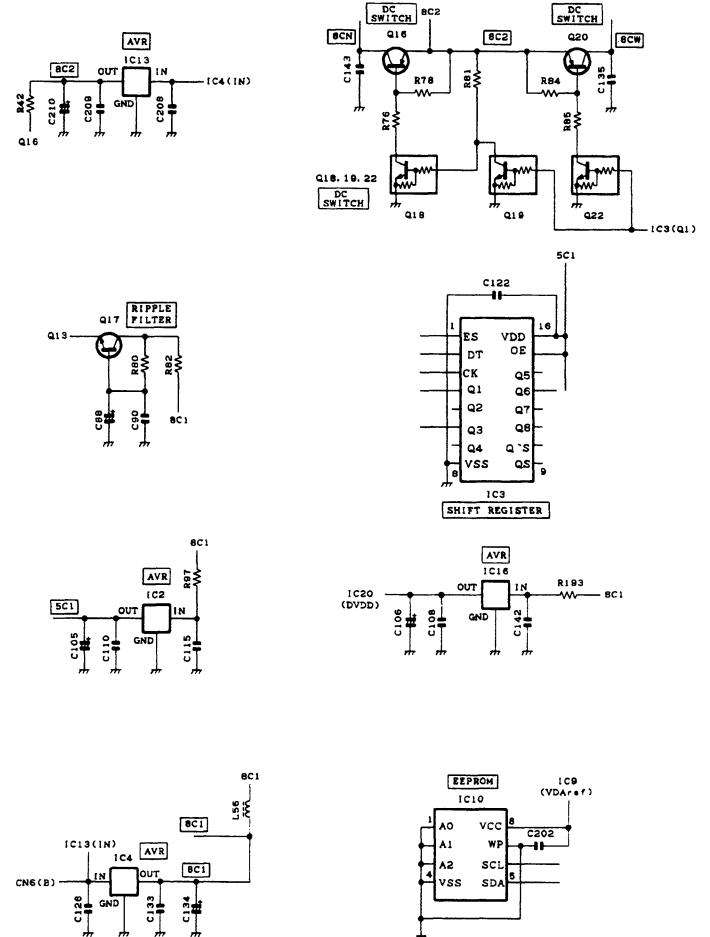


Fig.21 Other circuits

CIRCUIT DESCRIPTION

5. Control Circuit

The control unit (X53-388) consists of the following circuits:
(1) main CPU, (2) sub CPU, (3) DSP circuit, (4) AF PA circuit,
(5) display circuit, (6) baseband circuit, (7) Microphone AGC
circuit, (8) RS-232C circuit, and (9) power supply circuit.

5.1 Main CPU

The main CPU (IC17) is a 16-bit single-chip microcomputer containing a 128k ROM and a 5k RAM. This CPU controls the sub CPU, the flash ROM, and the DSP, encodes high-speed and low-speed data, controls the transmitter unit, the receiver unit, the control unit, and the display circuit and sends data to or from an external device.

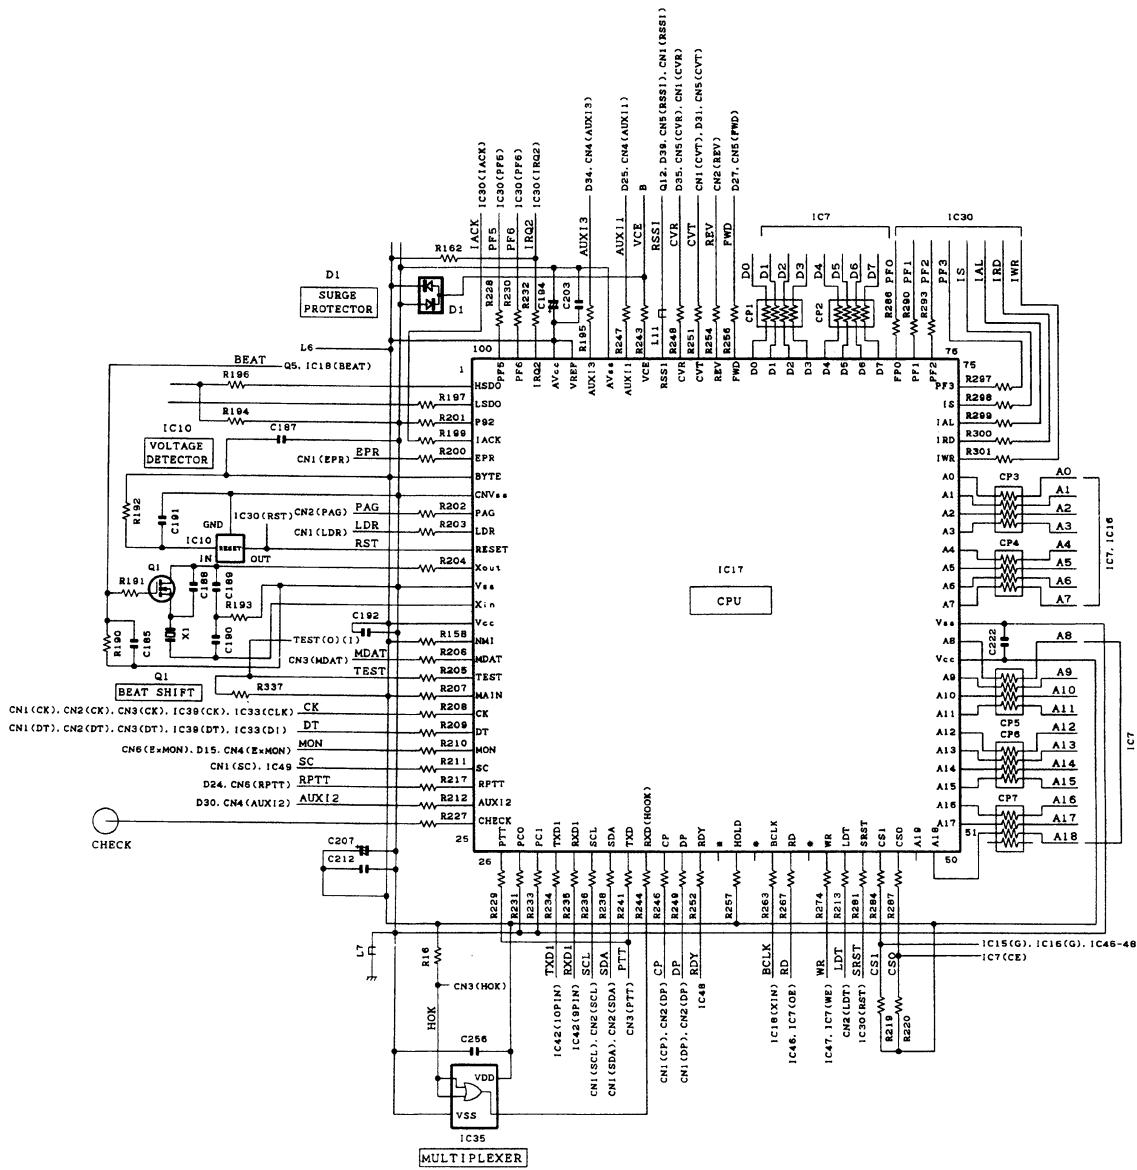


Fig.22 Main CPU

TKR-740

CIRCUIT DESCRIPTION

5.2 Sub CPU

The sub CPU (IC18) is of the same type as the main CPU, but is programmed so that it operates as the sub CPU by connecting its pin 18 to GND (pin 18 of the main CPU is connected to Vdd.). The sub CPU functions as an I/O expander, and controls the flash ROM, DSP, and extended I/O. IC15 and IC16 are data bus buffer ICs.

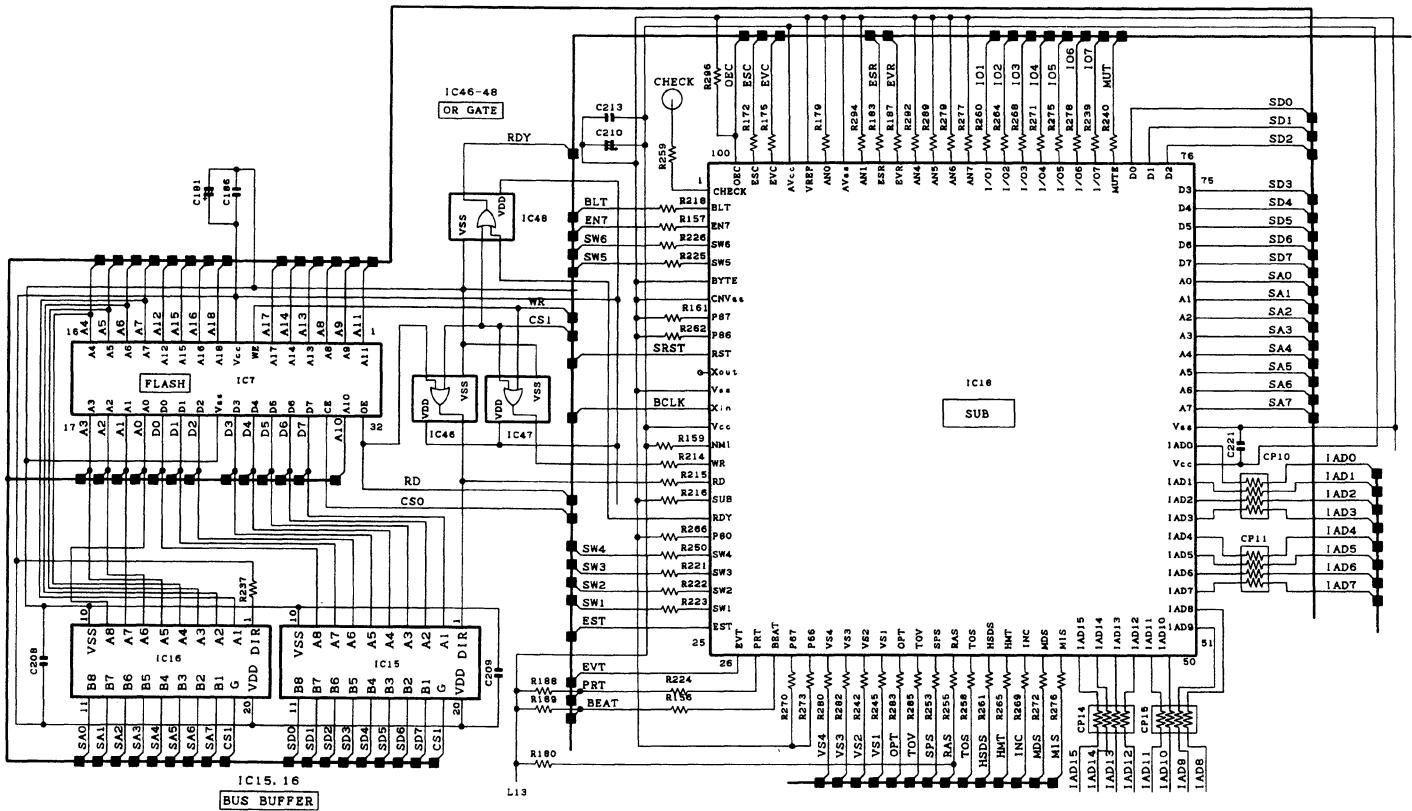


Fig.23 Sub CPU


CIRCUIT DESCRIPTION

5.3 DSP circuit

The DSP circuit filters transmitter/receiver audio signals and decodes signaling (QT, DQT). This circuit consists of IC30, IC24, IC27, IC22, IC31, IC34, and IC25. The receiver signal DET is converted from analog to digital by codec IC27 with a sampling frequency of 16.128 kHz. The digitized audio signal is sent to DSP IC30 to process the signaling signal and audio signal. The processed digital audio signal is fed to codec IC27, converted from digital to analog, and the analog signal is output from pin 12 (Vout R). Then, the audio signal is amplified by IC34 (B/2), passes through the IC34 (A/2) low-pass filter, and goes to multiplexer IC37.

The transmitter audio signal coming from pin 13 of IC29 is

amplified by IC22 (B/2), fed to pin 6 (Vin R) of codec IC27, and converted from analog to digital at a sampling frequency of 16.128 kHz. The digitized transmitter audio signal is AGC-processed, pre-emphasized and filtered at 300 Hz to 3 kHz by DSP IC30, and the resulting signal is fed back to codec IC27, converted from digital to analog, and the analog signal is output from pin 15 (Vout L). The transmit signal from Vout L is amplified by IC34 (B/2), passes through the IC34 (A/2) low-pass filter, and goes to the IC12 (A/2) summing amplifier. IC24 is a counter IC and the clock required for the codec and DSP is generated by dividing the 16.515MHz clock signal produced by DSP IC30.

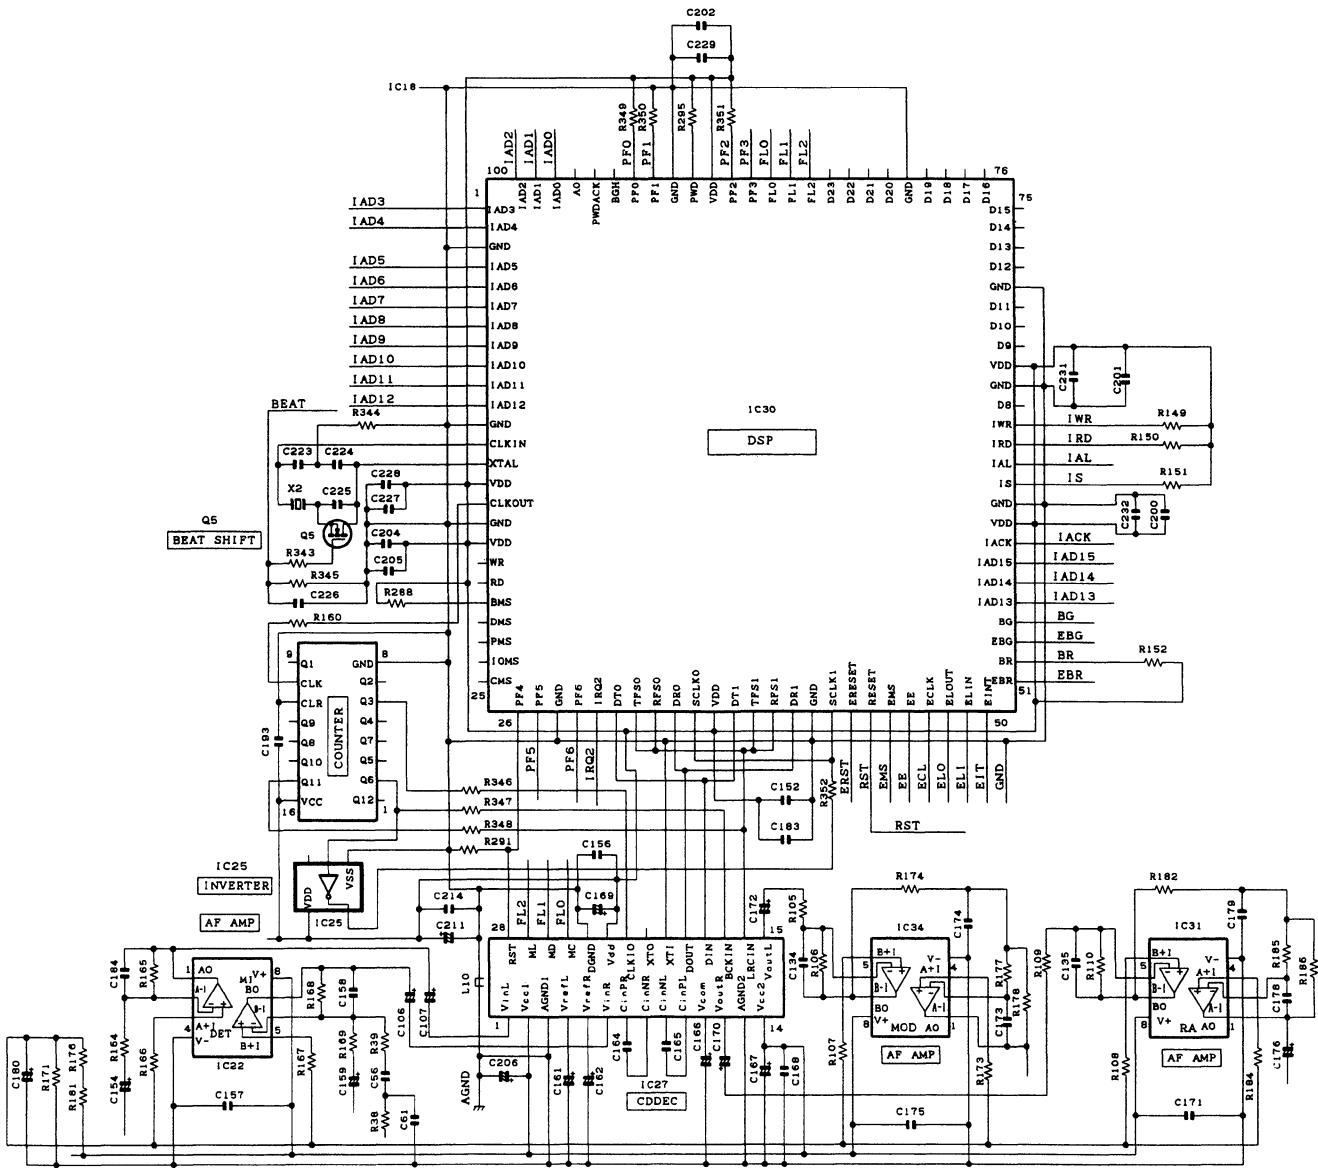

CIRCUIT DESCRIPTION

5.4 AF PA circuit

The AF PA circuit is an AF amplifier for driving speakers to monitor received audio signals. This circuit consists of IC45. The 4W audio output can be provided to an external 4 ohm speaker by supplying power supply voltage through the 15-pin

test connector "SPO, SPG" on the rear panel. The impedance of the internal speaker is adjusted to provide an audio output of about 0.2 W when the internal speaker installed on this model front panel is used.

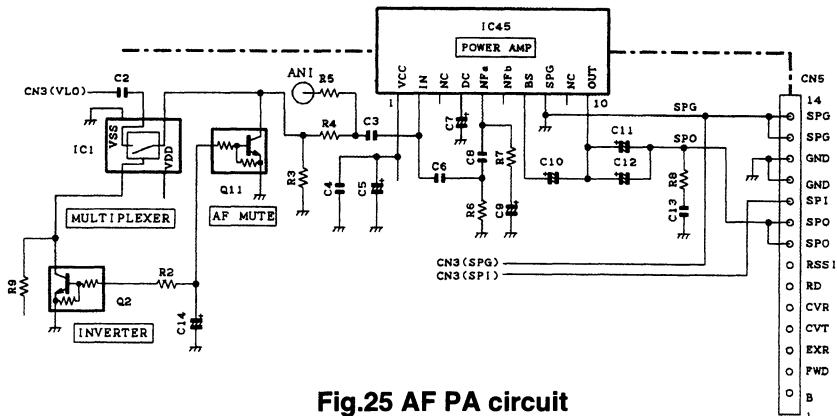


Fig.25 AF PA circuit

5.5 Display circuit

The display circuit contains 7-segment LED D700, D701 (orange: see the operation manual for details of display), D703 (green: circuit power supply), D704 (red: transmit), D705 (green: busy), two-color LED D702 (green: internal; red: external reference state), LEDs in switches S700 to S705, IC700, IC701, IC702 and IC703 to display this model channels

and states. IC700 to IC703 are shift registers which convert serial data from the CPU to parallel data and light LEDs. Q706, Q707, Q708, Q709, and Q710 are switching transistors which control two-color LED D702. IC704, IC705, and IC706 are three-pin AVR ICs which produce power used for the display circuit.

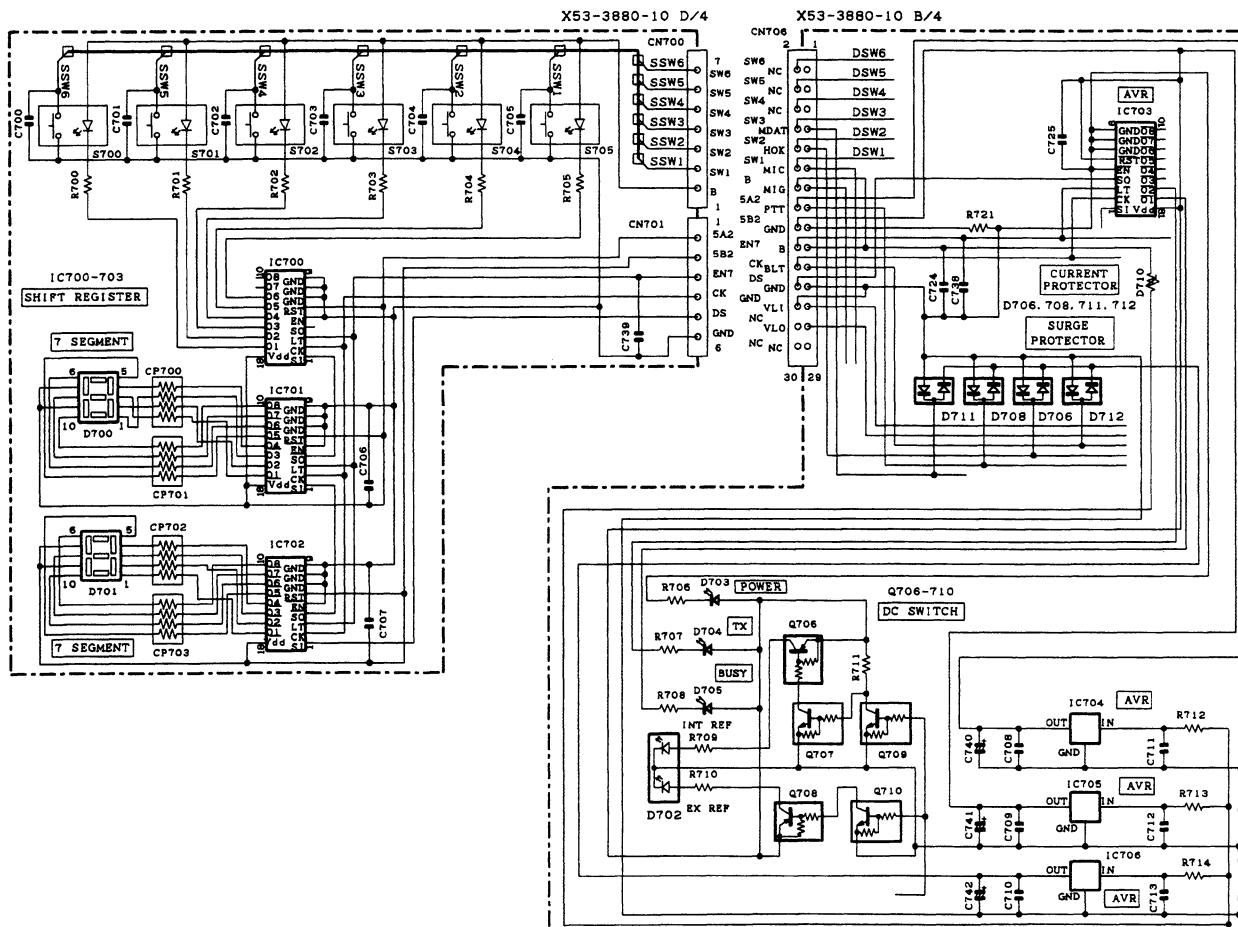


Fig.26 Display circuit

CIRCUIT DESCRIPTION

5.6 Baseband circuit

The baseband circuit switches between the modulation signal to the transmitter unit, demodulation signal from the receiver unit, and remote audio signal and adjusts their levels. This circuit consists of IC12, IC13, IC14, IC29, IC32, IC33, IC36, IC37 and IC40. Modulation inputs include local microphone input, low-speed data (LSD), high-speed data (HSD), external audio input (TA), external data input (TD), and

remote modulation input (RTA), and demodulation outputs include receive audio output (RA), receive data output (RD), and remote receive audio (RRA). The multiplexer (IC14, IC29, IC37) changes signals, the electronic volume control (IC33) adjusts the level, and the operational amplifier (IC12, IC13, IC32, IC36, IC42) amplifies and sums signals.

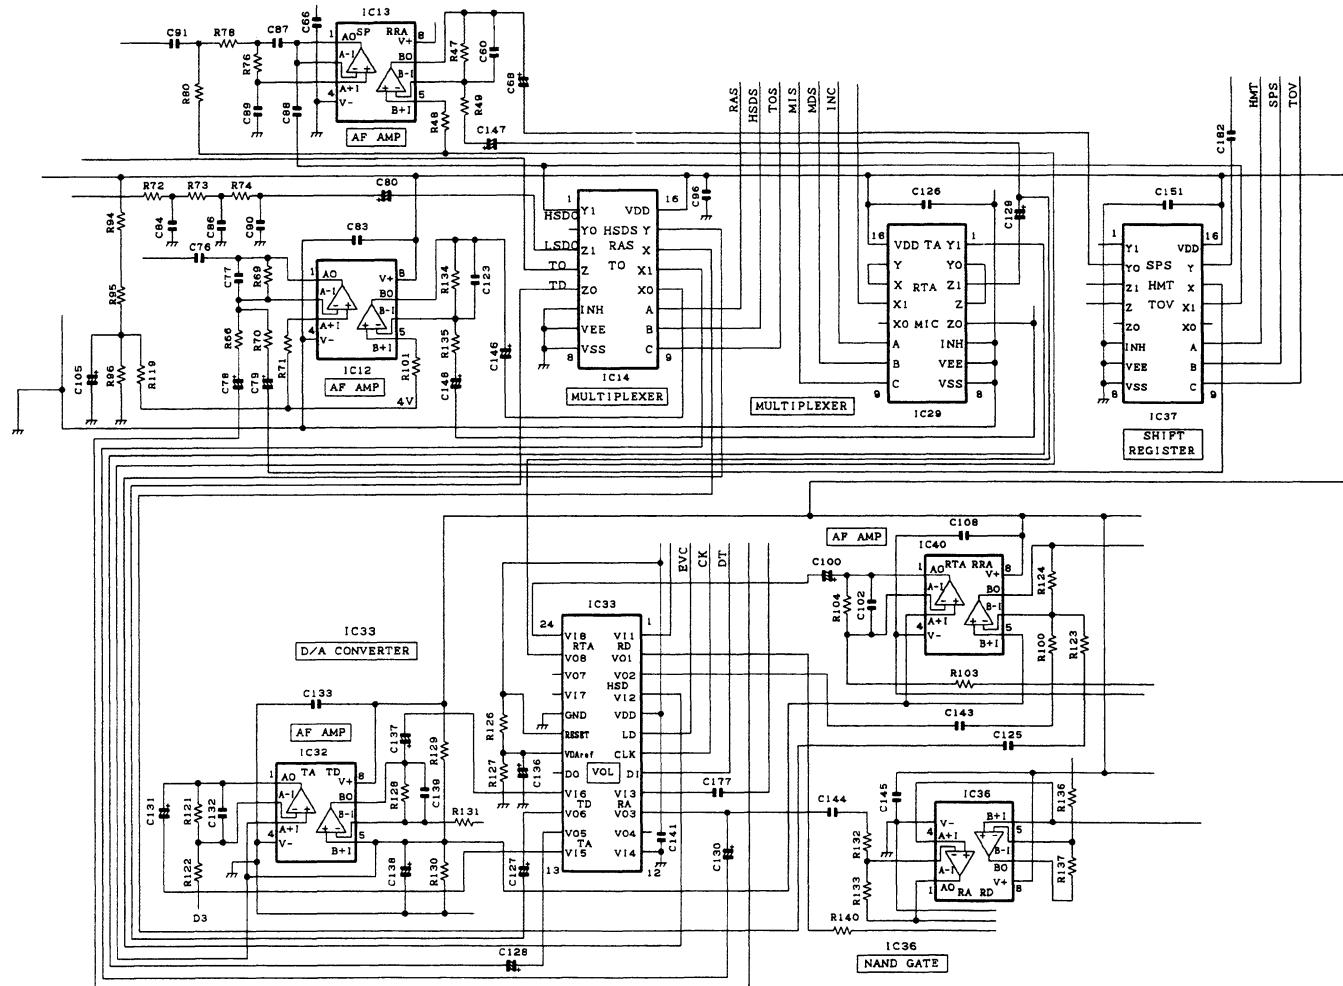
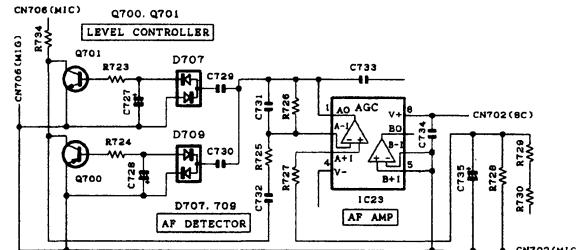


Fig.27 Baseband circuit


CIRCUIT DESCRIPTION

5.7 Microphone AGC circuit


The microphone AGC circuit AGC-amplifies an audio signal coming from a local microphone so that it does not overdrive the modulator. This circuit consists of IC23, D707, D709, Q700, and Q701. The AGC is operated by controlling the + and - levels of amplitude using the current obtained by positive and negative detection of the amplified audio signal.

**Fig.28 Microphone AGC circuit****5.8 RS-232C circuit**

The RS-232C circuit connects the RS-232C serial port of a personal computer directly to this model to perform FPU operation. The FPU operation can also be performed by connecting a programming cable (KPG-46) to the local microphone on the front panel. If the D-sub connector on the rear panel is used, the programming cable is not required. The 232C driver IC (IC42) changes the TTL-232C level. The FPU (KPG-47D) has a new transmitter/receiver circuit monitor function (transmitter: forward power, reflected power display, transmitter main PLL lock voltage; receiver: RSSI display, receive main PLL lock voltage). Data required for this function is also transferred through the RS-232C serial port. The firmware can only be rewritten using the local microphone connector on the front panel.

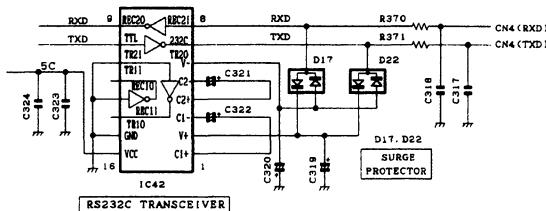**Fig.29 RS-232C circuit****5.9 Power supply circuit**

The power supply circuit generates power to operate the CPU, DSP, flash ROM, bi-directional buffer, and baseband circuit. This circuit consists of IC3, IC4, IC5 and IC6.

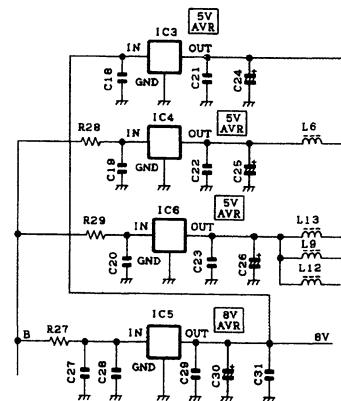**Fig.30 Power supply circuit**

SEMICONDUCTOR DATA

IC17 MAIN CPU (30622M4-103GP)

■ Pin function

Pin No.	Port name	I/O	Function
1	HSDO	O	High speed data output
2	LSDO	O	Low speed data output
3	P92	-	Not used
4	IACK	I	DSP IDMA Acknowledge input
5	EPR	O	RX PLL data strobe output
6	BYTE	I	+5V
7	CNVss	I	GND
8	PAG	O	Digital pager signal output
9	LDR	I	RX PLL lock detect input
10	RESET	I	Microcomputer reset input
11	Xout	-	14.745MHz (system clock)
12	Vss	-	GND
13	Xin	-	14.745MHz (system clock)
14	Vcc	-	+5V
15	NMI	-	Not used
16	MDAT	I	Not used
17	TEST	I	Test switch input
18	MAIN	I	Main/Sub CPU select input (H:Sub,L:Main)
19	CK	O	Common data output
20	DT	O	Common clock output
21	MON	I	Monitor switch input
22	SC	I	Squelch control input
23	RPTT	I	Remote PTT input
24	AUXI2	I	Auxiliary input 2
25	CHECK	-	Check port
26	PTT	I	PTT switch input
27,28	PC0,1	-	Not used
29	TXD1	O	Serial interface output 1 (ex. PC)
30	RXD1	I	Serial interface input 1 (ex. PC)
31	SCL	O	Serial EEPROM clock output
32	SDA	I/O	Serial EEPROM data input/output
33	TXD	O	Serial interface output 0 (ex. PC)
34	RXD	I	Serial interface input 0 (ex. PC)
35	CP	O	PLL clock output
36	DP	O	PLL data output
37	RDY	I	CPU ready input
38	ALE	-	Not used
39	HOLD	-	Not used
40	HLDA	-	Not used
41	BCLK	O	Sub CPU clock output
42	RD	O	Flash memory/Sub CPU RD bus
43	BHE	-	Not used
44	WR	O	Flash memory/Sub CPU WR bus
45	LDT	I	TX PLL lock detect input
46	SRST	O	Sub CPU reset output
47	CS1	O	Sub CPU chip select
48	CS0	O	Flash memory chip select
49	A19	O	Not used
50~59	A18~9	O	Flash memory address bus
60	Vcc	-	+5V
61	A8	O	Flash memory address bus
62	Vss	-	GND

Pin No.	Port name	I/O	Function
63~70	A7~0	O	Flash memory/Sub CPU address bus
71	IWR	O	DSP IDMA write output
72	IRD	O	DSP IDMA read output
73	IAL	O	DSP IDMA address latch output
74	IS	O	DSP IDMA select output
75	PF3	O	DSP RX mute control output
76	PF2	-	Not used
77	PF1	O	DSP modulation control output
78	PF0	-	Not used
79~86	D7~0	I/O	Flash memory/Sub CPU data bus
87	AN7	I	Forward power voltage input
88	AN6	I	Reverse power voltage input
89	AN5	I	TX VCO voltage input
90	AN4	I	RX VCO voltage input
91	AN3	I	RSSI level input
92	AN2	I	Power supply voltage input
93	AUXI1	I	Auxiliary input 1
94	Avss	GND	GND
95	AUXI3	I	Auxiliary input 3
96	Vref	I	+5V
97	Avcc	I	GND
98	IRQ2	O	DSP interrupt request output
99	PF6	O	DSP Mic mute control output
100	PF5	O	DSP TX/RX control output

IC18 SUB CPU (30622M4-103GP)

■ Pin function

Pin No.	Port name	I/O	Function
1	P94	-	Check port
2	BLT	-	Not used
3	EN7	O	LED data strobe output
4,5	SW6,5	I	PF6,5 key input
6	BYTE	I	GND
7	CNVss	I	GND
8,9	P87,86	-	Not used
10	RST	I	Microcomputer reset input
11	Xout	-	14.745MHz (system clock)
12	Vss	-	GND
13	Xin	-	14.745MHz (system clock)
14	Vcc	-	+5V
15	NMI	-	Not used
16	WR	I	Write enable input
17	RD	I	Read enable input
18	SUB	I	Main/Sub CPU select input (H:Sub,L:Main)
19	RDY	O	Main CPU ready control output
20	P80	-	Not used
21~24	SW4~1	I	PF4 ~1key input
25	EST	O	TX shift register data strobe output
26	EVT	O	TX D/A converter IC data strobe output
27	PRT	I	Exciter Temperature detect input
28	BEAT	O	Beat shift control (H:ON,L:OFF)
29,30	P67,P66	-	Not used
31~34	VS4~1	O	Voice scrambler data output 4~1
35	OPT	O	Option board control output (H:OFF,L:ON)

SEMICONDUCTOR DATA

Pin No.	Port name	I/O	Function
36	TOV	O	Take over control output
37	SPS	O	Local speaker output select
38	RAS	O	RA output select
39	TOS	O	TO output select
40	HSDS	O	High speed data output control
41	HMT	O	High speed data mute control
42	INC	-	Not used
43	MDS	O	Modulation select
44	MIS	O	Mic select
45~50	IAD15~10	I/O	DSP IDMA address/data bus
51~59	IAD9~1	I/O	DSP IDMA address/data bus
60	Vcc	-	+5V
61	IAD0	I/O	DSP IDMA address/data bus
62	Vss	-	GND
63~70	A7~0	I	Address bus
71	D7	I/O	Data bus
72~78	D6~0	I/O	Data bus
79	MUTE	O	Local speaker mute control output
80~86	I/O7~1	I/O	Auxiliary input/output 7~1
87~90	AN7~4	-	Not used
91	EVR	O	RX D/A converter IC data strobe output
92	ESR	O	RX shift register data strobe output
93	AN1	-	Not used
94	Avss	-	Not used
95	AN0	-	Not used
96	Vref	-	Not used
97	Avcc	-	Not used
98	EVC	O	Control D/A converter IC data strobe output
99	ESC	O	Control shift register data strobe output
100	OEC	O	Control shift register data output enable

IC30 DSP (ADSP2185BST133)

■ Pin function

Pin No.	Port name	I/O	Function
1,2	IAD3,4	I/O	Internal DMA port / Sub CPU
3	GND	-	GND
4~11	IAD5~12	I/O	Internal DMA port / Sub CPU
12	GND	-	GND
13	CLKIN	I	Clock input / 16.515072MHz
14	XTAL	I	Clock input / 16.515072MHz
15	Vdd	-	Vdd
16	CLKOUT	O	DSP clock output / 33.030144MHz
17	GND	-	GND
18	Vdd	-	Vdd
19	WR	O	Memory Write Enable / NC
20	RD	O	Memory Write Enable / NC
21	BMS	O	Byte memory select / pull up
22	DMS	O	Data memory select / NC
23	PMS	O	Program memory select/NC
24	IOMS	O	Memory select/NC
25	CMS	O	Combined memory select / NC
26	PF4	O	Prog. I/O / CODEC reset
27	PF5	I	Prog. I/O / Main CPU / Mic mute,0:OFF / 1:ON
28	GND	-	GND

Pin No.	Port name	I/O	Function
29	PF6	I	Prog. I/O / Main CPU / TX / Rxcontrol,0:TX / 1:RX
30	IRQ2	I	Interrupt Req./pull up
31	DTO	I/O	SPORT0 / CODEC / CODEC Data
32	TFS0	I/O	SPORT0 / CODEC,Devider / CODEC Data
33	RFS0	I/O	SPORT0 / CODEC,Devider / CODEC Data
34	DRO	I/O	SPORT0 / CODEC / CODEC Data
35	SCLKO	I/O	SPORT0 / CODEC,Devider / CODEC Data
36	Vdd	-	Vdd
37	DT1	I/O	SPORT1 / CODEC
38	TFS1	I/O	SPORT1 / CODEC,Devider
39	RSF1	I/O	SPORT1 / CODEC,Devider
40	DR1	I/O	SPORT1 / CODEC
41	GND	-	GND
42	SCLK1	I/O	SPORT1 / CODEC,Devider
43	ERESET	-	Emulation / ICE conector
44	RESET	I	Reset IN/Reset IC,ICE conector/DSP reset
45	EMS	-	Emulation / ICE conector
46	EE	-	Emulation / ICE conector
47	ECLK	-	Emulation / ICE conector
48	ELOUT	-	Emulation / ICE conector
49	ELIN	-	Emulation / ICE conector
50	EINT	-	Emulation / ICE conector
51	EBR		Emulation / ICE conector
52	BR	I	Bus request / pull up,ICE conector
53	EBG		Emulation / ICE conector
54	BG	O	Bus request / ICE conector
55~57	IAD13~15	I/O	Internal DMA port / Sub CPU
58	IACK	O	IDMA Acknowlege / Main CPU
59	Vdd	-	Vdd
60	GND	-	GND
61	IS	I	IDMA Select / pull up, Main CPU
62	IAL	I	IDMA Address Latch / pull up, Main CPU
63	IRD	I	IDMA Read Enable / pull up, Main CPU
64	IWR	I	IDMA Write Enable / pull up, Main CPU
65	D8	I/O	Data I/O / NC
66	GND	-	GND
67	Vdd	-	Vdd
68~70	D9~11	I/O	Data I/O / NC
71	GND		GND
72~79	D12~19	I/O	Data I/O / NC
80	GND	-	GND
81~84	D20~23	I/O	Data I/O / NC
85	FL2	O	Output Frag / CODEC MC terminal
86	FL1	O	Output Frag / CODEC MD terminal
87	FL0	O	Output Frag / CODEC ML terminal
88	PF3	I	Prog. I/O / Main CPU / RX mute 0:OFF / 1:ON
89	PF2	I	Mode Select / pull up / HOST mode select
90	Vdd	-	Vdd
91	PWD	I	Power Control/VDD
92	GND	-	GND
93	PF1	I	Mode Select / pull down / HOST mode select
94	PF0	I	Mode Select / pull up / HOST mode select
95	BGH	O	Bus Grant Hung / NC
96	PWDACK	O	Power Control / NC
97	A0	O	Address / NC
98~100	IAD0~2	I/O	Internal DMA port / Sub CPU

DESCRIPTION OF COMPONENTS

CONTROL UNIT (X53-3880-10)

REF.No	Parts name	DESCRIPTION
IC1	IC	MULTIPLEXER
IC3~6	IC	AVR
IC7	IC	FLASH ROM
IC10	IC	VOLTAGE DETECTOR
IC12,13	IC	AF AMP
IC14	IC	MULTIPLEXER
IC15,16	IC	BUS BUFFER
IC17,18	IC	CPU
IC22,23	IC	AF AMP
IC24	IC	COUNTER
IC25	IC	INVERTER
IC27	IC	CODEC
IC29	IC	MULTIPLEXER
IC30	IC	DSP
IC31,32	IC	AF AMP
IC33	IC	D/A CONVERTER
IC34	IC	AF AMP
IC35	IC	MULTIPLEXER
IC36	IC	NAND GATE
IC37	IC	SHIFT REGISTER
IC38	IC	NAND GATE
IC39	IC	SHIFT REGISTER
IC40	IC	AF AMP
IC42	IC	RS232C TRANSCEIVER
IC46~49	IC	OR GATE
IC700~703	IC	SHIFT REGISTER
IC704~706	IC	AVR
Q1,5	FET	BEAT SHIFT
Q2,8~10	TRANSISTOR	INVERTER
Q11	TRANSISTOR	AF MUTE
Q700,701	TRANSISTOR	LEVEL CONTROLLER
Q706~710	TRANSISTOR	DC SWITCH
D1,3~22	DIODE	SURGE PROTECTOR
D24~28		
D30~32		
D34~39		
D700,701	LED ASS'Y	7 SEGMENT
D702	LED	REFERENCE
D703	LED	POWER
D704	LED	TX
D705	LED	BUSY
D706	DIODE	SURGE PROTECTOR
D707	DIODE	AF DETECT
D708	VARISTOR	SURGE PROTECTOR
D709	DIODE	AF DETECTOR
D710	VARISTOR	CURRENT PROTECTOR
D711, 712	DIODE	SURGE PROTECTOR

RX UNIT (X55-3050-XX)

PIN. No	Parts name	DESCRIPTION
A1	DBM	DOUBLE BALANCED MIXER
IC1	IC	PLL
IC2	IC	AVR
IC3	IC	SHIFT REGISTER
IC4	IC	AVR
IC5	IC	DC AMP
IC6	IC	MULTIPLEXER
IC7,8	IC	FM IF IC
IC9	IC	D/A CONVERTER
IC10	IC	EEPROM
IC11,12	IC	AF AMP
IC13	IC	AVR
IC14	IC	DC AMP
IC15	IC	PLL
IC16	IC	AVR
IC17	IC	RF AMP
IC18	IC	ANALOG SWITCH
IC19	IC	INVERTER
IC20	MOS IC	DDS
IC21	IC	ANALOG SWITCH
Q1,3,5	TRANSISTOR	RF LOCAL AMP
Q6	TRANSISTOR	BUFFER AMP
Q7	TRANSISTOR	AVR
Q8,9	FET	VCO OSC
Q10,12,13	TRANSISTOR	DC SWITCH
Q14	TRANSISTOR	BUFFER AMP
Q16	TRANSISTOR	DC SWITCH
Q17	TRANSISTOR	RIPPLE FILTER
Q18~20	TRANSISTOR	DC SWITCH
Q22	TRANSISTOR	DC SWITCH
Q24,25	TRANSISTOR	IF AMP
Q26	TRANSISTOR	ACTIVE FILTER
Q28	TRANSISTOR	SQ AMP
Q29	TRANSISTOR	SQ SWITCH
Q30	FET	DC SWITCH
Q31,32	TRANSISTOR	IF AMP
Q33	TRANSISTOR	REF AMP
Q34,35	FET	SQ SWITCH
Q36~38	TRANSISTOR	SQ SWITCH
Q39	TRANSISTOR	BUFFER AMP
D2~4,6	VARICAP	FREQ. CONTROL
D9	LED	INDICATOR
D10	DIODE	RF SW
D11	DIODE	SQ SW

DESCRIPTION OF COMPONENTS

TX UNIT (X56-3040-10)

PIN. No	Parts name	DESCRIPTION
IC1,2	IC	AVR
IC3	IC	D/A CONVERTER
IC4	IC	SHIFT REGISTER
IC100	IC	AVR
IC101	IC	PLL
IC102,103	IC	AVR
IC105	IC	AF AMP
IC106	IC	EEPROM
IC107	IC	AF AMP
IC108	IC	AVR
IC109	IC	BUFFER AMP
IC110	IC	AVR
IC200	IC	AND GATE
IC201	IC	PLL
IC202	MOS IC	DDS
IC203	IC	DC AMP
IC204	IC	COMPARATOR
IC205	IC	AVR
IC206	IC	INVERTER
IC301	IC	POWER MODULE
IC302	IC	DC AMP
IC303	IC	DC AMP/COMPARATOR
IC304	IC	ANALOG SWITCH
Q1,2	FET	VCO OSC
Q3,4	TRANSISTOR	DC SWITCH
Q5	FET	DC SWITCH
Q6	TRANSISTOR	BUFFER AMP
Q7	TRANSISTOR	RIPPLE FILTER
Q8	TRANSISTOR	DC SWITCH
Q9	TRANSISTOR	RF AMP
Q11,12	TRANSISTOR	DC SWITCH
Q13	TRANSISTOR	RF AMP
Q14	FET	RF AMP
Q15	FET	BUFFER AMP
Q17,18	FET	DC SWITCH
Q21	TRANSISTOR	DC SWITCH
Q102	TRANSISTOR	BUFFER AMP
Q106	TRANSISTOR	DOUBLER
Q107-109	TRANSISTOR	RF AMP
Q110	TRANSISTOR	DC SWITCH
Q112	FET	SQ SWITCH
Q113	FET	DC SWITCH
Q114	TRANSISTOR	DC SWITCH
Q115	TRANSISTOR	RF AMP
Q201	TRANSISTOR	VCO OSC
Q202	TRANSISTOR	BUFFER AMP
Q203	FET	DC SWITCH
Q205	TRANSISTOR	RF AMP
Q206	FET	DC SWITCH
Q207	TRANSISTOR	INVERTER
Q208	FET	DC SWITCH
Q240	TRANSISTOR	BUFFER AMP
Q241	TRANSISTOR	RF AMP

PIN. No	Parts name	DESCRIPTION
Q242	TRANSISTOR	BUFFER AMP
Q301	TRANSISTOR	DC AMP
Q302,304	TRANSISTOR	DC SWITCH
Q305	TRANSISTOR	DC SWITCH
Q306	TRANSISTOR	DC AMP
Q307	TRANSISTOR	DIFFERENTIAL AMP
Q308	TRANSISTOR	DC SWITCH
Q309	TRANSISTOR	DC AMP
Q310	TRANSISTOR	DIFFERENTIAL AMP
Q312,313	TRANSISTOR	DC SWITCH
D1-4	VARICAP	FREQ. CONTROL
D5,6	VARICAP	MODULATION
D7	DIODE	RF SWITCH
D11,12	DIODE	CURRENT STEERING
D50,51	LED	LOCK INDICATOR
D52	LED	TX INDICATOR
D101,103	DIODE	RF SWITCH
D201	VARICAP	FREQ. CONTROL
D202	VARICAP	FREQ. CONTROL
D203	VARICAP	MODULATION
D204	DIODE	CURRENT STEERING
D205	DIODE	RF DETECTOR
D206	VARISTOR	CURRENT PROTECTOR
D303	SURGE ABSORBER	SURGE PROTECTOR
D304	DIODE	CURRENT STEERING
D305	DIODE	REVERSE VOLTAGE PROTECTOR
D306~308	DIODE	RF DETECTOR
D310	VARISTOR	CURRENT PROTECTOR
D312	ZENER DIODE	VOLTAGE REFERENCE
D317,318	DIODE	CURRENT STEERING
D500	VARISTOR	CURRENT PROTECTOR

PARTS LIST

* New Parts. Δ indicates safety critical components.Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

L: Scandinavia

Y: PX (Far East, Hawaii)

Y: AAFES (Europe)

K: USA

T: England

X: Australia

P: Canada

E: Europe

M: Other Areas

TKR-740

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination						
TKR-740																	
1	3A	*	A62-0726-03	PANEL FRONT		D	1A,1B		N87-2606-46	BRAZIER HEAD TAPITTE SCREW							
2	3A	*	B10-2590-04	FRONT GLASS		E	1B,2C		N87-2616-46	BRAZIER HEAD TAPITTE SCREW							
3	3B	*	B11-1223-04	FILTER PF		H	1A,2B		N67-3008-45	PAN HEAD SEMS SCREW W							
4	3A	*	B11-1225-04	FILTER LED		45	3B		T07-0347-05	SPEAKER							
5	3B	*	B11-1231-04	FILTER 7 SEG		CONTROL UNIT (X53-3880-10)											
6		*	B62-1136-00	INSTRUCTION MANUAL		D700,701			LA301DB	LED ASSY							
7	2C		E30-3343-15	DC CORD		D702			B30-0864-05	LED(RE/GR)							
8			E30-3344-05	DC CORD ACC		D703			B30-2198-05	LED(GR)							
9			E31-3228-05	LEAD WIRE WITH CONNECTOR 15P		D704			B30-2197-05	LED(RE)							
10	2B		E37-0712-05	FLAT CABLE CONT-TX.RX		D705			B30-2198-05	LED(GR)							
11	1B		E37-0713-05	FLAT CABLE TX-FINAL		C1			CK73GB1E103K	CHIP C 0.010UF K							
12	2D		E37-0715-05	LEAD WIRE WITH CONNECTOR DSUB-25P		C2,3			CK73EB1C105K	CHIP C 1.0UF K							
13	3B		E37-0717-05	LEAD WIRE WITH CONNECTOR SP		C4			CK73GB1H102K	CHIP C 1000PF K							
14	2C,2D		E37-0718-05	LEAD WIRE WITH CONNECTOR BNC		C5			C92-0729-05	ELECTR C 330UF 25WV							
15	1B		E37-0719-05	LEAD WIRE WITH CONNECTOR TX-RX		C6			CK73GB1H102K	CHIP C 1000PF K							
16	1B		E37-0720-05	LEAD WIRE WITH CONNECTOR TX-FINAL		C7			C92-0726-05	ELECTR C 47UF 25WV							
17	2D	*	E37-0721-15	LEAD WIRE WITH CONNECTOR 15P ACC		C8			CK73GB1H102K	CHIP C 1000PF K							
18	1B		E37-0791-15	LEAD WIRE WITH TERMINAL DC(+)		C9,10			C92-0726-05	ELECTR C 47UF 25WV							
19	3B	*	E37-0813-05	LEAD WIRE WITH CONNECTOR 7SEG-DISP		C11,12			C92-0728-05	ELECTR C 470UF 16WV							
20	2D	*	E37-0814-05	LEAD WIRE WITH CONNECTOR 12P ACC		C13			CK73FB1E104K	CHIP C 0.10UF K							
21		*	E59-0410-05	SQUARE PLUG		C14			C92-0519-05	CHIP-TAN 1.0UF 25WV							
22	1D		F06-4027-05	FUSE(BLADE) (4A/32V)		C18			CK73FB1E104K	CHIP C 0.10UF K							
23	2D		F10-2297-04	SHIELDING PLATE RX		C19,20			CK73EB1C105K	CHIP C 1.0UF K							
24	2C	*	F10-2312-04	SHIELDING PLATE RX LOWER		C21-23			CK73GB1E103K	CHIP C 0.010UF K							
25	2B,2C		G02-0576-14	FLAT CLIP SPRING		C24-26			C92-0628-05	CHIP-TAN 10UF 10WV							
26	2C		G02-0839-04	FLAT CLIP SPRING		C27			CK73GB1H102K	CHIP C 1000PF K							
27	3B		G13-1653-04	CUSHION		C28			CK73FB1E104K	CHIP C 0.10UF K							
28	3B		G13-1669-04	CUSHION		C29			CK73GB1E103K	CHIP C 0.010UF K							
29	3B	*	G13-1703-14	CUSHION		C30			C92-0628-05	CHIP-TAN 10UF 10WV							
30	3B	*	G13-1728-04	CUSHION		C31			CK73GB1H102K	CHIP C 1000PF K							
31	3B	*	G13-1729-04	CUSHION		C32-46			CC73GCH1H101J	CHIP C 100PF J							
32	3B	*	G13-1730-04	CUSHION		C49-53			CC73GCH1H101J	CHIP C 100PF J							
33	3B	*	G13-1754-04	CUSHION		C54			CK73GB1E103K	CHIP C 0.010UF K							
34			H10-6612-02	POLYSTYRENE FOAMED FIXTURE		C55			CC73GCH1H101J	CHIP C 100PF J							
35			H20-1437-03	PROTECTION COVER		C56			CK73EB1C105K	CHIP C 1.0UF K							
36			H25-0029-04	PROTECTION BAG (60/110/0.07)		C57,58			CC73GCH1H101J	CHIP C 100PF J							
37			H25-0720-04	PROTECTION BAG (200X350)		C59			CK73GB1H562J	CHIP C 5600PF J							
38		*	H52-1429-02	ITEM CARTON CASE		C60			CC73GCH1H101J	CHIP C 100PF J							
39	1A		J21-8375-04	HARDWARE FIXTURE		C61			CK73FB1E223K	CHIP C 0.022UF K							
40			K01-0421-05	HANDLE		C66			CK73GB1E103K	CHIP C 0.010UF K							
41	3A		K29-3002-14	PUSHKNOB (TEST)		C68			CC73GCH1H101J	CHIP C 1.0UF K							
42	3A		K29-4539-04	KNOB (VOL)		C76			CK73EB1C105K	CHIP C 1.0UF K							
43	3A	*	N08-0543-04	DRESSED SCREW		C77			CC73GCH1H101J	CHIP C 100PF J							
44	1D		N09-2292-05	HEXAGON HEAD SCREW		C78-80			C92-0628-05	CHIP-TAN 10UF 10WV							
A	1C		N32-3006-45	FLAT HEAD MACHINE SCREW		C83			CK73GB1E103K	CHIP C 0.010UF K							
B	3A		N32-4008-45	FLAT HEAD MACHINE SCREW		C84			CK73GB1H472K	CHIP C 4700PF K							
C	1B	*	N35-3006-46	BINDING HEAD MACHINE SCREW		C86			CK73GB1H472K	CHIP C 4700PF K							
F	1A		N67-2606-46	PAN HEAD SEMS SCREW W		C87			CK73GB1H152K	CHIP C 1500PF K							
G	2B		N67-3006-46	PAN HEAD SEMS SCREW W		C88			CK73EB1C105K	CHIP C 1.0UF K							
						C89			CC73FC1H751J	CHIP C 750PF J							
						C90			CK73GB1E103K	CHIP C 0.010UF K							
						C91			CK73EB1C105K	CHIP C 1.0UF K							

TKR-740

PARTS LIST

CONTROL UNIT (X53-3880-10)

Ref. No.	Address	New parts	Parts No.	Description			Destination	Ref. No.	Address	New parts	Parts No.	Description			Destination
C96			CK73GB1E103K	CHIP C	0.010UF	K		C194			C92-0628-05	CHIP-TAN	10UF	10WV	
C100,101			C92-0628-05	CHIP-TAN	10UF	10WV		C200-202			CK73GB1H471K	CHIP C	470PF	K	
C102			CC73GCH1H101J	CHIP C	100PF	J		C203			CK73GB1E103K	CHIP C	0.010UF	K	
C105-107			C92-0628-05	CHIP-TAN	10UF	10WV		C204			CK73GB1H471K	CHIP C	470PF	K	
C108			CK73GB1E103K	CHIP C	0.010UF	K		C205			CK73GB1E103K	CHIP C	0.010UF	K	
C123			CC73GCH1H101J	CHIP C	100PF	J		C206		*	C92-0628-05	CHIP-TAN	10UF	10WV	
C125			CK73EB1C105K	CHIP C	1.0UF	K		C207		*	C92-0771-05	ELECTRO C	220UF	6.3WV	
C126			CK73FB1E103K	CHIP C	0.010UF	K		C208,209			CK73GB1E103K	CHIP C	0.010UF	K	
C127			C92-0628-05	CHIP-TAN	10UF	10WV		C210,211		*	C92-0771-05	ELECTRO C	220UF	6.3WV	
C128-131			C92-0519-05	CHIP-TAN	1.0UF	25WV		C212-214			CK73EB1C105K	CHIP C	1.0UF	K	
C132			CC73GCH1H101J	CHIP C	100PF	J		C221,222			CK73GB1E103K	CHIP C	0.010UF	K	
C133			CK73GB1E103K	CHIP C	0.010UF	K		C223,224			CC73GCH1H270J	CHIP C	27PF	J	
C134,135			CC73GCH1H101J	CHIP C	100PF	J		C225			CC73GCH1H150J	CHIP C	15PF	J	
C136			C92-0546-05	CHIP-TAN	68UF	6.3WV		C226,227			CK73GB1E103K	CHIP C	0.010UF	K	
C137,138			C92-0628-05	CHIP-TAN	10UF	10WV		C228			CK73GB1H471K	CHIP C	470PF	K	
C139			CC73GCH1H330J	CHIP C	33PF	J		C229			CK73GB1E103K	CHIP C	0.010UF	K	
C140-142			CK73GB1H102K	CHIP C	1000PF	K		C231,232			CK73GB1E103K	CHIP C	0.010UF	K	
C143,144			CK73EB1C105K	CHIP C	1.0UF	K		C256			CK73FB1E103K	CHIP C	0.010UF	K	
C145			CK73GB1E103K	CHIP C	0.010UF	K		C300-303			CC73GCH1H101J	CHIP C	100PF	J	
C146-148			C92-0519-05	CHIP-TAN	1.0UF	25WV		C304-312			CK73GB1H102K	CHIP C	1000PF	K	
C149			C92-0628-05	CHIP-TAN	10UF	10WV		C313			CC73GCH1H101J	CHIP C	100PF	J	
C150			C92-0519-05	CHIP-TAN	1.0UF	25WV		C315,316			CK73FB1E103K	CHIP C	0.010UF	K	
C151			CK73GB1E103K	CHIP C	0.010UF	K		C317,318			CC73GCH1H101J	CHIP C	100PF	J	
C152			CK73GB1H471K	CHIP C	470PF	K		C319-322			C92-0519-05	CHIP-TAN	1.0UF	25WV	
C153			CK73EB1C105K	CHIP C	1.0UF	K		C323			CK73GB1H102K	CHIP C	1000PF	K	
C154			C92-0628-05	CHIP-TAN	10UF	10WV		C324			CK73FB1E104K	CHIP C	0.10UF	K	
C155			CK73EB1C105K	CHIP C	1.0UF	K		C325-327			CK73GB1H102K	CHIP C	1000PF	K	
C156,157			CK73GB1E103K	CHIP C	0.010UF	K		C328-330			CC73GCH1H101J	CHIP C	100PF	J	
C158			CK73GB1H102K	CHIP C	1000PF	K		C331-337			CK73GB1H102K	CHIP C	1000PF	K	
C159			C92-0628-05	CHIP-TAN	10UF	10WV		C700-705			CC73GCH1H101J	CHIP C	100PF	J	
C160			CK73EB1C105K	CHIP C	1.0UF	K		C706,707			CK73GB1E103K	CHIP C	0.010UF	K	
C161,162			C92-0606-05	CHIP-TAN	4.7UF	10WV		C708-710			CK73FB1E104K	CHIP C	0.10UF	K	
C164,165			CK73GB1H102K	CHIP C	1000PF	K		C711-713			CK73FF1E334Z	CHIP C	0.33UF	Z	
C166			C92-0606-05	CHIP-TAN	4.7UF	10WV		C714,715			CK73GB1H102K	CHIP C	1000PF	K	
C167			C92-0628-05	CHIP-TAN	10UF	10WV		C716			C92-0628-05	CHIP-TAN	10UF	10WV	
C168			CK73FB1E104K	CHIP C	0.10UF	K		C717,718			CC73GCH1H101J	CHIP C	100PF	J	
C169,170			C92-0628-05	CHIP-TAN	10UF	10WV		C719			CK73GB1H471K	CHIP C	470PF	K	
C171			CK73GB1E103K	CHIP C	0.010UF	K		C720-722			CC73GCH1H101J	CHIP C	100PF	J	
C172			C92-0628-05	CHIP-TAN	10UF	10WV		C723			CK73GB1H471K	CHIP C	470PF	K	
C173			CC73GCH1H181J	CHIP C	180PF	J		C724			CC73GCH1H101J	CHIP C	100PF	J	
C174			CK73GB1H182K	CHIP C	1800PF	K		C725			CK73FB1E104K	CHIP C	0.10UF	K	
C175			CK73GB1E103K	CHIP C	0.010UF	K		C727,728			C92-0501-05	CHIP-TAN	1.5UF	10WV	
C176			C92-0628-05	CHIP-TAN	10UF	10WV		C729,730			CK73FB1E104K	CHIP C	0.10UF	K	
C177			CK73EB1C105K	CHIP C	1.0UF	K		C731			CC73GCH1H470J	CHIP C	47PF	J	
C178			CC73GCH1H271J	CHIP C	270PF	J		C732,733			CK73FB1E104K	CHIP C	0.10UF	K	
C179			CK73GB1H272K	CHIP C	2700PF	K		C734			CK73FB1E103K	CHIP C	0.010UF	K	
C180,181			C92-0628-05	CHIP-TAN	10UF	10WV		C735			C92-0628-05	CHIP-TAN	10UF	10WV	
C182			CK73EB1C105K	CHIP C	1.0UF	K		C736,737			CC73GCH1H101J	CHIP C	100PF	J	
C183			CK73GB1E103K	CHIP C	0.010UF	K		C738,739			CK73GB1H102K	CHIP C	1000PF	K	
C184			CC73GCH1H101J	CHIP C	100PF	J		C740-742			C92-0628-05	CHIP-TAN	10UF	10WV	
C185-187			CK73GB1E103K	CHIP C	0.010UF	K		CN1-3			E40-5736-05	FLAT CABLE CONNECTOR			
C188			CC73GCH1H101J	CHIP C	100PF	J		CN4			E40-5360-05	PIN ASSY			
C189,190			CC73GCH1H220J	CHIP C	22PF	J		CN5			E40-5701-05	PIN ASSY			
C191			CK73FB1C105K	CHIP C	1.0UF	K		CN6			E40-5702-05	PIN ASSY			
C192			CK73GB1E103K	CHIP C	0.010UF	K		CN700		*	E40-4676-05	PIN ASSY			
C193			CK73FB1E104K	CHIP C	0.10UF	K		CN701			E40-5986-05	PIN ASSY			

PARTS LIST

CONTROL UNIT (X53-3880-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
CN702			E40-5761-05	FLAT CABLE CONNECTOR		R96			RK73GB1J124J	CHIP R 120K J 1/16W	
CN703			E40-5538-05	PIN ASSY		R100			RK73GB1J273J	CHIP R 27K J 1/16W	
CN705			E40-5701-05	PIN ASSY		R101			RK73GB1J473J	CHIP R 47K J 1/16W	
CN706			E40-5960-05	PIN ASSY		R103			RK73GB1J104J	CHIP R 100K J 1/16W	
J700			E08-0876-05	MODULAR JACK		R104			RK73GB1J333J	CHIP R 33K J 1/16W	
L1-5			L92-0140-05	FERRITE CHIP		R105			RK73GB1J223J	CHIP R 22K J 1/16W	
L6			L40-1005-48	SMALL FIXED INDUCTOR(10UH/8)		R106			RK73GB1J224J	CHIP R 220K J 1/16W	
L7			L92-0140-05	FERRITE CHIP		R107,108			RK73GB1J223J	CHIP R 22K J 1/16W	
L9			L40-1005-48	SMALL FIXED INDUCTOR(10UH/8)		R109			RK73GB1J473J	CHIP R 47K J 1/16W	
L10,11			L92-0140-05	FERRITE CHIP		R110			RK73GB1J334J	CHIP R 330K J 1/16W	
L12,13			L40-1005-48	SMALL FIXED INDUCTOR(10UH/8)		R114-120			R92-0670-05	CHIP R 0 OHM	
X1			L78-0431-05	RESONATOR (14.7456MHZ/2P)		R121			RK73GB1J333J	CHIP R 33K J 1/16W	
X2			L77-1799-05	CRYSTAL RESONATOR(16.515MHZ/2P)		R122			RK73GB1J104J	CHIP R 100K J 1/16W	
CP1-7			R90-0724-05	MULTI-COMP 1K X4		R123			RK73GB1J103J	CHIP R 10K J 1/16W	
CP10,11			R90-1016-05	MULTI-COMP 470 X4		R124			RK73GB1J273J	CHIP R 27K J 1/16W	
CP14,15			R90-1016-05	MULTI-COMP 470 X4		R125			RK73GB1J102J	CHIP R 1.0K J 1/16W	
CP700-703			R90-1016-05	MULTI-COMP 470 X4		R126			RK73GB1J103J	CHIP R 10K J 1/16W	
R1			RK73GB1J101J	CHIP R 100 J 1/16W		R127			RK73GB1J123J	CHIP R 12K J 1/16W	
R2			RK73GB1J103J	CHIP R 10K J 1/16W		R128			RK73GB1J224J	CHIP R 220K J 1/16W	
R3			RK73GB1J473J	CHIP R 47K J 1/16W		R129			RK73GB1J104J	CHIP R 100K J 1/16W	
R4,5			RK73GB1J103J	CHIP R 10K J 1/16W		R130			RK73GB1J124J	CHIP R 120K J 1/16W	
R6			RK73GB1J105J	CHIP R 1.0M J 1/16W		R131			RK73GB1J223J	CHIP R 22K J 1/16W	
R7			RK73GB1J471J	CHIP R 470 J 1/16W		R132			RK73GB1J103J	CHIP R 10K J 1/16W	
R8			RK73FB2A2R2J	CHIP R 2.2 J 1/10W		R133			RK73GB1J273J	CHIP R 27K J 1/16W	
R9			RK73GB1J473J	CHIP R 47K J 1/16W		R134			RK73GB1J104J	CHIP R 100K J 1/16W	
R10			R92-1252-05	CHIP R 0 OHM		R135			RK73GB1J273J	CHIP R 27K J 1/16W	
R16			RK73GB1J473J	CHIP R 47K J 1/16W		R136,137			RK73GB1J103J	CHIP R 10K J 1/16W	
R27-29			R92-0685-05	CHIP R 22 J 1/2W		R138			RK73GB1J104J	CHIP R 100K J 1/16W	
R30,31			RK73GB1J102J	CHIP R 1.0K J 1/16W		R139			RK73GB1J124J	CHIP R 120K J 1/16W	
R32			RK73GB1J104J	CHIP R 100K J 1/16W		R140			R92-0670-05	CHIP R 0 OHM	
R33,34			RK73GB1J102J	CHIP R 1.0K J 1/16W		R141,142			RK73GB1J101J	CHIP R 100 J 1/16W	
R35			RK73GB1J332J	CHIP R 3.3K J 1/16W		R143,144			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R36,37			RK73GB1J102J	CHIP R 1.0K J 1/16W		R145-148			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R38			RK73GB1J183J	CHIP R 18K J 1/16W		R149-152			RK73GB1J473J	CHIP R 47K J 1/16W	
R39			RK73GB1J472J	CHIP R 4.7K J 1/16W		R153,154			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R40-43			RK73GB1J102J	CHIP R 1.0K J 1/16W		R155-157			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R44			RK73GB1J332J	CHIP R 3.3K J 1/16W		R158,159			RK73GB1J473J	CHIP R 47K J 1/16W	
R45			RK73GB1J333J	CHIP R 33K J 1/16W		R160			RK73GB1J101J	CHIP R 100 J 1/16W	
R46			RK73GB1J683J	CHIP R 68K J 1/16W		R161,162			RK73GB1J473J	CHIP R 47K J 1/16W	
R47			RK73GB1J104J	CHIP R 100K J 1/16W		R164			RK73GB1J104J	CHIP R 100K J 1/16W	
R48			RK73GB1J473J	CHIP R 47K J 1/16W		R165			RK73GB1J124J	CHIP R 120K J 1/16W	
R49			RK73GB1J183J	CHIP R 18K J 1/16W		R166-168			RK73GB1J223J	CHIP R 22K J 1/16W	
R66			RK73GB1J104J	CHIP R 100K J 1/16W		R169			RK73GB1J103J	CHIP R 10K J 1/16W	
R69			RK73GB1J104J	CHIP R 100K J 1/16W		R171			RK73GB1J154J	CHIP R 150K J 1/16W	
R70			RK73GB1J563J	CHIP R 56K J 1/16W		R172			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R71			RK73GB1J474J	CHIP R 470K J 1/16W		R173			RK73GB1J223J	CHIP R 22K J 1/16W	
R72-74			RK73GB1J222J	CHIP R 2.2K J 1/16W		R174			RK73GB1J473J	CHIP R 47K J 1/16W	
R76			RK73GB1J473J	CHIP R 47K J 1/16W		R175			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R78			RK73GB1J473J	CHIP R 47K J 1/16W		R176			RK73GB1J104J	CHIP R 100K J 1/16W	
R80			RK73GB1J474J	CHIP R 470K J 1/16W		R177-180			RK73GB1J473J	CHIP R 47K J 1/16W	
R83,84			R92-1252-05	CHIP R 0 OHM		R181			RK73GB1J103J	CHIP R 10K J 1/16W	
R86			R92-0670-05	CHIP R 0 OHM		R182			RK73GB1J473J	CHIP R 47K J 1/16W	
R87,88			R92-1252-05	CHIP R 0 OHM		R183			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R90-93			R92-0670-05	CHIP R 0 OHM		R184			RK73GB1J223J	CHIP R 22K J 1/16W	
R94			R92-1252-05	CHIP R 0 OHM		R185,186			RK73GB1J473J	CHIP R 47K J 1/16W	
R95			RK73GB1J104J	CHIP R 100K J 1/16W		R187			RK73GB1J102J	CHIP R 1.0K J 1/16W	

PARTS LIST

CONTROL UNIT (X53-3880-10)

Ref. No.	Address	New parts	Parts No.	Description			Destination	Ref. No.	Address	New parts	Parts No.	Description			Destination
R188			RK73GB1J473J	CHIP R	47K	J	1/16W	R280			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R189			RK73GB1J472J	CHIP R	4.7K	J	1/16W	R281			RK73GB1J101J	CHIP R	100	J	1/16W
R190			RK73GB1J473J	CHIP R	47K	J	1/16W	R282,283			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R191			RK73GB1J472J	CHIP R	4.7K	J	1/16W	R284			RK73GB1J101J	CHIP R	100	J	1/16W
R192			RK73GB1J103J	CHIP R	10K	J	1/16W	R285			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R193			R92-0670-05	CHIP R	0 OHM			R286,287			RK73GB1J101J	CHIP R	100	J	1/16W
R194			RK73GB1J183J	CHIP R	18K	J	1/16W	R288,289			RK73GB1J473J	CHIP R	47K	J	1/16W
R195			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R290			RK73GB1J101J	CHIP R	100	J	1/16W
R196			RK73GB1J473J	CHIP R	47K	J	1/16W	R291			RK73GB1J472J	CHIP R	4.7K	J	1/16W
R197			R92-1252-05	CHIP R	0 OHM			R292			RK73GB1J473J	CHIP R	47K	J	1/16W
R199			RK73GB1J101J	CHIP R	100	J	1/16W	R293			RK73GB1J101J	CHIP R	100	J	1/16W
R200			RK73GB1J471J	CHIP R	470	J	1/16W	R294-296			RK73GB1J473J	CHIP R	47K	J	1/16W
R201			RK73GB1J473J	CHIP R	47K	J	1/16W	R297-301			RK73GB1J101J	CHIP R	100	J	1/16W
R202,203			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R302-305			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R204			R92-1252-05	CHIP R	0 OHM			R306			RK73GB1J103J	CHIP R	10K	J	1/16W
R205,206			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R307			RK73GB1J473J	CHIP R	47K	J	1/16W
R207			RK73GB1J473J	CHIP R	47K	J	1/16W	R312-318			RK73GB1J473J	CHIP R	47K	J	1/16W
R208,209			R92-1252-05	CHIP R	0 OHM			R319-328			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R210-215			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R329			RK73GB1J101J	CHIP R	100	J	1/16W
R216			RK73GB1J473J	CHIP R	47K	J	1/16W	R331			RK73GB1J473J	CHIP R	47K	J	1/16W
R217,218			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R334			RK73GB1J392J	CHIP R	3.9K	J	1/16W
R219,220			RK73GB1J473J	CHIP R	47K	J	1/16W	R335-342			RK73GB1J473J	CHIP R	47K	J	1/16W
R221-227			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R343			RK73GB1J472J	CHIP R	4.7K	J	1/16W
R228			RK73GB1J101J	CHIP R	100	J	1/16W	R344			R92-0670-05	CHIP R	0 OHM		
R229			R92-1252-05	CHIP R	0 OHM			R345			RK73GB1J473J	CHIP R	47K	J	1/16W
R230			RK73GB1J101J	CHIP R	100	J	1/16W	R346-348			RK73GB1J101J	CHIP R	100	J	1/16W
R231			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R349-351			RK73GB1J473J	CHIP R	47K	J	1/16W
R232			RK73GB1J101J	CHIP R	100	J	1/16W	R352			RK73GB1J101J	CHIP R	100	J	1/16W
R233-236			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R353-357			RK73GB1J473J	CHIP R	47K	J	1/16W
R237			RK73GB1J473J	CHIP R	47K	J	1/16W	R358-372			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R238-240			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R700-705			RK73FB2A472J	CHIP R	4.7K	J	1/10W
R241			RK73GB1J472J	CHIP R	4.7K	J	1/16W	R706			RK73FB2A221J	CHIP R	220	J	1/10W
R242-252			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R707			RK73FB2A331J	CHIP R	330	J	1/10W
R253			RK73GB1J101J	CHIP R	100	J	1/16W	R708,709			RK73FB2A221J	CHIP R	220	J	1/10W
R254			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R710			RK73FB2A331J	CHIP R	330	J	1/10W
R255			RK73GB1J101J	CHIP R	100	J	1/16W	R711			RK73FB2A472J	CHIP R	4.7K	J	1/10W
R256			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R712			R92-1213-05	CHIP R	100	J	1/2W
R257			RK73GB1J473J	CHIP R	47K	J	1/16W	R713			R92-0686-05	CHIP R	33	J	1/2W
R258			RK73GB1J101J	CHIP R	100	J	1/16W	R714			R92-1213-05	CHIP R	100	J	1/2W
R259,260			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R715			R92-1279-05	CHIP R	33	J	1W
R261			RK73GB1J101J	CHIP R	100	J	1/16W	R716			RK73GB1J683J	CHIP R	68K	J	1/16W
R262			RK73GB1J473J	CHIP R	47K	J	1/16W	R717,718			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R263,264			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R719			RK73GB1J681J	CHIP R	680	J	1/16W
R265			RK73GB1J101J	CHIP R	100	J	1/16W	R720			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R266			RK73GB1J473J	CHIP R	47K	J	1/16W	R721			R92-0670-05	CHIP R	0 OHM		
R267,268			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R722,723			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R269			RK73GB1J101J	CHIP R	100	J	1/16W	R724			RK73GB1J682J	CHIP R	6.8K	J	1/16W
R270			RK73GB1J473J	CHIP R	47K	J	1/16W	R725			RK73GB1J103J	CHIP R	10K	J	1/16W
R271			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R726			RK73GB1J224J	CHIP R	220K	J	1/16W
R272			RK73GB1J101J	CHIP R	100	J	1/16W	R727			RK73GB1J103J	CHIP R	10K	J	1/16W
R273			RK73GB1J473J	CHIP R	47K	J	1/16W	R728			RK73GB1J154J	CHIP R	150K	J	1/16W
R274,275			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R729			RK73GB1J104J	CHIP R	100K	J	1/16W
R276			RK73GB1J101J	CHIP R	100	J	1/16W	R730			RK73GB1J103J	CHIP R	10K	J	1/16W
R277			RK73GB1J473J	CHIP R	47K	J	1/16W	R731,732			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R278			RK73GB1J102J	CHIP R	1.0K	J	1/16W	R733			RK73GB1J682J	CHIP R	6.8K	J	1/16W
R279			RK73GB1J473J	CHIP R	47K	J	1/16W	R734			RK73GB1J103J	CHIP R	10K	J	1/16W

PARTS LIST

CONTROL UNIT (X53-3880-10)
RX UNIT (X55-3050-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
VR700			R12-6423-05	TRIMMING POT.(10K/12)		Q11			DTC363EK	DIGITAL TRANSISTOR	
VR701			R05-3442-05	POTENTIOMETER(10K)		Q12			DTC114EUA	DIGITAL TRANSISTOR	
S700-705			S70-0410-15	TACT SWITCH		Q700			2SA1586(Y,GR)	TRANSISTOR	
S706			S40-2441-15	PUSH SWITCH		Q701			2SC4116(Y)	TRANSISTOR	
D1			DA204U	DIODE		Q706			DTA114EUA	DIGITAL TRANSISTOR	
D3-22			DA204U	DIODE		Q707			DTC144EUA	DIGITAL TRANSISTOR	
D24-28			DA204U	DIODE		Q708			DTA114EUA	DIGITAL TRANSISTOR	
D30-32			DA204U	DIODE		Q709,710			DTC144EUA	DIGITAL TRANSISTOR	
D34-39			DA204U	DIODE		RX UNIT (X55-3050-XX) -10:K, -11:K2, -12:K3					
D706			DA204U	DIODE		D9			B30-2130-05	LED(YG/8)	
D707			HSM88AS	DIODE		C1			CC73GCH1H050C	CHIP C 5.0PF C	
D708			DA204U	DIODE		C2,3			CK73GB1H102K	CHIP C 1000PF K	
D709			HSM88AS	DIODE		C4-6			CK73GB1H103K	CHIP C 0.010UF K	
D710			MINISMD075-02	VARISTOR		C7			CK73GB1H102K	CHIP C 1000PF K	
D711,712			DA204U	DIODE		C8			C92-0002-05	CHIP-TAN 0.22UF 35WV	
IC1			TC7S66FU	IC(ANALOG SWITCH)		C9			CK73FB1C105K	CHIP C 1.0UF K	
IC3			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		C10			C92-0545-05	CHIP-TAN 2.2UF 6.3WV	
IC4			TA7805F	IC		C11			CK73GB1H102K	CHIP C 1000PF K	
IC5			NJM78L08UA	IC(VOLTAGE REGULATOR/ +8V)		C12			CC73GCH1H470J	CHIP C 47PF J	
IC6			TA7805F	IC		C13			CK73GB1H102K	CHIP C 1000PF K	
IC7			AT29C020-90TI	IC		C14			C92-0001-05	CHIP-C 0.1UF 35WV	
IC10			RH5VL42C	IC(REGULATOR)		C15	*		CC73FC1H150G	CHIP C 15PF G	
IC12,13			NJM4558E	IC(OP AMP X2)		C16			CC73GCH1H150J	CHIP C 15PF J	
IC14			BU4053BCF	IC(ANALOG SW)		C17			CC73FC1H1470J	CHIP C 47PF J	
IC15,16	*		TC74VHC245FT	IC		C18-20			CK73GB1H102K	CHIP C 1000PF K	
IC17,18	*		30622M4-103GP	MPU		C21	*		CC73FC1H120G	CHIP C 12PF G	
IC22,23			NJM4558E	IC(OP AMP X2)		C22			CK73GB1H102K	CHIP C 1000PF K	
IC24			TC74HC4040AF	IC(BINARY COUNTER)		C23			CC73GCH1H040C	CHIP C 4.0PF C	
IC25			TC7S04F	IC(2CH NAND GATE)		C24			CK73GB1H103K	CHIP C 0.010UF K	
IC27	*		PCM3000E	IC		C25			CC73FC1H1470J	CHIP C 47PF J	
IC29			BU4053BCF	IC(ANALOG SW)		C26			CK73GB1H102K	CHIP C 1000PF K	
IC30	*		ADSP2185BST133	IC(DSP MICROCOMPUTER)		C27			CK73GB1H103K	CHIP C 0.010UF K	
IC31,32			NJM4558E	IC(OP AMP X2)		C28			CK73FB1E104K	CHIP C 0.10UF K	
IC33			M62364FP	IC(D/A CONVERTER)		C29			CK73GB1H103K	CHIP C 0.010UF K	
IC34			NJM4558E	IC(OP AMP X2)		C30,31			CK73GB1H102K	CHIP C 1000PF K	
IC35			TC7S32FU	IC(2INPUT OR GATE)		C32	*		CC73FC1H150G	CHIP C 15PF G	K,K2
IC36			NJM4558E	IC(OP AMP X2)		C32			CC73FC1H180J	CHIP C 18PF J	K3
IC37			BU4053BCF	IC(ANALOG SW)		C33			CC73GCH1H220J	CHIP C 22PF J	
IC38			TC7S00FU	IC(NAND GATE)		C34-36			CK73GB1H102K	CHIP C 1000PF K	
IC39			BU4094BCFV	IC(8bit SHIFT/STORE REGISTER)		C37			CK73GB1H103K	CHIP C 0.010UF K	
IC40			NJM4558E	IC(OP AMP X2)		C38			CK73FB1C105K	CHIP C 1.0UF K	
IC42			ADM232LAR	IC(RS-232C DRIVERS/RECEIVERS)		C39			CC73GCH1H390J	CHIP C 39PF J	
IC45			LA4422	IC(AF POWER AMP/ 5.8W)		C40	*		CC73FC1H150G	CHIP C 15PF G	
IC46-49			TC7S32FU	IC(2INPUT OR GATE)		C41			CK73GB1H103K	CHIP C 0.010UF K	
IC700-703			BU2114F	IC(LED DRIVER)		C42			CK73FB1E104K	CHIP C 0.10UF K	
IC704			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		C43,44	*		CC73FC1H150G	CHIP C 15PF G	
IC705			TA78L05F	IC(VOLTAGE REGULATOR/ +5V)		C45,46			CK73GB1H102K	CHIP C 1000PF K	
IC706			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		C47	*		CC73FC1H150G	CHIP C 15PF G	
Q1			2SK1824	FET		C48			C92-0628-05	CHIP-TAN 10UF 10WV	
Q2			DTC114EUA	DIGITAL TRANSISTOR		C49			CC73GCH1H050B	CHIP C 0.5PF B	
Q5			2SK1824	FET		C50			CC73FC1H150G	CHIP C 15PF G	
Q8			DTC144EUA	DIGITAL TRANSISTOR		C51,52			CK73GB1H102K	CHIP C 1000PF K	
Q9			DTC114EUA	DIGITAL TRANSISTOR		C53			C92-0628-05	CHIP-TAN 10UF 10WV	
Q10			DTC144EUA	DIGITAL TRANSISTOR		C54			CK73GB1H102K	CHIP C 1000PF K	
						C55			CK73GB1H103K	CHIP C 0.010UF K	

PARTS LIST

RX UNIT (X55-3050-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination	Ref. No.	Address	New parts	Parts No.	Description			Destination
C56			C92-0628-05	CHIP-TAN	10UF	10WV		C125			CC73GCH1H030C	CHIP C	3.0PF	C	
C57			CC73GCH1H0R5B	CHIP C	0.5PF	B		C126			CK73FB1E104K	CHIP C	0.10UF	K	
C58			CK73GB1H102K	CHIP C	1000PF	K		C127			CK73GB1H562K	CHIP C	5600PF	K	
C59			C92-0628-05	CHIP-TAN	10UF	10WV		C128			CC73GCH1H2R5C	CHIP C	2.5PF	C	
C60,61			CK73FB1E104K	CHIP C	0.10UF	K		C129			CK73GB1C393K	CHIP C	0.039UF	K	
C62			CK73GB1H103K	CHIP C	0.010UF	K		C130			CC73GCH1H040C	CHIP C	4.0PF	C	
C65			CC73GCH1H150J	CHIP C	15PF	J		C131			CC73GCH1H680J	CHIP C	68PF	J	
C66			CK73GB1H102K	CHIP C	1000PF	K		C132			CK73FB1E104K	CHIP C	0.10UF	K	
C67			CC73GCH1H270J	CHIP C	27PF	J		C133			CK73GB1H103K	CHIP C	0.010UF	K	
C68			CC73GCH1H150J	CHIP C	15PF	J		C134			C92-0633-05	CHIP-TAN	22UF	10WV	
C69			CK73GB1H102K	CHIP C	1000PF	K	K3	C135			CK73GB1H103K	CHIP C	0.010UF	K	
C69,70			CK73GB1H102K	CHIP C	1000PF	K	K,K2	C136			CC73GCH1H030C	CHIP C	3.0PF	C	
C70			CC73GCH1H050C	CHIP C	5.0PF	C	K3	C137			CK73GB1H103K	CHIP C	0.010UF	K	
C71			CC73GCH1H270J	CHIP C	27PF	J		C138			CK73GB1C333K	CHIP C	0.033UF	K	
C72			CK73GB1H103K	CHIP C	0.010UF	K		C139			CC73GCH1H680J	CHIP C	68PF	J	
C73,74			CK73GB1H102K	CHIP C	1000PF	K		C140			C92-0001-05	CHIP-C	0.1UF	35WV	
C75			CC73GCH1H270J	CHIP C	27PF	J		C141			CC73GCH1H030C	CHIP C	3.0PF	C	
C76			CC73GCH1H100D	CHIP C	10PF	D		C142			CK73FB1E104K	CHIP C	0.10UF	K	
C77			CK73FB1E104K	CHIP C	0.10UF	K		C143			CK73GB1H103K	CHIP C	0.010UF	K	
C78			CC73GCH1H090D	CHIP C	9.0PF	D	K2	C144			CC73GCH1H220J	CHIP C	22PF	J	
C78			CC73GCH1H100D	CHIP C	10PF	D	K	C145			CK73GB1E223K	CHIP C	0.022UF	K	
C78			CC73GCH1H120J	CHIP C	12PF	J	K3	C146-148			CK73GB1H103K	CHIP C	0.010UF	K	
C79			CC73GCH1H150J	CHIP C	15PF	J		C149			CK73GB1H102K	CHIP C	1000PF	K	
C80			CC73GCH1H180J	CHIP C	18PF	J	K2	C150			C92-0628-05	CHIP-TAN	10UF	10WV	
C80			CC73GCH1H220J	CHIP C	22PF	J	K	C151			CK73GB1H103K	CHIP C	0.010UF	K	
C80			CC73GCH1H270J	CHIP C	27PF	J	K3	C152			CC73GCH1H090D	CHIP C	9.0PF	D	
C82			C92-0728-05	ELECTRO C	470UF	16WV		C153			CK73GB1H102K	CHIP C	1000PF	K	
C83			CK73GB1H103K	CHIP C	0.010UF	K		C154			CK73GB1H103K	CHIP C	0.010UF	K	
C84			C92-0589-05	CHIP-TAN	47UF	6.3WV		C155			CC73GCH1H220J	CHIP C	22PF	J	
C85			CK73GB1H103K	CHIP C	0.010UF	K		C156,157			CK73GB1H102K	CHIP C	1000PF	K	
C86,87			CC73GCH1H150J	CHIP C	15PF	J	K3	C158,159			CK73GB1H103K	CHIP C	0.010UF	K	
C88			C92-0633-05	CHIP-TAN	22UF	10WV		C160			CK73FB1E104K	CHIP C	0.10UF	K	
C89-91			CK73GB1H103K	CHIP C	0.010UF	K		C161			CK73GB1H102K	CHIP C	1000PF	K	
C92			CC73GCH1H040C	CHIP C	4.0PF	C		C162			CK73GB1H103K	CHIP C	0.010UF	K	
C93			CC73GCH1H680J	CHIP C	68PF	J		C163			CC73GCH1H090D	CHIP C	9.0PF	D	
C94,95			CC73GCH1H040C	CHIP C	4.0PF	C		C164			CK73GB1H102K	CHIP C	1000PF	K	
C96			CM73F2H120J	CHIP C	12PF	J		C165			C92-0003-05	CHIP-TAN	0.47UF	25WV	
C97			CC73GCH1H220J	CHIP C	22PF	J	K3	C166			CC73GCH1H080D	CHIP C	8.0PF	D	
C98			CC73GCH1H180J	CHIP C	18PF	J		C167			CK73FB1E104K	CHIP C	0.10UF	K	
C100			CC73GCH1H040C	CHIP C	4.0PF	C		C168			CK73GB1H103K	CHIP C	0.010UF	K	
C101			CK73FB1E223K	CHIP C	0.022UF	K		C169,170			C92-0628-05	CHIP-TAN	10UF	10WV	
C104			CC73GCH1H680J	CHIP C	68PF	J		C171			C92-0003-05	CHIP-TAN	0.47UF	25WV	
C105,106			C92-0589-05	CHIP-TAN	47UF	6.3WV		C172,173			CK73FB1E104K	CHIP C	0.10UF	K	
C107			CK73GB1H102K	CHIP C	1000PF	K		C174,175			CK73GB1H102K	CHIP C	1000PF	K	
C108-110			CK73GB1H103K	CHIP C	0.010UF	K		C176,177			CK73FB1E104K	CHIP C	0.10UF	K	
C111,112			CK73FB1E104K	CHIP C	0.10UF	K		C178,179			CK73GB1H221K	CHIP C	220PF	K	
C113			CK73GB1H103K	CHIP C	0.010UF	K		C180			CK73FB1E104K	CHIP C	0.10UF	K	
C114			CK73GB1H102K	CHIP C	1000PF	K		C181,182			CK73GB1H221K	CHIP C	220PF	K	
C115			CK73FB1E104K	CHIP C	0.10UF	K		C183-186			CK73FB1E104K	CHIP C	0.10UF	K	
C116			CK73GB1H103K	CHIP C	0.010UF	K		C187,188			CK73GB1H102K	CHIP C	1000PF	K	
C117			CK73GB1H102K	CHIP C	1000PF	K		C189,190			CC73GCH1H270J	CHIP C	27PF	J	
C118-120			CK73GB1H103K	CHIP C	0.010UF	K		C191,192			CK73FB1E104K	CHIP C	0.10UF	K	
C121			CC73GCH1H030C	CHIP C	3.0PF	C		C193			CC73GCH1H680J	CHIP C	68PF	J	
C122			CK73FB1E104K	CHIP C	0.10UF	K		C194			CC73GCH1H220J	CHIP C	22PF	J	
C123			CK73GB1H562K	CHIP C	5600PF	K		C195			CK73GB1H102K	CHIP C	1000PF	K	
C124			C92-0633-05	CHIP-TAN	22UF	10WV		C196			C92-0628-05	CHIP-TAN	10UF	10WV	

PARTS LIST

RX UNIT (X55-3050-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination	Ref. No.	Address	New parts	Parts No.	Description			Destination
C197			CK73GB1H102K	CHIP C	1000PF	K		L17,18			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)			
C198-200			C92-0628-05	CHIP-TAN	10UF	10WV		L19			L40-4775-34	SMALL FIXED INDUCTOR(47NH/8)			
C201,202			CK73FB1E104K	CHIP C	0.10UF	K		L20			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)			
C203			C92-0775-05	CHIP-TAN	47UF	4WV		L21			L40-4775-34	SMALL FIXED INDUCTOR(47NH/8)			
C204			C92-0628-05	CHIP-TAN	10UF	10WV		L22			L40-6875-34	SMALL FIXED INDUCTOR(68NH/8)			
C207			CK73GB1H102K	CHIP C	1000PF	K		L23			L40-4775-34	SMALL FIXED INDUCTOR(47NH/8)			
C208			CK73FB1E104K	CHIP C	0.10UF	K		L24			L40-1015-34	SMALL FIXED INDUCTOR(100UH/8)			
C209			CK73GB1H103K	CHIP C	0.010UF	K		L25			L40-3975-34	SMALL FIXED INDUCTOR(39NH/8)			K3
C210			C92-0633-05	CHIP-TAN	22UF	10WV		L26			L40-4775-34	SMALL FIXED INDUCTOR(47NH/8)			
C211			CC73GCH1H080D	CHIP C	8.0PF	D		L27,28			L34-4527-05	COIL			
C212			CK73GB1H103K	CHIP C	0.010UF	K		L30			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)			
C213			C92-0514-05	CHIP-TAN	2.2UF	10WV		L31,32			L34-4527-05	COIL			
C217			CK73GB1H102K	CHIP C	1000PF	K		L33			L40-1015-34	SMALL FIXED INDUCTOR(100UH/8)			
C218			CC73GCH1H220J	CHIP C	22PF	J		L34,35			L40-1281-37	SMALL FIXED INDUCTOR(0.120UH/8)			
C219			CC73GCH1H101J	CHIP C	100PF	J		L36,37			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)			
C220			CC73GCH1H180J	CHIP C	18PF	J	K2	L38-41			L34-4527-05	COIL			
C220			CC73GCH1H220J	CHIP C	22PF	J	K	L42			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)			
C220			CC73GCH1H270J	CHIP C	27PF	J	K3	L43,44			L34-4527-05	COIL			
C221	*		CC73FCH1H040B	CHIP C	4.0PF	B	K3	L45			L40-1281-37	SMALL FIXED INDUCTOR(0.120UH/8)			
C221,222	*		CC73FCH1H040B	CHIP C	4.0PF	B	K,K2	L46			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)			
C222			CC73FCH1H020B	CHIP C	2.0PF	B	K3	L47			L40-1281-37	SMALL FIXED INDUCTOR(0.120UH/8)			
C226			CK73GB1H103K	CHIP C	0.010UF	K		L48			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)			
C228,229			CK73FB1E104K	CHIP C	0.10UF	K		L49,50			L40-4775-34	SMALL FIXED INDUCTOR(47NH/8)			
TC1,2			C05-0393-05	CERAMIC TRIMMER CAP(8P/12)				L51			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)			
CN1			E04-0409-05	RF COAXIAL RECEPTACLE(SMB)				L52,53			L34-4530-05	COIL			
CN2			E04-0154-05	PIN SOCKET				L54			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)			
CN3-5			E40-5538-05	PIN ASSY				L55			L40-1015-34	SMALL FIXED INDUCTOR(100UH/8)			
CN6			E40-5736-05	FLAT CABLE CONNECTOR				L56			L40-1075-34	SMALL FIXED INDUCTOR(10NH/8)			
CN7			E04-0409-05	RF COAXIAL RECEPTACLE(SMB)				L58			L40-4775-34	SMALL FIXED INDUCTOR(47NH/8)			
CF1			L72-0956-05	CERAMIC FILTER				L64			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)			
CF2			L72-0953-05	CERAMIC FILTER				L65			L40-3375-34	SMALL FIXED INDUCTOR(33NH/8)			
CF3			L72-0956-05	CERAMIC FILTER				L66			L40-1885-34	SMALL FIXED INDUCTOR(180NH/8)			
CF4			L72-0953-05	CERAMIC FILTER				X1,2	*		L77-1788-05	CRYSTAL RESONATOR(44.4MHZ/2P)			
CF5	*		L72-0976-05	CERAMIC FILTER				XF1	*		L71-0542-05	MCF (44.85MHZ WIDE)			
L1			L34-4523-05	AIR-CORE COIL				XF2	*		L71-0543-05	MCF (44.85MHZ NARR)			
L2			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)				XF3	*		L71-0544-05	MCF (44.85MHZ WIDE)			
L3	*		L79-1737-05	HELICAL BLOCK			K	XF4	*		L71-0545-05	MCF (44.85MHZ NARR)			
L3	*		L79-1738-05	HELICAL BLOCK			K2								
L3	*		L79-1739-05	HELICAL BLOCK			K3	CP1			R90-0724-05	MULTI-COMP 1K X4			
L4			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)				R1			RK73GB1J105J	CHIP R 1.0M J 1/16W			
L5			L40-4775-34	SMALL FIXED INDUCTOR(47NH/8)				R2			RK73GB1J183J	CHIP R 18K J 1/16W			
L6,7			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)				R3,4			RK73GB1J473J	CHIP R 47K J 1/16W			
L8	*		L34-4586-05	AIR-CORE COIL			K	R5			R92-1252-05	CHIP R 0 OHM			
L8	*		L34-4598-05	AIR-CORE COIL			K2	R6			RK73GB1J223J	CHIP R 22K J 1/16W			
L8	*		L34-4599-05	AIR-CORE COIL			K3	R7			RK73GB1J470J	CHIP R 47 J 1/16W			
L9			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)				R8			R92-1252-05	CHIP R 0 OHM			
L10			L34-4586-05	AIR-CORE COIL			K	R9			RK73GB1J560J	CHIP R 56 J 1/16W			
L10			L34-4598-05	AIR-CORE COIL			K2	R10,11			RK73GB1J102J	CHIP R 1.0K J 1/16W			
L10			L34-4599-05	AIR-CORE COIL			K3	R12			RK73GB1J152J	CHIP R 1.5K J 1/16W			
L11			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)				R13			RK73GB1J182J	CHIP R 1.8K J 1/16W			
L12			L40-1085-34	SMALL FIXED INDUCTOR(100NH/8)				R14			RK73GB1J560J	CHIP R 56 J 1/16W			
L13			L40-8271-34	SMALL FIXED INDUCTOR(82NH/8)				R15			RK73GB1J182J	CHIP R 1.8K J 1/16W			
L14,15			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)				R16			RK73GB1J222J	CHIP R 2.2K J 1/16W			
L16	*		L79-1594-05	HELICAL BLOCK			K	R17			RK73GB1J102J	CHIP R 1.0K J 1/16W			
L16	*		L79-1734-05	HELICAL BLOCK			K2	R18,19			RK73GB1J103J	CHIP R 10K J 1/16W			
L16	*		L79-1735-05	HELICAL BLOCK			K3	R20			RK73FB2A100J	CHIP R 10 J 1/10W			
L16	*							R21			RK73GB1J561J	CHIP R 560 J 1/16W			

TKR-740

PARTS LIST

RX UNIT (X55-3050-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
R22			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R23			RK73GB1J122J	CHIP R	1.2K	J	1/16W
R24			R92-1252-05	CHIP R	0 OHM		
R25			RK73FB2A100J	CHIP R	10	J	1/10W
R26			RK73GB1J101J	CHIP R	100	J	1/16W
R27			R92-1252-05	CHIP R	0 OHM		K
R28			R92-1252-05	CHIP R	0 OHM		K2
R29			RK73GB1J473J	CHIP R	47K	J	1/16W
R30			RK73GB1J101J	CHIP R	100	J	1/16W
R31			R92-1252-05	CHIP R	0 OHM		K3
R32			RK73GB1J101J	CHIP R	100	J	1/16W
R33			R92-1252-05	CHIP R	0 OHM		
R34			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R35,36			RK73GB1J181J	CHIP R	180	J	1/16W
R37			RK73GB1J270J	CHIP R	27	J	1/16W
R38			R92-0670-05	CHIP R	0 OHM		
R39			RK73GB1J101J	CHIP R	100	J	1/16W
R40			R92-1252-05	CHIP R	0 OHM		
R41			RK73GB1J271J	CHIP R	270	J	1/16W
R42,43			R92-1252-05	CHIP R	0 OHM		
R44			RK73GB1J470J	CHIP R	47	J	1/16W
R45			RK73GB1J103J	CHIP R	10K	J	1/16W
R46			RK73GB1J472J	CHIP R	4.7K	J	1/16W
R47			RK73GB1J104J	CHIP R	100K	J	1/16W
R48			RK73GB1J470J	CHIP R	47	J	1/16W
R49			RK73GB1J271J	CHIP R	270	J	1/16W
R50,51			RK73GB1J222J	CHIP R	2.2K	J	1/16W
R52			RK73GB1J101J	CHIP R	100	J	1/16W
R53,54			RK73GB1J103J	CHIP R	10K	J	1/16W
R55			RK73GB1J222J	CHIP R	2.2K	J	1/16W
R56			RK73GB1J223J	CHIP R	22K	J	1/16W
R57			RK73GB1J101J	CHIP R	100	J	1/16W
R58			RK73GB1J472J	CHIP R	4.7K	J	1/16W
R59			R92-1252-05	CHIP R	0 OHM		
R60			RK73GB1J101J	CHIP R	100	J	1/16W
R61			RK73GB1J472J	CHIP R	4.7K	J	1/16W
R62			R92-1252-05	CHIP R	0 OHM		
R63			RK73GB1J471J	CHIP R	470	J	1/16W
R64			RK73GB1J101J	CHIP R	100	J	1/16W
R65			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R66			RK73GB1J104J	CHIP R	100K	J	1/16W
R67,68			RK73GB1J821J	CHIP R	820	J	1/16W
R69			R92-1252-05	CHIP R	0 OHM		
R70			RK73GB1J470J	CHIP R	47	J	1/16W
R71			RK73FB2A120J	CHIP R	12	J	1/10W
R72			RK73GB1J100J	CHIP R	10	J	1/16W
R73,74			RK73GB1J471J	CHIP R	470	J	1/16W
R75			RK73GB1J104J	CHIP R	100K	J	1/16W
R76			RK73GB1J182J	CHIP R	1.8K	J	1/16W
R77			RK73GB1J102J	CHIP R	1.0K	J	1/16W
R78			RK73GB1J103J	CHIP R	10K	J	1/16W
R79			RK73GB1J684J	CHIP R	680K	J	1/16W
R80			RK73GB1J122J	CHIP R	1.2K	J	1/16W
R81			RK73GB1J103J	CHIP R	10K	J	1/16W
R82			RK73FB2A220J	CHIP R	22	J	1/10W
R83			RK73GB1J684J	CHIP R	680K	J	1/16W

Ref. No.	Address	New parts	Parts No.	Description			Destination
R84			RK73GB1J103J	CHIP R	10K	J	1/16W
R85			RK73GB1J182J	CHIP R	1.8K	J	1/16W
R90			RK73GB1J681J	CHIP R	680	J	1/16W
R92			RK73GB1J681J	CHIP R	680	J	1/16W
R93			RK73GB1J680J	CHIP R	68	J	1/16W
R95			RK73GB1J152J	CHIP R	1.5K	J	1/16W
R96			RK73GB1J470J	CHIP R	47	J	1/16W
R97			RK73FB2A220J	CHIP R	22	J	1/10W
R98			RK73GB1J680J	CHIP R	68	J	1/16W
R99			RK73GB1J152J	CHIP R	1.5K	J	1/16W
R100			RK73GB1J470J	CHIP R	47	J	1/16W
R101			RK73GB1J220J	CHIP R	22	J	1/16W
R102			RK73GB1J680J	CHIP R	68	J	1/16W
R103			RK73GB1J101J	CHIP R	100	J	1/16W
R104			RK73GB1J220J	CHIP R	22	J	1/16W
R105			RK73GB1J680J	CHIP R	68	J	1/16W
R106			RK73GB1J222J	CHIP R	2.2K	J	1/16W
R107			RK73GB1J564J	CHIP R	560K	J	1/16W
R108			RK73GB1J473J	CHIP R	47K	J	1/16W
R109			RK73GB1J223J	CHIP R	22K	J	1/16W
R111			RK73GB1J222J	CHIP R	2.2K	J	1/16W
R114			RK73GB1J394J	CHIP R	390K	J	1/16W
R115,116			RK73GB1J222J	CHIP R	2.2K	J	1/16W
R118			RK73GB1J104J	CHIP R	100K	J	1/16W
R119			RK73GB1J393J	CHIP R	39K	J	1/16W
R120			R92-0679-05	CHIP R	0 OHM		
R121			RK73GB1J104J	CHIP R	100K	J	1/16W
R122			RK73GB1J680J	CHIP R	68	J	1/16W
R123			RK73GB1J681J	CHIP R	680	J	1/16W
R124,125			RK73GB1J101J	CHIP R	100	J	1/16W
R126			RK73GB1J183J	CHIP R	18K	J	1/16W
R127			RK73GB1J681J	CHIP R	680	J	1/16W
R128			RK73GB1J680J	CHIP R	68	J	1/16W
R129			RK73GB1J152J	CHIP R	1.5K	J	1/16W
R130			RK73GB1J101J	CHIP R	100	J	1/16W
R131			RK73GB1J470J	CHIP R	47	J	1/16W
R132			RK73GB1J103J	CHIP R	10K	J	1/16W
R133			RK73GB1J680J	CHIP R	68	J	1/16W
R134			RK73GB1J152J	CHIP R	1.5K	J	1/16W
R135			RK73GB1J103J	CHIP R	10K	J	1/16W
R136			RK73GB1J470J	CHIP R	47	J	1/16W
R137			RK73GB1J220J	CHIP R	22	J	1/16W
R138			RK73GB1J680J	CHIP R	68	J	1/16W
R139			RK73GB1J101J	CHIP R	100	J	1/16W
R140			RK73GB1J104J	CHIP R	100K	J	1/16W
R141			RK73FB2A681J	CHIP R	680	J	1/10W
R142			RK73GB1J220J	CHIP R	22	J	1/16W
R143			RK73GB1J680J	CHIP R	68	J	1/16W
R144			RK73GB1J104J	CHIP R	100K	J	1/16W
R145			RK73GB1J680J	CHIP R	68	J	1/16W
R146			RK73FB2A681J	CHIP R	680	J	1/10W
R147			RK73GB1J222J	CHIP R	2.2K	J	1/16W
R148			RK73GB1J562J	CHIP R	5.6K	J	1/16W
R149,150			RK73GB1J154J	CHIP R	150K	J	1/16W
R151			RK73GB1J222J	CHIP R	2.2K	J	1/16W
R152,153			RK73GB1J103J	CHIP R	10K	J	1/16W

PARTS LIST

RX UNIT (X55-3050-XX)
TX UNIT (X56-3040-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R154,155			RK73GB1J223J	CHIP R 22K J 1/16W		IC20		*	AD9835BRU	MOS IC	
R156,157			RK73GB1J332J	CHIP R 3.3K J 1/16W		IC21			TC7S66FU	IC(ANALOG SWITCH)	
R158			RK73GB1J472J	CHIP R 4.7K J 1/16W		Q1			2SC3357	TRANSISTOR	
R159			RK73GB1J272J	CHIP R 2.7K J 1/16W		Q3			2SC3120	TRANSISTOR	
R160			RK73GB1J472J	CHIP R 4.7K J 1/16W		Q5			2SC3357	TRANSISTOR	
R161			RK73GB1J272J	CHIP R 2.7K J 1/16W		Q6			2SC4215(Y)	TRANSISTOR	
R162			RK73GB1J152J	CHIP R 1.5K J 1/16W		Q7			2SC2873(Y)	TRANSISTOR	
R163			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q8,9			2SK508NV(K53)	FET	
R164,165			RK73GB1J473J	CHIP R 47K J 1/16W		Q10			2SC3722K(S)	TRANSISTOR	
R166			RK73GB1J474J	CHIP R 470K J 1/16W		Q12			2SC3722K(S)	TRANSISTOR	
R167			RK73GB1J224J	CHIP R 220K J 1/16W		Q13			DTC114EUA	DIGITAL TRANSISTOR	
R168			RK73GB1J122J	CHIP R 1.2K J 1/16W		Q14			2SC4215(Y)	TRANSISTOR	
R169			RK73GB1J103J	CHIP R 10K J 1/16W		Q16			2SB1386(R)	TRANSISTOR	
R170			RK73GB1J104J	CHIP R 100K J 1/16W		Q17			2SC3722K(S)	TRANSISTOR	
R171			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q18,19			DTC114EUA	DIGITAL TRANSISTOR	
R172			RK73GB1J104J	CHIP R 100K J 1/16W		Q20			2SB1386(R)	TRANSISTOR	
R173,174			RK73GB1J103J	CHIP R 10K J 1/16W		Q22			DTC114EUA	DIGITAL TRANSISTOR	
R175			RK73GB1J224J	CHIP R 220K J 1/16W		Q24,25			2SC3357	TRANSISTOR	
R176-178			RK73GB1J104J	CHIP R 100K J 1/16W		Q26			2SC4081(R)	TRANSISTOR	
R179			R92-0670-05	CHIP R 0 OHM		Q28			2SC4081(R)	TRANSISTOR	
R180			RK73GB1J331J	CHIP R 330 J 1/16W		Q29			DTC114EUA	DIGITAL TRANSISTOR	
R181			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q30			2SK1824	FET	
R182			RK73GB1J104J	CHIP R 100K J 1/16W		Q31,32			2SC3357	TRANSISTOR	
R183			RK73GB1J560J	CHIP R 56 J 1/16W		Q33			2SC4081(R)	TRANSISTOR	
R184			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q34,35			2SJ106(GR)	FET	
R185			R92-1252-05	CHIP R 0 OHM		Q36-38			DTC114EUA	DIGITAL TRANSISTOR	
R186			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q39			2SC4081(R)	TRANSISTOR	
R187-191			R92-1252-05	CHIP R 0 OHM		TH1,2			157-302-65801	THERMISTOR	
R192			RK73GB1J104J	CHIP R 100K J 1/16W		A1		*	W02-1968-05	DBM	
R193			RK73FB2A220J	CHIP R 22 J 1/10W		A1		*	W02-1982-05	DBM	
R195			RK73GB1J331J	CHIP R 330 J 1/16W		TX UNIT (X56-3040-10)					
R196			RK73GB1J221J	CHIP R 220 J 1/16W		D50,51			B30-2130-05	LED(YG)	
R197			RK73GB1J153J	CHIP R 15K J 1/16W		D52			B30-2048-05	LED	
R198			RK73GB1J102J	CHIP R 1.0K J 1/16W		C1,2			CK73GB1H102K	CHIP C 1000PF K	
R199			RK73GB1J392J	CHIP R 3.9K J 1/16W		C3,4			CK73GB1H471K	CHIP C 470PF K	
D2-4			1SV283	VARIABLE CAPACITANCE DIODE		C5		*	CC73FCH1H080B	CHIP C 8.0PF B	
D6			1SV283	VARIABLE CAPACITANCE DIODE		C6			CK73GB1H102K	CHIP C 1000PF K	
D10			DAN235K	DIODE		C7		*	CC73FCH1H120G	CHIP C 12PF G	
D11			DAN202U	DIODE		C8			CC73FCH1H470J	CHIP C 47PF J	
IC1			SA7025DK	IC(PLL SYSTEM)		C9		*	CC73FCH1H120G	CHIP C 12PF G	
IC2			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		C10			CC73FCH1H560J	CHIP C 56PF J	
IC3			BU4094BCFV	IC(8bit SHIFT/STORE REGISTER)		C11			CK73GB1H103K	CHIP C 0.010UF K	
IC4			TA7808S	IC(REGULATOR)		C12			CC73GCH1H010B	CHIP C 1.0PF B	
IC5			NJM2904E	IC(OP AMP X2)		C13			CK73GB1H102K	CHIP C 1000PF K	
IC6			BU4053BCF	IC(ANALOG SW)		C14			CC73GCH1H010B	CHIP C 1.0PF B	
IC7,8			TA31137FN	IC(IF IC)		C15,16			CK73GB1H102K	CHIP C 1000PF K	
IC9			M62364FP	IC(D/A CONVERTER)		C17		*	CC73FCH1H100B	CHIP C 10PF B	
IC10			AT2408N10S12.5	IC(8kbit SERIAL EEPROM)		C19-22			CK73GB1H102K	CHIP C 1000PF K	
IC11,12			NJM4558E	IC(OP AMP X2)		C23		*	CC73FCH1H080B	CHIP C 8.0PF B	
IC13			NJM78L08UA	IC(VOLTAGE REGULATOR/ +8V)		C24		*	CK73GB1H103K	CHIP C 0.010UF K	
IC14			NJM2904E	IC(OP AMP X2)		C25		*	CC73FCH1H080B	CHIP C 8.0PF B	
IC15			NJM4558E	IC(OP AMP X2)		C26			CK73GB1H102K	CHIP C 1000PF K	
IC16			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		C27,28			CC73GCH1H010B	CHIP C 1.0PF B	
IC17			AM1	IC		C29			C92-0728-05	ELECTROLYTIC CAP	
IC18			TC7S66FU	IC(ANALOG SWITCH)							
IC19			TC74HC14AF	IC(SCHMITT INVERTER)							

PARTS LIST

TX UNIT (X56-3040-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C30			CK73GB1H102K	CHIP C 1000PF K		C125,126			CK73GB1H103K	CHIP C 0.010UF K	
C31			CK73GB1H103K	CHIP C 0.010UF K		C127			C92-0589-05	CHIP-TAN 47UF 6.3WV	
C32			C92-0633-05	CHIP-TAN 22UF 10WV		C128			CK73FB1E104K	CHIP C 0.10UF K	
C33			CK73GB1H102K	CHIP C 1000PF K		C130			CK73GB1H103K	CHIP C 0.010UF K	
C34			CK73GB1H103K	CHIP C 0.010UF K		C131			C92-0628-05	CHIP-TAN 10UF 10WV	
C35,36			CC73GCH1H100D	CHIP C 10PF D		C132			CK73GB1H102K	CHIP C 1000PF K	
C37			CK73GB1H102K	CHIP C 1000PF K		C133			C92-0628-05	CHIP-TAN 10UF 10WV	
C38			CC73GCH1H470J	CHIP C 47PF J		C134			CK73GB1H102K	CHIP C 1000PF K	
C39			CK73GB1H471K	CHIP C 470PF K		C135,136			C92-0628-05	CHIP-TAN 10UF 10WV	
C40			C92-0633-05	CHIP-TAN 22UF 10WV		C138			C92-0628-05	CHIP-TAN 10UF 10WV	
C41			CK73FB1E104K	CHIP C 0.10UF K		C139			C92-0004-05	CHIP-TAN 1.0UF 16WV	
C42			CK73GB1H103K	CHIP C 0.010UF K		C140			CK73GB1H103K	CHIP C 0.010UF K	
C43			CK73GB1H471K	CHIP C 470PF K		C141			CK73GB1H102K	CHIP C 1000PF K	
C45			C92-0633-05	CHIP-TAN 22UF 10WV		C143			CC73GCH1H050C	CHIP C 5.0PF C	
C46			CK73FB1E104K	CHIP C 0.10UF K		C144			CK73GB1H102K	CHIP C 1000PF K	
C47			CK73GB1H103K	CHIP C 0.010UF K		C145			CK73GB1H103K	CHIP C 0.010UF K	
C50,51			CK73GB1H471K	CHIP C 470PF K		C146			CC73GCH1H050C	CHIP C 5.0PF C	
C52			CK73GB1H102K	CHIP C 1000PF K		C147			CK73FB1E104K	CHIP C 0.10UF K	
C53-55			CK73GB1H471K	CHIP C 470PF K		C165,166			CC73GCH1H101J	CHIP C 100PF J	
C56			CC73GCH1H471J	CHIP C 470PF J		C167			CK73GB1H102K	CHIP C 1000PF K	
C57			C92-0560-05	CHIP-TAN 10UF 6.3WV		C168			C92-0633-05	CHIP-TAN 22UF 10WV	
C58,59			CK73GB1H102K	CHIP C 1000PF K		C169			CK73GB1H103K	CHIP C 0.010UF K	
C60			CK73GB1H471K	CHIP C 470PF K		C170			CK73FB1E104K	CHIP C 0.10UF K	
C61			CK73GB1H102K	CHIP C 1000PF K		C171,172			CK73GB1H102K	CHIP C 1000PF K	
C62,63			CK73GB1H471K	CHIP C 470PF K		C173			CK73GB1H103K	CHIP C 0.010UF K	
C64,65			CC73GCH1H101J	CHIP C 100PF J		C174			C92-0589-05	CHIP-TAN 47UF 6.3WV	
C66			CK73GB1H102K	CHIP C 1000PF K		C175			CK73FB1E104K	CHIP C 0.10UF K	
C68			CK73GB1H103K	CHIP C 0.010UF K		C186			CK73GB1C104K	CHIP C 0.10UF K	
C69			CK73GB1H102K	CHIP C 1000PF K		C187,188			CK73GB1H102K	CHIP C 1000PF K	
C70			C92-0606-05	CHIP-TAN 4.7UF 10WV		C202-204			CK73GB1H103K	CHIP C 0.010UF K	
C71-73			CK73GB1H103K	CHIP C 0.010UF K		C205			C92-0633-05	CHIP-TAN 22UF 10WV	
C74-76			CC73GCH1H470J	CHIP C 47PF J		C206,207			CC73GCH1H271J	CHIP C 270PF J	
C77			CK73GB1H103K	CHIP C 0.010UF K		C208			C92-0628-05	CHIP-TAN 10UF 10WV	
C78			CK73GB1H152K	CHIP C 1500PF K		C209			C92-0519-05	CHIP-TAN 1.0UF 25WV	
C79			CC73FC1H1751J	CHIP C 750PF J		C210			CC73GCH1H820J	CHIP C 82PF J	
C80			C92-0628-05	CHIP-TAN 10UF 10WV		C211			CK73GB1H102K	CHIP C 1000PF K	
C82			CC73GCH1H100D	CHIP C 10PF D		C212			CC73GCH1H151J	CHIP C 150PF J	
C100			CC73GCH1H070D	CHIP C 7.0PF D		C213			CK73GB1H103K	CHIP C 0.010UF K	
C101			CK73GB1H103K	CHIP C 0.010UF K		C214			CC73GCH1H100D	CHIP C 10PF D	
C102			C92-0001-05	CHIP-C 0.1UF 35WV		C215,216			CK73GB1H103K	CHIP C 0.010UF K	
C103,104			CK73GB1H103K	CHIP C 0.010UF K		C218			CC73GCH1H100D	CHIP C 10PF D	
C105			CK73GB1H102K	CHIP C 1000PF K		C219			CC73GCH1H101J	CHIP C 100PF J	
C106			CK73GB1H471K	CHIP C 470PF K		C220			CK73GB1H103K	CHIP C 0.010UF K	
C107			C92-0606-05	CHIP-TAN 4.7UF 10WV		C221-224			CC73GCH1H271J	CHIP C 270PF J	
C108,109			CK73GB1H102K	CHIP C 1000PF K		C225			CK73GB1H102K	CHIP C 1000PF K	
C110			CK73GB1H103K	CHIP C 0.010UF K		C226			C92-0628-05	CHIP-TAN 10UF 10WV	
C111			C92-0003-05	CHIP-TAN 0.47UF 25WV		C231			CK73GB1H471K	CHIP C 470PF K	
C112			CK73GB1H102K	CHIP C 1000PF K		C232			C92-0004-05	CHIP-TAN 1.0UF 16WV	
C113			CC73GCH1H100D	CHIP C 10PF D		C233			CC73GCH1H180J	CHIP C 18PF J	
C114-116			CK73GB1H103K	CHIP C 0.010UF K		C234			CC73GCH1H390J	CHIP C 39PF J	
C118			CK73GB1H102K	CHIP C 1000PF K		C235			CC73GCH1H180J	CHIP C 18PF J	
C119			CC73GCH1H101J	CHIP C 100PF J		C236			C92-0512-05	CHIP-TAN 1.0UF 16WV	
C120			CK73GB1H102K	CHIP C 1000PF K		C237-239			CK73GB1H102K	CHIP C 1000PF K	
C121			CK73FB1E104K	CHIP C 0.10UF K		C240			C92-0628-05	CHIP-TAN 10UF 10WV	
C123			CK73FB1E104K	CHIP C 0.10UF K		C241			CK73GB1H102K	CHIP C 1000PF K	
C124			C92-0589-05	CHIP-TAN 47UF 6.3WV		C242			CC73GCH1H100D	CHIP C 10PF D	

PARTS LIST

TX UNIT (X56-3040-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C243			CK73GB1H102K	CHIP C 1000PF K		C315			C93-0566-05	CHIP C 33PF J	
C244			C92-0628-05	CHIP-TAN 10UF 10WV		C316			C93-0562-05	CHIP C 15PF J	
C245			CK73GB1H103K	CHIP C 0.010UF K		C317			C92-0729-05	ELECTRO C 330UF 25WV	
C246			CC73GCH1H271J	CHIP C 270PF J		C318			CK73GB1H102K	CHIP C 1000PF K	
C247			C92-0004-05	CHIP-TAN 1.0UF 16WV		C319-322			CK73GB1H471K	CHIP C 470PF K	
C248			CK73GB1H102K	CHIP C 1000PF K		C323-328			CK73GB1H102K	CHIP C 1000PF K	
C249			CC73GCH1H330J	CHIP C 33PF J		C329			CK73GB1H103K	CHIP C 0.010UF K	
C250			CK73GB1H103K	CHIP C 0.010UF K		C330,331			CK73GB1H102K	CHIP C 1000PF K	
C251-253			CK73GB1H102K	CHIP C 1000PF K		C332,333			CK73FB1E104K	CHIP C 0.10UF K	
C254			CC73GCH1H101J	CHIP C 100PF J		C334			C92-0003-05	CHIP-TAN 0.47UF 25WV	
C255,256			CK73GB1H102K	CHIP C 1000PF K		C335			CK73GB1H102K	CHIP C 1000PF K	
C257			CC73GCH1H221J	CHIP C 220PF J		C336,337			C93-0553-05	CHIP C 3.0PF C	
C258,259			CK73GB1H103K	CHIP C 0.010UF K		C338			C93-0555-05	CHIP C 5.0PF C	
C260,261			CC73GCH1H100D	CHIP C 10PF D		C339			CK73GB1H102K	CHIP C 1000PF K	
C262			CK73GB1H103K	CHIP C 0.010UF K		C340			CK73FB1E104K	CHIP C 0.10UF K	
C263			CC73GCH1H220J	CHIP C 22PF J		C341-344			CK73GB1H102K	CHIP C 1000PF K	
C264			CC73GCH1H560J	CHIP C 56PF J		C345			C92-0504-05	CHIP-TAN 0.68UF 20WV	
C265			CK73GB1C104K	CHIP C 0.10UF K		C346			CK73FB1E104K	CHIP C 0.10UF K	
C266,267			CK73GB1E223K	CHIP C 0.022UF K		C348-350			CK73GB1H102K	CHIP C 1000PF K	
C268			C92-0628-05	CHIP-TAN 10UF 10WV		C351			C92-0606-05	CHIP-TAN 4.7UF 10WV	
C269,270			CK73GB1H103K	CHIP C 0.010UF K		C352			CK73GB1H102K	CHIP C 1000PF K	
C271			CK73GB1H471K	CHIP C 470PF K		C353			C93-0603-05	CHIP C 1000PF K	
C272			CC73GCH1H470J	CHIP C 47PF J		C354			CK73GB1H102K	CHIP C 1000PF K	
C273,274			CK73FB1E104K	CHIP C 0.10UF K		C355			CK73FB1E104K	CHIP C 0.10UF K	
C275			CK73GB1H102K	CHIP C 1000PF K		C357			CK73FB1E104K	CHIP C 0.10UF K	
C276			CK73FB1E104K	CHIP C 0.10UF K		C358			CK73GB1H102K	CHIP C 1000PF K	
C277			CC73GCH1H560J	CHIP C 56PF J		C414			C93-0560-05	CHIP C 10PF D	
C278-281			CK73GB1H102K	CHIP C 1000PF K		TC1,2			C05-0393-05	CERAMIC TRIMMER CAP(8P/12)	
C282			CK73GB1H103K	CHIP C 0.010UF K							
C283			CC73GCH1H271J	CHIP C 270PF J		CN1			E04-0409-05	RF COAXIAL RECEPTACLE(SMB)	
C284			CK73GB1H103K	CHIP C 0.010UF K		CN2			E40-5758-05	FLAT CABLE CONNECTOR	
C285			CC73GCH1H330J	CHIP C 33PF J		CN3			E40-5736-05	FLAT CABLE CONNECTOR	
C286			CC73GCH1H151J	CHIP C 150PF J		CN101,102			E04-0409-05	RF COAXIAL RECEPTACLE(SMB)	
C287			CC73GCH1H101J	CHIP C 100PF J		CN103,104			E40-5538-05	PIN ASSY	
C288			CK73GB1H102K	CHIP C 1000PF K		CN301			E04-0408-05	RF COAXIAL RECEPTACLE(SMB)	
C289			CC73GCH1H220J	CHIP C 22PF J		CN302			E40-5758-05	FLAT CABLE CONNECTOR	
C290			CC73GCH1H100D	CHIP C 10PF D		CN304,305			E40-5538-05	PIN ASSY	
C291			CK73GB1H102K	CHIP C 1000PF K		CN306,307			E23-0902-05	TERMINAL	
C292			CK73GB1H103K	CHIP C 0.010UF K		CN308			E04-0408-05	RF COAXIAL RECEPTACLE(SMB)	
C293			CK73GB1H102K	CHIP C 1000PF K		CN502			E40-5783-05	PIN ASSY	
C294			CK73GB1H103K	CHIP C 0.010UF K		J402			J13-0071-05	FUSE HOLDER	
C295			CC73GCH1H221J	CHIP C 220PF J		CF1		*	L72-0976-05	CERAMIC FILTER	
C296,297			CC73GCH1H100D	CHIP C 10PF D		L1,2			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)	
C298			CK73GB1H102K	CHIP C 1000PF K		L4			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)	
C301			C92-0729-05	ELECTRO C 330UF 25WV		L5		*	L34-4601-05	AIR-CORE COIL	
C302,303			CK73GB1H102K	CHIP C 1000PF K		L6		*	L34-4600-05	AIR-CORE COIL	
C304			CK73GB1H471K	CHIP C 470PF K		L7			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)	
C305			CK73GB1H103K	CHIP C 0.010UF K		L11			L40-1081-36	SMALL FIXED INDUCTOR(100NH/160	
C306			CC73GCH1H0R5B	CHIP C 0.5PF B		L13			L40-1071-36	SMALL FIXED INDUCTOR(10NH/8)	
C307			C93-0561-05	CHIP C 12PF J		L14			L40-4771-36	SMALL FIXED INDUCTOR(47NH/1608	
C308			C92-0729-05	ELECTRO C 330UF 25WV		L15			L40-1085-54	SMALL FIXED INDUCTOR(100NH/201	
C309			CK73GB1H103K	CHIP C 0.010UF K		L16			L92-0140-05	FERRITE CHIP	
C310			CK73FB1E104K	CHIP C 0.10UF K		L17			L92-0138-05	FERRITE CHIP	
C311			C92-0040-05	CHIP-ELE 47UF 16WV		L101			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)	
C312			C93-0566-05	CHIP C 33PF J		L102			L40-4785-34	SMALL FIXED INDUCTOR(470NH/8)	
C313,314			CK73GB1H102K	CHIP C 1000PF K		L103-105			L40-1015-34	SMALL FIXED INDUCTOR(1000NH/8)	

PARTS LIST

TX UNIT (X56-3040-10)


Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
L106			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)		R41			RK73GB1J152J	CHIP R 1.5K J 1/16W	
L201			L40-4785-34	SMALL FIXED INDUCTOR(470NH/8)		R42			RK73GB1J470J	CHIP R 47 J 1/16W	
L203			L40-1595-34	SMALL FIXED INDUCTOR(1.5UH/8)		R43			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L204			L40-1015-34	SMALL FIXED INDUCTOR(100UH/8)		R44			RK73GB1J393J	CHIP R 39K J 1/16W	
L205,206			L40-4785-34	SMALL FIXED INDUCTOR(470NH/8)		R45			R92-1252-05	CHIP R 0 OHM	
L207			L40-1095-34	SMALL FIXED INDUCTOR(1UH/8)		R46			R92-0699-05	CHIP R 10 J 1/2W	
L209,210			L40-1015-34	SMALL FIXED INDUCTOR(100UH/8)		R47			R92-1252-05	CHIP R 0 OHM	
L240,241			L40-1015-34	SMALL FIXED INDUCTOR(100UH/8)		R48			RK73GB1J103J	CHIP R 10K J 1/16W	
L242,243			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)		R49			RK73GB1J123J	CHIP R 12K J 1/16W	
L244,245			L40-4771-36	SMALL FIXED INDUCTOR(47NH/1608		R50			RK73GB1J471J	CHIP R 470 J 1/16W	
L246			L40-1005-34	SMALL FIXED INDUCTOR(10UH/8)		R51,52			RK73GB1J331J	CHIP R 330 J 1/16W	
L247			L40-1015-34	SMALL FIXED INDUCTOR(100UH/8)		R54			R92-1252-05	CHIP R 0 OHM	
L248			L40-4785-34	SMALL FIXED INDUCTOR(470NH/8)		R55,56			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L301-303			L34-4520-05	AIR-CORE COIL		R57			RK73GB1J471J	CHIP R 470 J 1/16W	
L304			L79-0558-05	FILTER		R58,59			RK73GB1J683J	CHIP R 68K J 1/16W	
L305			L34-4523-05	AIR-CORE COIL		R60			RK73GB1J224J	CHIP R 220K J 1/16W	
L306			L92-0179-05	FERRITE CHIP		R61			RK73GB1J471J	CHIP R 470 J 1/16W	
X101			L77-1735-05	TCXO (20MHZ/5P)		R62			RK73GB1J104J	CHIP R 100K J 1/16W	
X201			L77-1748-05	CRYSTAL RESONATOR		R63			RK73GB1J101J	CHIP R 100 J 1/16W	
XF210,211			L71-0529-05	MCF (20MHZ 2K/3P)		R64			RK73GB1J471J	CHIP R 470 J 1/16W	
R1,2			RK73GB1J221J	CHIP R 220 J 1/16W		R65			RK73GB1J474J	CHIP R 470K J 1/16W	
R3,4			RK73GB1J473J	CHIP R 47K J 1/16W		R67			RK73GB1J124J	CHIP R 120K J 1/16W	
R5,6			RK73GB1J104J	CHIP R 100K J 1/16W		R68			RK73GB1J224J	CHIP R 220K J 1/16W	
R7			RK73GB1J333J	CHIP R 33K J 1/16W		R69,70			RK73GB1J473J	CHIP R 47K J 1/16W	
R8			RK73GB1J273J	CHIP R 27K J 1/16W		R71			RK73GB1J474J	CHIP R 470K J 1/16W	
R9			RK73GB1J101J	CHIP R 100 J 1/16W		R72			RK73GB1J101J	CHIP R 100 J 1/16W	
R10,11			R92-1252-05	0 OHM		R73			RK73GB1J104J	CHIP R 100K J 1/16W	
R12			RK73GB1J101J	CHIP R 100 J 1/16W		R74			RK73GB1J221J	CHIP R 220 J 1/16W	
R13			RK73GB1J471J	CHIP R 470 J 1/16W		R77			RK73GB1J471J	CHIP R 470 J 1/16W	
R14			RK73GB1J103J	CHIP R 10K J 1/16W		R78,79			RK73GB1J331J	CHIP R 330 J 1/16W	
R15			RK73GB1J471J	CHIP R 470 J 1/16W		R84			R92-1252-05	CHIP R 0 OHM	
R16			RK73GB1J103J	CHIP R 10K J 1/16W		R85-87			RK73GB1J101J	CHIP R 100 J 1/16W	
R17			RK73GB1J473J	CHIP R 47K J 1/16W		R88			RK73GB1J183J	CHIP R 18K J 1/16W	
R18			RK73GB1J103J	CHIP R 10K J 1/16W		R89			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R19			RK73GB1J470J	CHIP R 47 J 1/16W		R100			RK73GB1J103J	CHIP R 10K J 1/16W	
R20			RK73GB1J103J	CHIP R 10K J 1/16W		R101			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R21			RK73GB1J471J	CHIP R 470 J 1/16W		R102			RK73GB1J473J	CHIP R 47K J 1/16W	
R22			RK73GB1J103J	CHIP R 10K J 1/16W		R105,106			RK73GB1J101J	CHIP R 100 J 1/16W	
R23			RK73GB1J183J	CHIP R 18K J 1/16W		R107			RK73GB1J471J	CHIP R 470 J 1/16W	
R24			RK73GB1J101J	CHIP R 100 J 1/16W		R108			RK73GB1J183J	CHIP R 18K J 1/16W	
R25			RK73GB1J472J	CHIP R 4.7K J 1/16W		R109			R92-0670-05	CHIP R 0 OHM	
R26			RK73GB1J220J	CHIP R 22 J 1/16W		R112			RK73GB1J183J	CHIP R 18K J 1/16W	
R27			RK73GB1J101J	CHIP R 100 J 1/16W		R113			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R28			RK73GB1J103J	CHIP R 10K J 1/16W		R114			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R29			RK73GB1J183J	CHIP R 18K J 1/16W		R115			RK73GB1J101J	CHIP R 100 J 1/16W	
R30			RK73GB1J103J	CHIP R 10K J 1/16W		R117			RK73GB1J101J	CHIP R 100 J 1/16W	
R31			RK73GB1J101J	CHIP R 100 J 1/16W		R118			RK73GB1J183J	CHIP R 18K J 1/16W	
R32			RK73GB1J221J	CHIP R 220 J 1/16W		R119			RK73GB1J103J	CHIP R 10K J 1/16W	
R33			RK73GB1J103J	CHIP R 10K J 1/16W		R120			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R34			RK73GB1J222J	CHIP R 2.2K J 1/16W		R121			R92-1252-05	CHIP R 0 OHM	
R35			RK73GB1J182J	CHIP R 1.8K J 1/16W		R122			RK73GB1J101J	CHIP R 100 J 1/16W	
R36			RK73GB1J472J	CHIP R 4.7K J 1/16W		R123			RK73GB1J103J	CHIP R 10K J 1/16W	
R37			RK73GB1J153J	CHIP R 15K J 1/16W		R124			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R38			RK73GB1J183J	CHIP R 18K J 1/16W		R129			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R39			RK73GB1J331J	CHIP R 330 J 1/16W		R130			RK73GB1J331J	CHIP R 330 J 1/16W	
R40			RK73GB1J101J	CHIP R 100 J 1/16W		R131			RK73GB1J102J	CHIP R 1.0K J 1/16W	

PARTS LIST

TKR-740


PARTS LIST

TX UNIT (X56-304C)

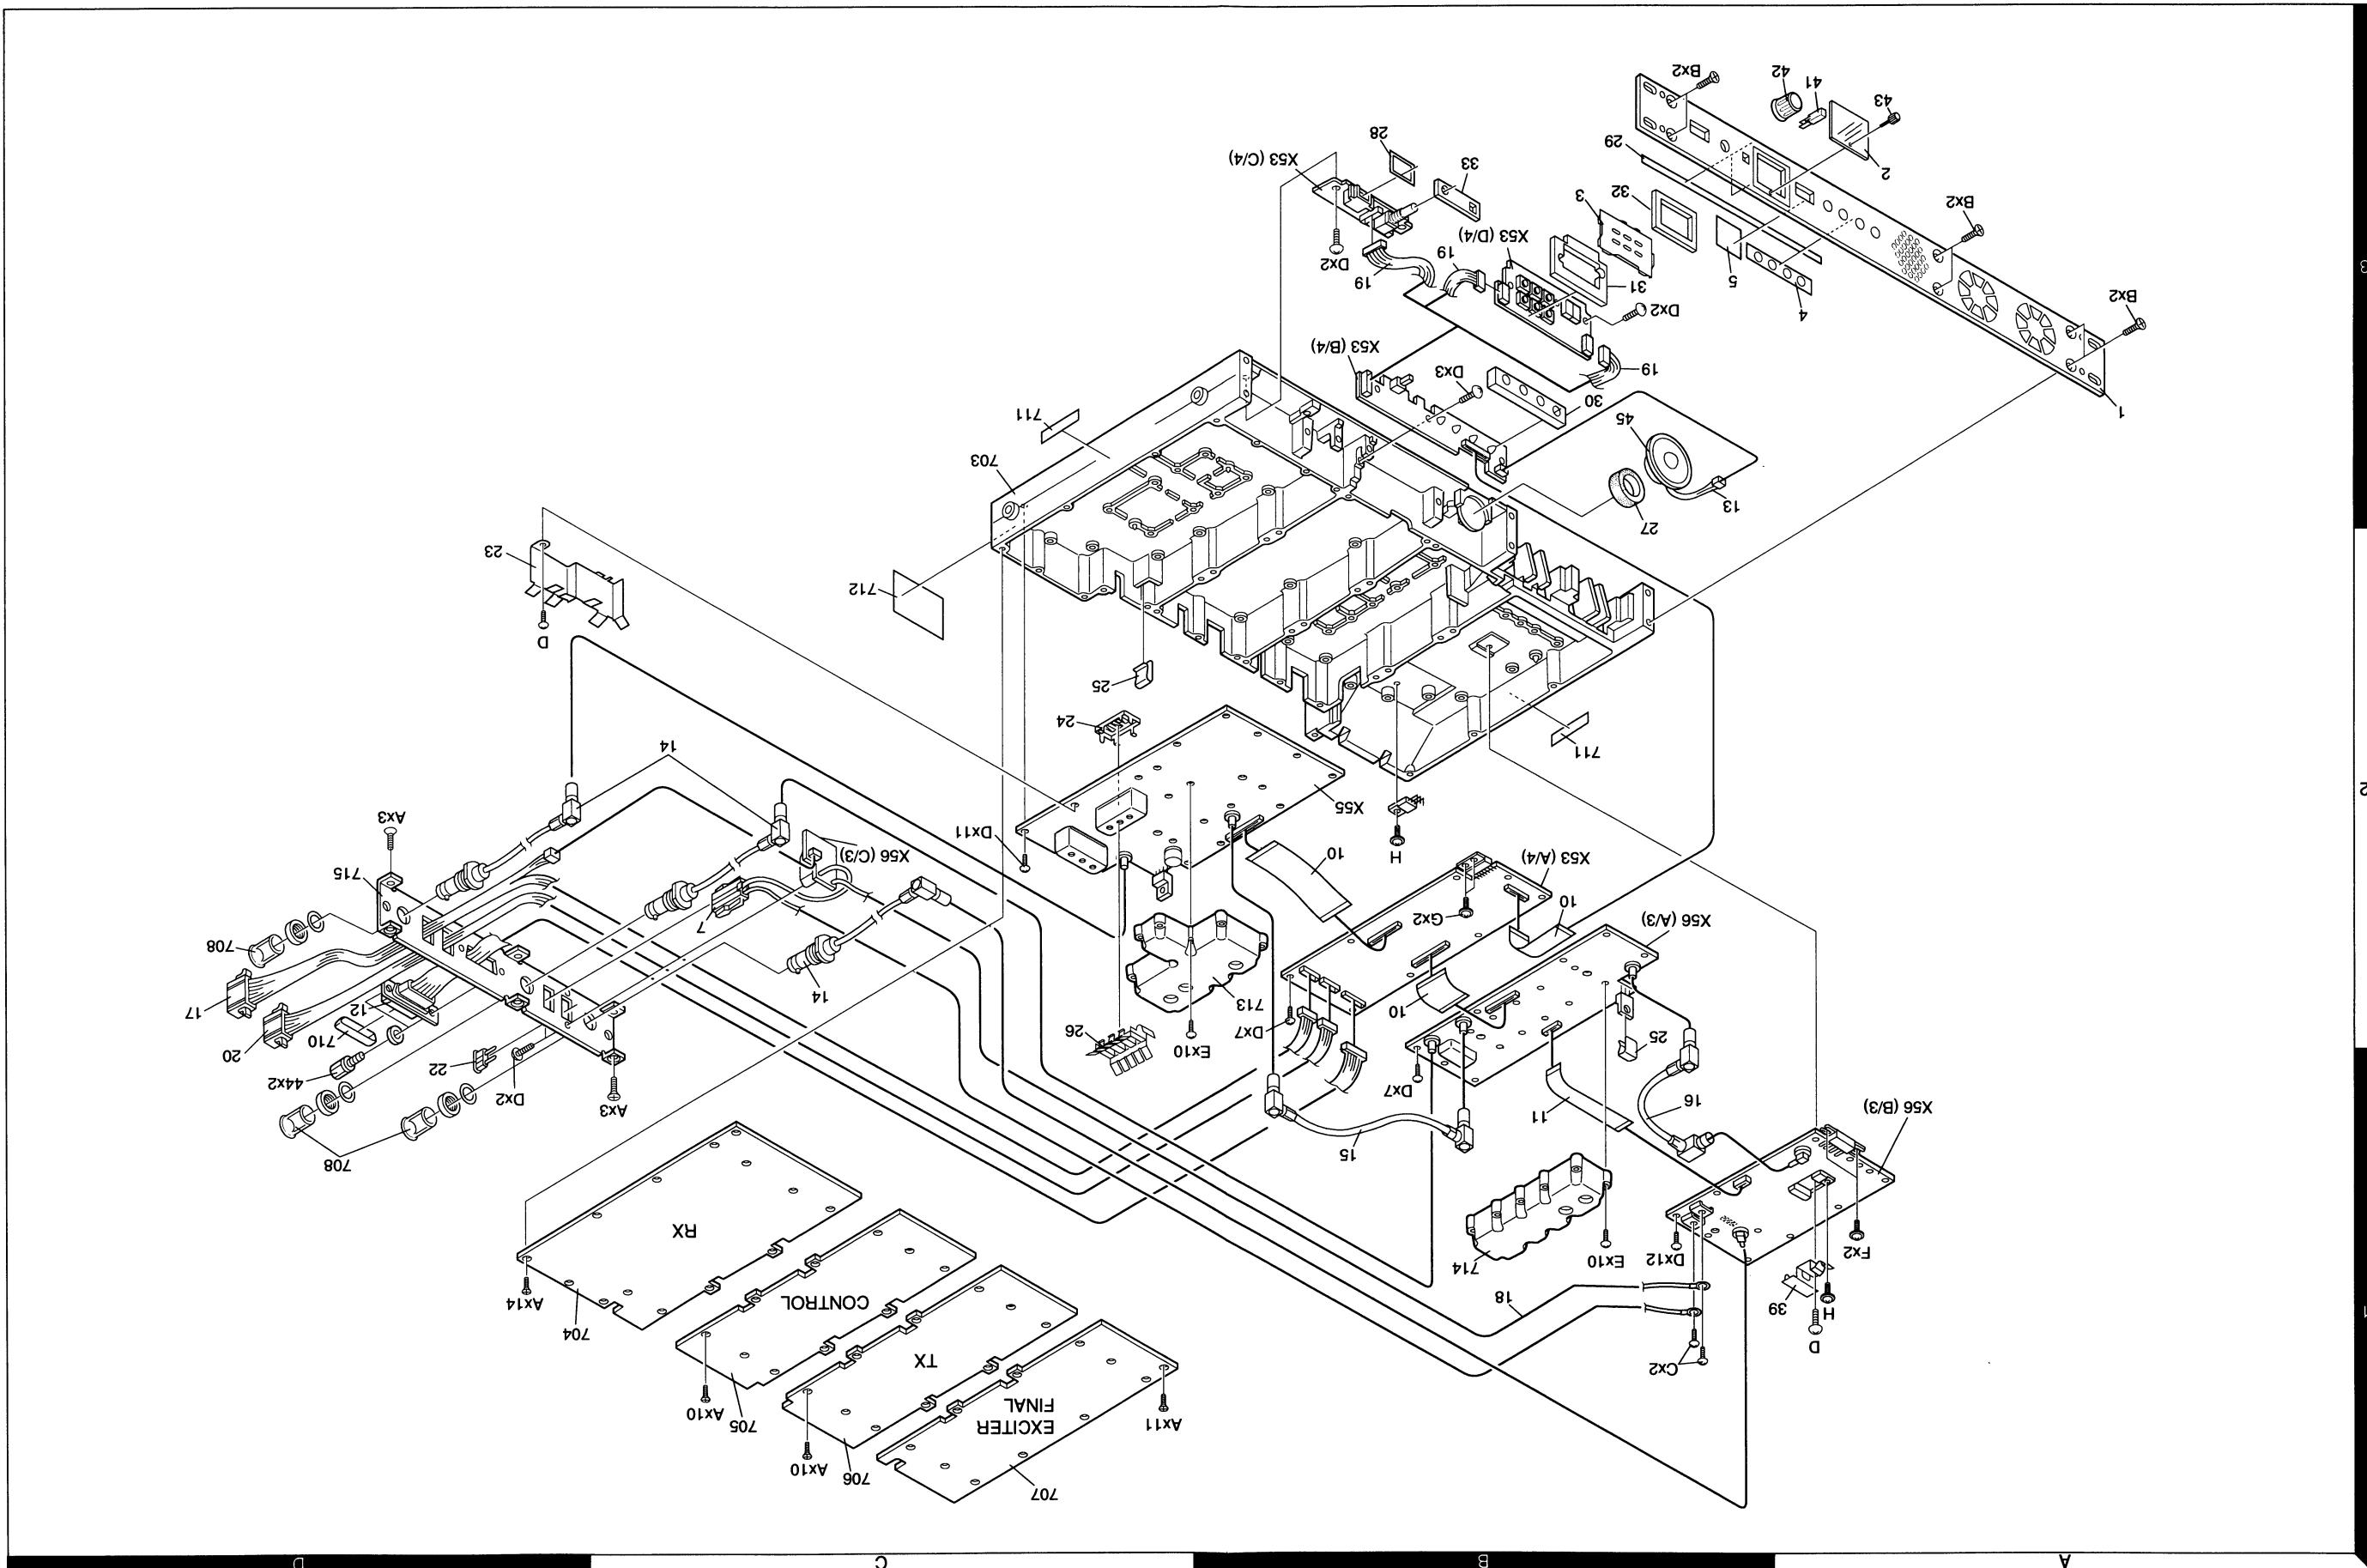

TKR-740 **EXPLODED VIEW**

PACKING

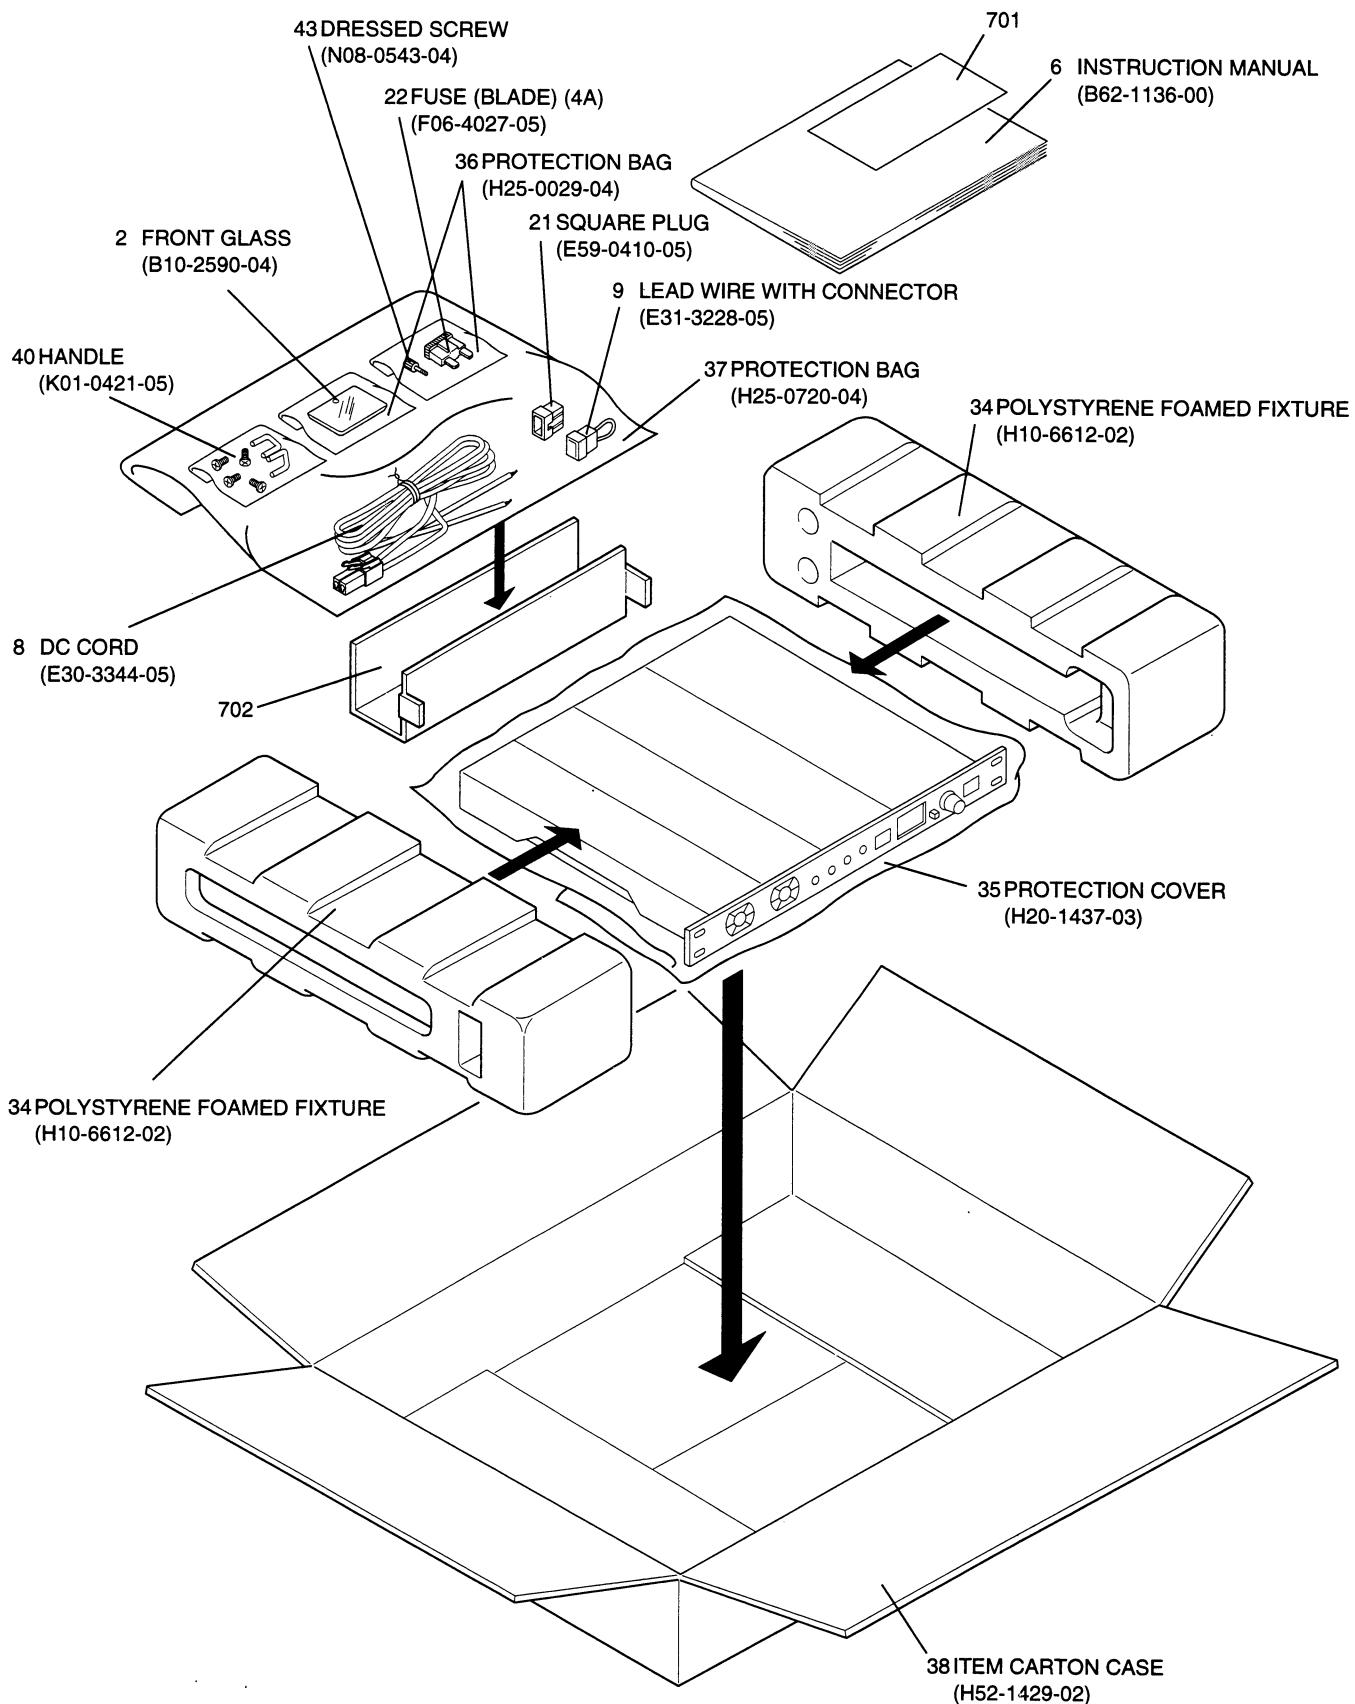

TKR-740

TERMINAL FUNCTION

CONTROL UNIT (X53-3880-10)

CN1

Terminal No.	Terminal name	Terminal function	I/O
1	RA	RX Audio (filtered signal)	I
2	RXG	RX Audio ground	-
3	DET	Detector audio	I
4	DEG	Detector audio ground	-
5	SC	Noise squelch control	I
6	RSSI	RX signal strength indicator	I
7	CK	Common clock	O
8	DT	Common data	O
9	ESR	Shift register strobe	O
10	EVR	Electronic volume strobe	O
11	SCL	RX EEPROM serial clock	O
12	SDA	RX EEPROM serial data	I/O
13	DP	PLL data signal	O
14	CP	PLL clock signal	O
15	EPR	RX main PLL strobe signal	O
16	LDR	RX PLL lock detector	I
17	GND	Ground	-
18	CVR	RX main PLL lock voltage	I
19	NC	No connection	-
20	NC	No connection	-
21	B	Power supply (Vcc)	O
22	B	Power supply (Vcc)	O
23	B	Power supply (Vcc)	O
24	NC	No connection	-
25	NC	No connection	-
26	NC	No connection	-

CN3

Terminal No.	Terminal name	Terminal function	I/O
1	SPI	Local speaker input	O
2	SPG	Local speaker ground	-
3	VLO	AF volume control output	I
4	VLI	AF volume control input	O
5	GND	Ground	-
6	BLT	Mic connector J700 (1pin)	I
7	8C	8V constant voltage	O
8	HOK	Hook-switch	I
9	PTT	Press-to-talk-switch	I
10	EXR	Exit reference indicator	O
11	SW1	Programable switch S705	I
12	SW2	Programable switch S704	I
13	B	Power supply (Vcc)	O
14	B	Power supply (Vcc)	O
15	SW3	Programable switch S703	I
16	SW4	Programable switch S702	I
17	TEST	Test switch	I
18	SW5	Programable switch S701	I
19	SW6	Programable switch S700	I
0	EN7	Shift register enable signal	O
21	MDAT	Mic connector J700 (8pin)	I
22	DT	Serial data for IC703	O
23	CK	Common serial clock	O
24	GND	Ground	-
25	MI	Microphone signal	I
26	MIG	Microphone ground	-

CN2

Terminal No.	Terminal name	Terminal function	I/O
1	MOD	Modulation signal	O
2	TO	Signalling signal	O
3	MIG	Microphone ground	-
4	EVT	TX electronic volume enable signal	O
5	EST	TX shift register enable signal	O
6	DT	Data signal for IC3 & IC4	O
7	CK	Clock signal for IC3 & IC4	O
8	NC	No connection	-
9	NC	No connection	-
10	SDA	RX EEPROM serial data	O
11	SCL	RX EEPROM serial clock	I/O
12	LDT	TX main PLL lock detector	I
13	PRT	High temperature detect	I
14	CP	TX both PLL clock signal	O
15	NC	No connection	-
16	DP	TX both PLL data signal	O
17	EXR	Exit reference detector	I
18	CVT	TX main PLL lock voltage	I
19	REV	Reverse TX power detector	I
20	FWD	Forward TX power detector	I
21	GND	Ground	-
22	PAG	Digital pager signal	O
23	B	Power supply (Vcc)	I
24	B	Power supply (Vcc)	I
25	B	Power supply (Vcc)	I
26	PAB	Power supply for AF PA IC	I

TERMINAL FUNCTION

CONTROL UNIT (X53-3880-10)

CN4

Terminal No.	Terminal name	Terminal function	I/O
1	SPM	Speaker mute signal	I
2	AUX06	Auxiliary output 6	O
3	RXG	RX signal ground	-
4	AUX05	Auxiliary output 5	O
5	RA	RX audio (voice)	O
6	AUX04	Auxiliary output 4	O
7	RD	RX data (voice & data)	O
8	AUX03	Auxiliary output 3	O
9	TA	TX audio (voice)	I
10	AUX02	Auxiliary output 2	O
11	TD	TX data (data or signalling)	I
12	AUX01	Auxiliary output 1	O
13	DG	Control line ground	-
14	TXG	TX signal ground	-
15	AUX13	Auxiliary input 3	I
16	NC	No connection	-
17	AUX12	Auxiliary input 2	I
18	SC	SQ control	O
19	AUX11	Auxiliary input 1	I
20	ExPTT	External press-to-talk switch	I
21	TXD	RS-232C output signal (for FPU)	O
22	ExMON	External monitor switch	I
23	RXD	RS-232C input signal (for FPU)	I
24	NC	No connection	-
25	NC	No connection	-
26	NC	No connection	-
27	NC	No connection	-
28	NC	No connection	-
29	NC	No connection	-
30	NC	No connection	-

CN5

Terminal No.	Terminal name	Terminal function	I/O
1	B	Power supply (Vcc)	O
2	FWD	TX forward power detect signal	O
3	EXR	External reference detect signal	O
4	CVT	TX main PLL lock voltage signal	O
5	CVR	RX main PLL lock voltage signal	O
6	RD	RX data (data & voice)	O
7	RSSI	RX signal strength indicator signal	O
8	SPO	External Speaker AF	O
9	SPO	External Speaker AF	O
10	SPI	Internal Speaker AF input	I
11	GND	Ground	-
12	GND	Ground	-
13	SPG	External Speaker ground	-
14	SPG	External Speaker ground	-

CN6

Terminal No.	Terminal name	Terminal function	I/O
1	RRA	Remote RX signal (voice)	O
2	RTA	Remote TX signal (voice)	I
3	RPTT	Remote Press-to-talk switch	I
4	ExMON	External monitor switch	I
5	GND	Ground	-
6	I/O1	Programmable I/O 1	I/O
7	I/O2	Programmable I/O 2	I/O
8	I/O3	Programmable I/O 3	I/O
9	I/O4	Programmable I/O 4	I/O
10	I/O5	Programmable I/O 5	I/O
11	I/O6	Programmable I/O 6	I/O
12	I/O7	Programmable I/O 7	I/O

CN700

Terminal No.	Terminal name	Terminal function	I/O
1	B	Power supply (Vcc)	I
2	SW1	S705 output	O
3	SW2	S704 output	O
4	SW3	S703 output	O
5	SW4	S702 output	O
6	SW5	S701 output	O
7	SW6	S700 output	O

CN701

Terminal No.	Terminal name	Terminal function	I/O
1	5A2	5V constant voltage A	I
2	5B2	5V constant voltage B	I
3	EN7	Enable signal for IC700, 701, 702	I
4	CK	Common Clock for IC700, 701, 702	I
5	DS	Serial data for IC702	I
6	GND	Ground	-

TERMINAL FUNCTION

CONTROL UNIT (X53-3880-10)

CN702

Terminal No.	Terminal name	Terminal function	I/O
1	SPI	Local speaker input	I
2	SPG	Local speaker ground	-
3	VLO	AF volume control output	O
4	VLI	AF volume control input	I
5	GND	Ground	-
6	BLT	Mic connector J700 (1pin)	O
7	8C	8V constant voltage	I
8	HOK	Hook-switch	O
9	PTT	Press-to-talk-switch	O
10	EXR	External reference indicator	I
11	SW1	Programable switch S705	O
12	SW2	Programable switch S704	O
13	B	Power supply (Vcc)	I
14	B	Power supply (Vcc)	I
15	SW3	Programable switch S703	O
16	SW4	Programable switch S702	O
17	TEST	Test switch	O
18	SW5	Programable switch S701	O
19	SW6	Programable switch S700	O
20	EN7	Shift register enable signal	I
21	MDAT	Mic connector J700 (8pin)	O
22	DT	Serial data for IC703	I
23	CK	Common serial clock	I
24	GND	Ground	-
25	MI	Microphone signal	O
26	MIG	Microphone ground	-

CN703

Terminal No.	Terminal name	Terminal function	I/O
1	SPG	Internal Speaker ground	-
2	SP	Internal Speaker AF output	O

CN705

Terminal No.	Terminal name	Terminal function	I/O
1	VLO	AF signal for VR701	I
2	VLI	AF signal from VR701	O
3	GND	Ground	-
4	BLT	Mic connector J700 (pin1)	-
5	B	Power supply (Vcc)	I
6	GND	Ground	-
7	PTT	Press-to-talk switch	O
8	MIG	Microphone ground	-
9	MIC	Microphone signal	O
10	HOK	Hook signal	O
11	MDAT	Mic connector J700 (pin8)	-
12	NC	No connection	-
13	NC	No connection	-
14	NC	No connection	-

CN706

Terminal No.	Terminal name	Terminal function	I/O
1	NC	No connection	-
2	SW6	Switch S700 signal	I
3	NC	No connection	-
4	SW5	Switch S701 signal	I
5	NC	No connection	-
6	SW4	Switch S702 signal	I
7	MDAT	Mic connector J700 (pin8)	-
8	SW3	Switch S703 signal	I
9	HOK	Hook signal	I
10	SW2	Switch S704 signal	I
11	MIC	Local mic signal	I
12	SW1	Switch S705 signal	I
13	MIG	Local mic ground	-
14	B	Power supply (Vcc)	O
15	PTT	Press to talk switch	I
16	5A2	5V constant voltage A	O
17	GND	Ground	-
18	5B2	5V constant voltage B	O
19	B	Power supply (Vcc)	O
20	EN7	Shift register enable	O
21	BLT	Mic connector J700 (pin1)	-
22	CK	Common clock	O
23	GND	Ground	-
24	DS	Serial data from IC703	O
25	VLI	AF signal for VR701	I
26	GND	Ground	-
27	VLO	AF signal from VR701	O
28	NC	No connection	-
29	NC	No connection	-
30	NC	No connection	-

TERMINAL FUNCTION

TX UNIT (X56-3040-10)

CN1

Terminal No.	Terminal name	Terminal function	I/O
-	DRIV OUT	Drive signal output (coaxial)	O

CN2

Terminal No.	Terminal name	Terminal function	I/O
1	PAB	AFPA power supply (Vcc)	I
2	B	Power supply (Vcc)	I
3	B	Power supply (Vcc)	I
4	B	Power supply (Vcc)	I
5	H/L	High power/Low power control	O
6	FWD	Forward power detect voltage	I
7	REV	Reflected power detect voltage	I
8	PC	TX power control signal	O
9	PRT	High temperature detector signal	I
10	GND	Ground	-
11	8T	TX 8V constant voltage	O
12	AUX	Auxiliary	-

CN3

Terminal No.	Terminal name	Terminal function	I/O
1	MOD	Modulation signal	I
2	TO	Signalling signal	I
3	MIG	Microphone ground	-
4	EVT	TX electronic volume enable signal	I
5	EST	TX shift register enable signal	I
6	DT	Data signal for IC3 & IC4	I
7	CK	Clock signal for IC3 & IC4	I
8	NC	No connection	-
9	NC	No connection	-
10	SDA	RX EEPROM serial data	I
11	SCL	RX EEPROM serial clock	I/O
12	LDT	TX main PLL lock detector	O
13	PRT	High temperature detect	O
14	CP	TX both PLL clock signal	I
15	NC	No connection	-
16	DP	TX both PLL data signal	I
17	EXR	External reference detector	O
18	CVT	TX main PLL lock voltage	O
19	REV	Reverse TX power detector	O
20	FWD	Forward TX power detector	O
21	GND	Ground	-
22	PAG	Digital pager signal	I
23	B	Power supply (Vcc)	O
24	B	Power supply (Vcc)	O
25	B	Power supply (Vcc)	O
26	PAB	Power supply for AF PA IC	O

CN101

Terminal No.	Terminal name	Terminal function	I/O
-	EXT REF	External reference signal input (coaxial)	I

CN102

Terminal No.	Terminal name	Terminal function	I/O
-	REF OUT	RX reference signal output (coaxial)	O

CN103

Terminal No.	Terminal name	Terminal function	I/O
1	GND	Ground	-
2	FB	Fused +B (for cooling FAN)	O

CN104

Terminal No.	Terminal name	Terminal function	I/O
1	GND	Ground	-
2	FB	Fused +B (for cooling FAN)	O

CN301

Terminal No.	Terminal name	Terminal function	I/O
-	DRIV IN	Drive signal input (coaxial)	I

CN302

Terminal No.	Terminal name	Terminal function	I/O
1	PAB	AFPA power supply (Vcc)	O
2	B	Power supply (Vcc)	O
3	B	Power supply (Vcc)	O
4	B	Power supply (Vcc)	O
5	H/L	High power/Low power control	I
6	FWD	Forward power detect voltage	O
7	REV	Reflected power detect voltage	O
8	PC	TX power control signal	I
9	PRT	High temperature detector signal	O
10	GND	Ground	-
11	8T	TX 8V constant voltage	I
12	AUX	Auxiliary	-

CN304

Terminal No.	Terminal name	Terminal function	I/O
1	GND	Ground	-
2	FB	Fused +B (for cooling FAN)	O

CN305

Terminal No.	Terminal name	Terminal function	I/O
1	GND	Ground	-
2	FB	Fused +B (for cooling FAN)	O

CN306

Terminal No.	Terminal name	Terminal function	I/O
-	+B	Power supply input (Vcc)	I

TKR-740

TERMINAL FUNCTION

TX UNIT (X56-3040-10)

CN307

Terminal No.	Terminal name	Terminal function	I/O
-	GND	Power supply ground	-

CN308

Terminal No.	Terminal name	Terminal function	I/O
-	RF OUT	TX power output (coaxial)	I

CN502

Terminal No.	Terminal name	Terminal function	I/O
1	B	Fused +B (for external equipment)	O
2	B	Fused +B (for external equipment)	O
3	NC	No connection	-

RX UNIT (X55-3050-XX)

CN1

Terminal No.	Terminal name	Terminal function	I/O
-	RX IN	Receive signal input (coaxial)	I

CN2

Terminal No.	Terminal name	Terminal function	I/O
-	-	Use for RX helical BPF tuning	O

CN3

Terminal No.	Terminal name	Terminal function	I/O
1	IN	Use for RX MCF tuning	I
2	GND	Use for RX MCF tuning	-

CN4

Terminal No.	Terminal name	Terminal function	I/O
1	OUT	Use for wide band MCF tuning	O
2	GND	Use for wide band MCF tuning	-

CN5

Terminal No.	Terminal name	Terminal function	I/O
1	OUT	Use for narrow band MCF tuning	O
2	GND	Use for narrow band MCF tuning	-

CN6

Terminal No.	Terminal name	Terminal function	I/O
1	RA	RX Audio (filtered signal)	O
2	RXG	RX Audio ground	-
3	DET	Detector audio	O
4	DEG	Detector audio ground	-
5	SC	Noise squelch control	O
6	RSSI	RX signal strength indicator	O
7	CK	Common clock	I
8	DT	Common data	I
9	ESR	Shift register strobe	I
10	EVR	Electronic volume strobe	I
11	SCL	RX EEPROM serial clock	I/O
12	SDA	RX EEPROM serial data	I
13	DP	PLL data signal	I
14	CP	PLL clock signal	I
15	EPR	RX main PLL strobe signal	I
16	LDR	RX PLL lock detector	O
17	GND	Ground	-
18	CVR	RX main PLL lock voltage	O
19	NC	No connection	-
20	NC	No connection	-
21	B	Power supply (Vcc)	I
22	B	Power supply (Vcc)	I
23	B	Power supply (Vcc)	I
24	NC	No connection	-
25	NC	No connection	-
26	NC	No connection	-

CN7

Terminal No.	Terminal name	Terminal function	I/O
-	REF IN	Reference signal input (coaxial)	I


ADJUSTMENT

Test Equipment Required for Alignment


No. Test Equipment	Major Specifications	
1. Standard Signal Generator (SSG)	Frequency Range Modulation Output	136 to 174MHz. Frequency modulation and external modulation. 0.1µV to greater than 1mV.
2. Power Meter	Input Impedance Operation Frequency Measurement Capability	50Ω. 136 to 174MHz or more. Vicinity of 50W.
3. Deviation Meter	Frequency Range	136 to 174MHz.
4. Digital Volt Meter	Measuring Range Accuracy	1 to 20V DC. High input impedance for minimum circuit loading.
5. Oscilloscope		DC through 30MHz.
6. High Sensitivity Frequency Counter	Frequency Range Frequency Stability	10Hz to 600MHz. 0.2ppm or less.
7. Ammeter		5A or more.
8. AF Volt Meter (AF VTVM)	Frequency Range Voltage Range	50Hz to 10kHz. 3mV to 3V.
9. Audio Generator(AG)	Frequency Range Output	50Hz to 5kHz. 0 to 1V.
10. Distortion Meter	Capability Input Level	3% or less at 1kHz. 50mV to 10Vrms.
11. Voltmeter	Measuring Range Input Impedance	10 to 1.5V DC or less. 50kΩ/V or greater.
12. 4Ω Dummy Load		Approx. 4Ω, 5W

The Following Parts are Required for Adjustment

- Test cable for local microphone

MIC connector
front PANEL view

- The following test cables are recommended

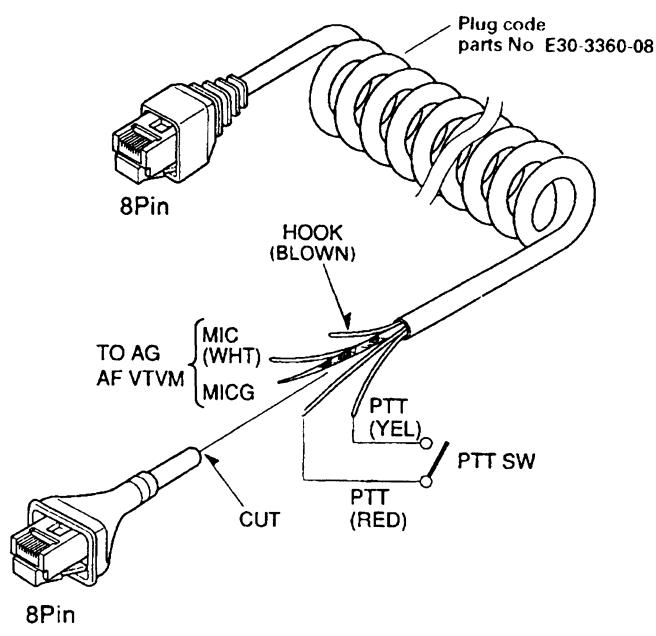

Test cable for Microphone input.


No.	Terminal name & Description
1	NC
2	+B
3	GND
4	PTT/TXD1(PC serial data from radio)
5	MIC G
6	MIC
7	HOOK/RXD1(PC serial data to radio)
8	NC

TKR-740


ADJUSTMENT

Adjustment Location

- Top view

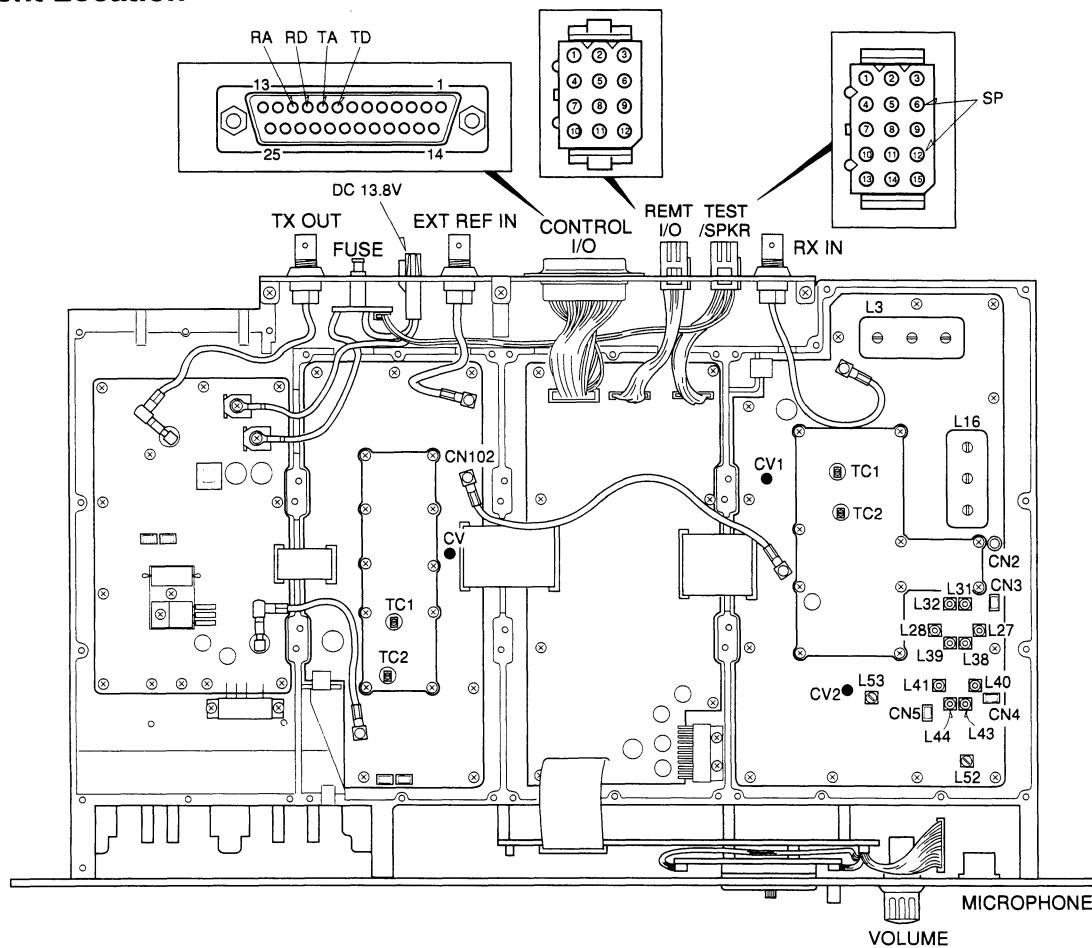

Section Arrangement(Top view)

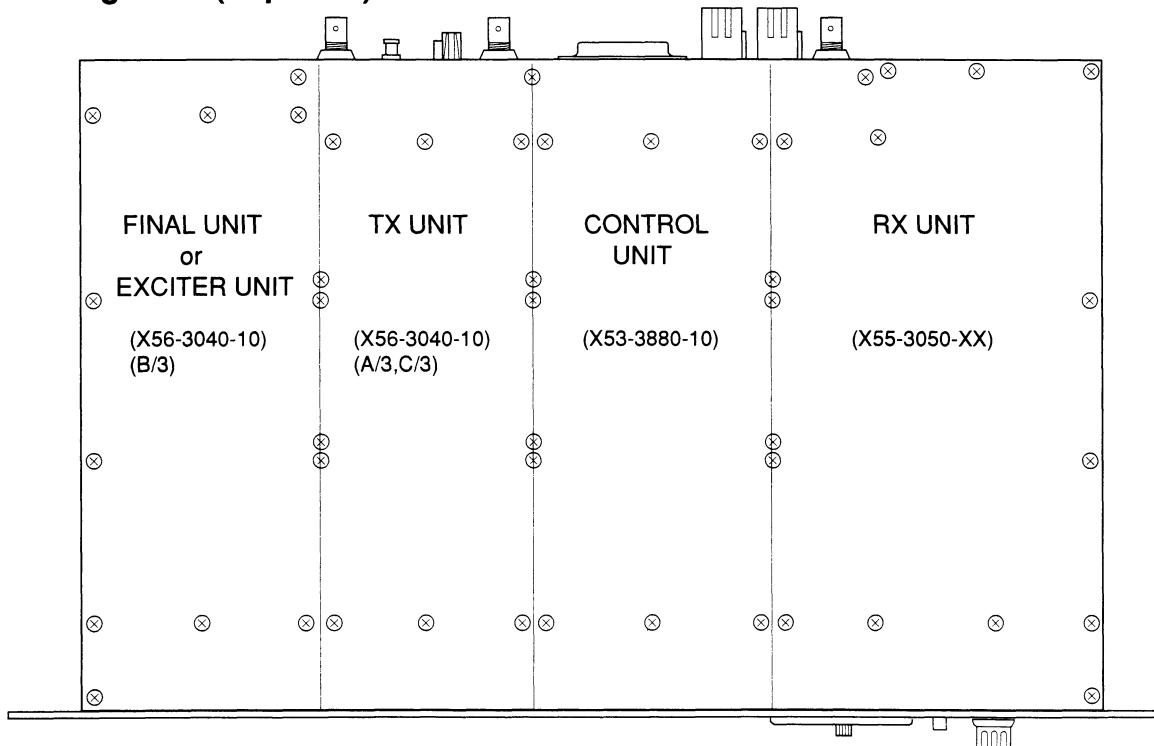

ADJUSTMENT

TEST FREQUENCY LIST

TKR-740 K

* Factory use CH1 to CH16

CH	RX Frequency	TX Frequency	Beat Shift	W/N	Power H/L	VCO	NOTE
1	146.1000	136.0000	No	Wide	H	A Low	VCO A Low
2	150.1000	145.5000	No	Wide	H	A Center	VCO A Center
3	153.9000	154.9500	No	Wide	H	A High	VCO A High
4	154.1000	155.0000	No	Wide	H	B Low	VCO B Low
5	158.1000	164.5000	No	Wide	H	B Center	VCO B Center
6	161.9000	174.0000	No	Wide	H	B High	VCO B High
7	146.1000	136.0000	No	Narrow	L	A Low	VCO A Low
8	150.1000	145.5000	No	Narrow	L	A Center	VCO A Center
9	153.9000	154.9500	No	Narrow	L	A High	VCO A High
10	154.1000	155.0000	No	Narrow	L	B Low	VCO B Low
11	158.1000	164.5000	No	Narrow	L	B Center	VCO B Center
12	161.9000	174.0000	No	Narrow	L	B High	VCO B High
13	150.1000	145.5000	Yes	Wide	H	A Center	For production Beat VCO A Center
14	158.1000	164.5000	Yes	Wide	H	B Center	For production Beat VCO B Center
15	152.5000	155.5000	No	Wide	H	A(Hi)/B(Low)	For production Center TX/RX
16	155.5000	152.5000	No	Wide	H	B(Low)/A(Hi)	For production Center TX/RX
17	152.4000	152.4000	No	Wide	H	A High	Helical (Center) Low edge
18	155.6000	155.6000	No	Wide	H	B Low	Helical (Center) High edge
19	152.4000	152.4000	No	Narrow	L	A High	Helical (Center) Low edge
20	155.6000	155.6000	No	Narrow	L	B Low	Helical (Center) High edge
21	147.6000	147.6000	No	Wide	H	A Low	Helical (Low) High edge
22	147.6000	147.6000	No	Narrow	L	A Low	Helical (Low) High edge
23	160.4000	160.4000	No	Wide	H	B High	Helical (Hi) Low edge
24	160.4000	160.4000	No	Narrow	L	B High	Helical (Hi) Low edge
25	146.1000	136.0000	No	Wide	H	A Low	In band Low edge
26	154.1000	155.0000	No	Wide	H	B Low	In band Center
27	161.9000	174.0000	No	Wide	H	B High	In band High edge
28	153.9750	153.3750	No	Wide	H	B(Low)/A(Hi)	Center LTR+KSI Repeater
29	153.9750	153.3750	No	Narrow	L	B(Low)/A(Hi)	Center LTR+KSI Repeater
30	154.5500	154.5500	No	Wide	H	B Low	For reserve and TX/RX
31	150.1000	158.1000	No	Narrow	L	A(Center)/B(Center)	For reserve and TX/RX
32	158.1000	150.1000	No	Narrow	L	B(Center)/A(Center)	For reserve and TX/RX

TKR-740

ADJUSTMENT

TKR-740 K2

* Factory use CH1 to CH16

CH	RX Frequency	TX Frequency	Beat Shift	W/N	Power H/L	VCO	NOTE
1	158.1000	136.0000	No	Wide	H	A Low	VCO A Low
2	162.1000	145.5000	No	Wide	H	A Center	VCO A Center
3	165.9000	154.9500	No	Wide	H	A High	VCO A High
4	166.1000	155.0000	No	Wide	H	B Low	VCO B Low
5	170.1000	164.5000	No	Wide	H	B Center	VCO B Center
6	173.9000	174.0000	No	Wide	H	B High	VCO B High
7	158.1000	136.0000	No	Narrow	L	A Low	VCO A Low
8	162.1000	145.5000	No	Narrow	L	A Center	VCO A Center
9	165.9000	154.9500	No	Narrow	L	A High	VCO A High
10	166.1000	155.0000	No	Narrow	L	B Low	VCO B Low
11	170.1000	164.5000	No	Narrow	L	B Center	VCO B Center
12	173.9000	174.0000	No	Narrow	L	B High	VCO B High
13	162.1000	145.5000	Yes	Wide	H	A Center	For production Beat VCO A Center
14	170.1000	164.5000	Yes	Wide	H	B Center	For production Beat VCO B Center
15	164.5000	167.5000	No	Wide	H	A(Hi)/B(Low)	For production Center TX/RX
16	167.5000	164.5000	No	Wide	H	B(Low)/A(Hi)	For production Center TX/RX
17	164.4000	152.4000	No	Wide	H	A High	Helical (Center) Low edge
18	167.6000	155.6000	No	Wide	H	B Low	Helical (Center) High edge
19	164.4000	152.4000	No	Narrow	L	A High	Helical (Center) Low edge
20	167.6000	155.6000	No	Narrow	L	B Low	Helical (Center) High edge
21	159.6000	159.6000	No	Wide	H	A Low	Helical (Low) High edge
22	159.6000	159.6000	No	Narrow	L	A Low	Helical (Low) High edge
23	172.4000	172.4000	No	Wide	H	B High	Helical (Hi) Low edge
24	172.4000	172.4000	No	Narrow	L	B High	Helical (Hi) Low edge
25	158.1000	136.0000	No	Wide	H	A Low	In band Low edge
26	166.1000	155.0000	No	Wide	H	B Low	In band Center
27	173.9000	174.0000	No	Wide	H	B High	In band High edge
28	165.9750	165.3750	No	Wide	H	B(Low)/A(Hi)	Center LTR+KSI Repeater
29	165.9750	165.3750	No	Narrow	L	B(Low)/A(Hi)	Center LTR+KSI Repeater
30	166.5500	166.5500	No	Wide	H	B Low	For reserve and TX/RX
31	162.1000	170.1000	No	Narrow	L	A(Center)/B(Center)	For reserve and TX/RX
32	170.1000	162.1000	No	Narrow	L	B(Center)/A(Center)	For reserve and TX/RX

ADJUSTMENT

TKR-740 K3

* Factory use CH1 to CH16

CH	RX Frequency	TX Frequency	Beat Shift	W/N	Power H/L	VCO	NOTE
1	136.1000	136.0000	No	Wide	H	A Low	VCO A Low
2	139.6000	145.5000	No	Wide	H	A Center	VCO A Center
3	142.9000	154.9500	No	Wide	H	A High	VCO A High
4	143.1000	155.0000	No	Wide	H	B Low	VCO B Low
5	146.6000	164.5000	No	Wide	H	B Center	VCO B Center
6	149.9000	174.0000	No	Wide	H	B High	VCO B High
7	136.1000	136.0000	No	Narrow	L	A Low	VCO A Low
8	139.6000	145.5000	No	Narrow	L	A Center	VCO A Center
9	142.9000	154.9500	No	Narrow	L	A High	VCO A High
10	143.1000	155.0000	No	Narrow	L	B Low	VCO B Low
11	146.6000	164.5000	No	Narrow	L	B Center	VCO B Center
12	149.9000	174.0000	No	Narrow	L	B High	VCO B High
13	139.6000	145.5000	Yes	Wide	H	A Center	For production Beat VCO A Center
14	146.6000	164.5000	Yes	Wide	H	B Center	For production Beat VCO B Center
15	141.5000	144.5000	No	Wide	H	A(Hi)/B(Low)	For production Center TX/RX
16	144.5000	141.5000	No	Wide	H	B(Low)/A(Hi)	For production Center TX/RX
17	141.4000	141.4000	No	Wide	H	A High	Helical (Center) Low edge
18	144.6000	144.6000	No	Wide	H	B Low	Helical (Center) High edge
19	141.4000	141.4000	No	Narrow	L	A High	Helical (Center) Low edge
20	144.6000	144.6000	No	Narrow	L	B Low	Helical (Center) High edge
21	137.6000	137.600	No	Wide	H	A Low	Helical (Low) High edge
22	137.6000	137.600	No	Narrow	L	A Low	Helical (Low) High edge
23	148.4000	148.4000	No	Wide	H	B High	Helical (Hi) Low edge
24	148.4000	148.4000	No	Narrow	L	B High	Helical (Hi) Low edge
25	136.1000	136.0000	No	Wide	H	A Low	In band Low edge
26	143.1000	155.0000	No	Wide	H	B Low	In band Center
27	149.9000	174.0000	No	Wide	H	B High	In band High edge
28	142.9750	142.3750	No	Wide	H	B(Low)/A(Hi)	Center LTR+KSI Repeater
29	142.9750	142.3750	No	Narrow	L	B(Low)/A(Hi)	Center LTR+KSI Repeater
30	143.5500	143.5500	No	Wide	H	B Low	For reserve and TX/RX
31	139.6000	146.6000	No	Narrow	L	A(Center)/B(Center)	For reserve and TX/RX
32	146.6000	139.6000	No	Narrow	L	B(Center)/A(Center)	For reserve and TX/RX

TKR-740

ADJUSTMENT

RX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
1. Setting	1) VOL : OFF 2) 13.8V External power supply 3) POWER : ON							
2. RX Lock Voltage	1) CH6 (RX B Hi) 2) CH4 (RX B Lo) 3) CH3 (RX A Hi) 4) CH1 (RX A Lo)	DVM	RX	CV1	RX	TC2	4.5V ADJ Check	$\pm 0.1V$ 1V or more
						TC1	4.5V ADJ Check	$\pm 0.1V$ 1V or more
3. BPF Adjust	Connect the TG to RX IN, then connect CN2 to the spectrum analyzer input.	TG Spectrum Analyzer	RX IN CN2		L3	L16	Center the frequency you are using, then adjust it to look like the wave on page 80.	Refer to page 80
4. MCF Adjust (Wide)	Connect the TG to CN3, then connect CN4 to the spectrum analyzer input. 1) CH4			CN3 CN4	L31 L27 L38 L40 L43		Adjust it to look like the wave on page 80.	Refer to page 80
(Narrow)	Connect the TG to CN3, then connect CN5 to the spectrum analyzer input. 1) CH10			CN3 CN5	L32 L28 L39 L41 L44		Adjust it to look like the wave on page 80.	Refer to page 80
5. Discriminator Adjust (Wide)	Connect the SSG to RX IN 1) CH4 MOD : 1kHz DEV : 3kHz SSG : 501μV (-53dBm) AF : 0.45V/4Ω	SSG AFVM	TEST/SPKR SPO Terminal (pin 12)		L52	L53	Adjust for maximum	
(Narrow)	1) CH10 MOD : 1kHz DEV 1.5kHz SSG : 501μV (-53dBm) AF : 0.45V/4Ω							
6. Sensitivity Check (Wide)	1) Connect the SSG to RX IN, then select the channel that the user will use (Wide) MOD : 1kHz DEV : 3kHz SSG : 0.446μV (-114dBm) AF : 0.45V/4Ω	SSG Audio, Analyzer	RX IN TEST/SPKR SPO Terminal (pin 12)				Check	12dB SINAD or more
(Narrow)	1) Connect the SSG to RX IN, then select the channel that the user will use (Narrow) MOD : 1kHz DEV : 1.5kHz SSG : 0.446μV (-114dBm) AF : 0.45V/4Ω							

ADJUSTMENT

RX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
7. Analog Squelch Adjust (Wide)	1) Connect the SSG to RX IN, then select the channel that the user will use (Wide) MOD : 1kHz DEV : 3kHz SSG : 3dB below to 12dB SINAD level AF : 0.45V/4Ω	SSG Audio, Analyzer VTVM oscilloscope	RX	RX IN TEST/SPKR SPO Terminal (pin 12) 4Ω Load			PC ADJ Adjust to point of opening squelch	
	1) Connect the SSG to RX IN, then select the channel that the user will use (Narrow) MOD : 1kHz DEV : 1.5kHz SSG : 3dB below to 12dB SINAD level AF : 0.45V/4Ω							
8. RSSI Squelch Adjust (Wide)	1) Connect the SSG to RX IN, then select the channel that the user will use (Wide) MOD : 1kHz DEV : 3kHz SSG : 3dB below to 12dB SINAD level AF : 0.45V/4Ω							
	1) Connect the SSG to RX IN, then select the channel that the user will use (Narrow) MOD : 1kHz DEV : 1.5kHz SSG : 3dB below to 12dB SINAD level AF : 0.45V/4Ω							
9. RX S/N Check (Wide)	1) Connect the SSG to RX IN, then select the channel that the user will use (Wide) MOD : 1kHz DEV : 3kHz SSG : 501µV (-53dBm) AF : 2.84V/4Ω						Check	-57dB or less
	1) Connect the SSG to RX IN, then select the channel that the user will use (Narrow) MOD : 1kHz DEV : 1.5kHz SSG : 501µV (-53dBm) AF : 2.84V/4Ω							
10.RD Output Level Adjust (Wide)	1) Connect the SSG to RX IN, then select the channel that the user will use (Wide) MOD : 1kHz DEV : 3kHz SSG : 501µV (-53dBm)	SSG DVM		RX IN CONTROL I/O RD Terminal (pin 10) 600Ω Load			PC ADJ 80mV	±5mV
	1) Connect the SSG to RX IN, then select the channel that the user will use (Narrow) MOD : 1kHz DEV : 1.5kHz SSG : 501µV (-53dBm)							

TKR-740

ADJUSTMENT

RX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
11.RA Output Level Adjust (Wide)	1) Connect the SSG to RX IN, then select the channel that the user will use (Wide) MOD : 1kHz DEV : 3kHz SSG : 501μV (-53dBm)	SSG AFVM		RX IN CONTROL I/O RA Terminal (pin 11)			PC ADJ 400mV	±20mV
	2) connect the SSG to RX IN, then select the channel that the user will use (Narrow) MOD : 1kHz DEV : 1.5kHz SSG : 501μV (-53dBm)			600Ω Load				
12.RRA Output Level Adjust (Wide)	1) Connect the SSG to RX IN, then select the channel that the user will use (Wide) MOD : 1kHz DEV : 3kHz SSG : 501μV (-53dBm)	SSG AFVM		RX IN REMT I/O Remote RA Terminal (pin 1)			PC ADJ 400mV	±20mV
	2) connect the SSG to RX IN, then select the channel that the user will use (Narrow) MOD : 1kHz DEV : 1.5kHz SSG : 501μV (-53dBm)			600Ω Load				
13.Voting Pilot Tone Adjust (Wide)	1) CH4 (Center Frequency) Voting Pilot Tone : 1950Hz SSG : OFF	AFVM		CONTROL I/O RA Terminal (pin 11)			PC ADJ 400mV	±20mV
	1) CH10 (Center Frequency) Voting Pilot Tone : 1950Hz SSG : OFF							

TX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
14.TX Lock Voltage	1) CH3 (TX A Hi) 2) CH1 (TX A Lo) 3) CH6 (TX B Hi) 4) CH4 (TX B Lo)	DVM	TX A/3	CV	TX A/3	TC1	4.5V ADJ Check	±0.1V 1V or more ±0.1V 1V or more
						TC2	4.5V ADJ Check	
15.RX Ref Check	Connect a frequency counter to CN102, then measure the frequency. 1) CH2	f.counter	CN102				Check	20MHz±1ppm
16.EXT Ref check	• Connect a frequency counter to CN102, then measure the frequency. • Connect a SSG to EXT REF IN. 1) CH2 SSG : 10MHz 70.7mV (-10dBm) MOD : OFF 2) frequency=10MHz ±10ppm						Check	20MHz 20MHz±10ppm

ADJUSTMENT

TX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
17.TX Power (Hi)	Measure the power level at TX OUT. 1) CH1 (Low) 2) CH4 (Center) 3) CH6 (Hi)	Power meter	TX A/3	TX OUT			PC ADJ 5.0W (Shipping power)	±0.1W
18.TX Power (Low)	Measure the power level at TX OUT. 1) CH7 (Low) 2) CH10 (Center) 3) CH12 (Hi)			TX OUT			PC ADJ 100mW (Shipping power)	±5mW
19.Max Dev (Wide)	1) CH1 (VCO-A Lo) 2) CH2 (VCO-A Center) 3) CH3 (VCO-A Hi) 4) CH4 (VCO-B Lo) 5) CH5 (VCO-B Center) 6) CH6 (VCO-B Hi) MOD : 1kHz LEVEL: 50mV (Terminal load) LPF : 15kHz HPF : OFF Transmission	MOD ANA AG	TX B/3	Microphone MIC Terminal (pin 6)			PC ADJ 4.2kHz	±0.2kHz
	1) CH7 (VCO-A Lo) 2) CH8 (VCO-A Center) 3) CH9 (VCO-A Hi) 4) CH10 (VCO-B Lo) 5) CH11 (VCO-B Center) 6) CH12 (VCO-B Hi) MOD : 1kHz LEVEL: 50mV (Terminal load) LPF : 15kHz HPF : OFF Transmission						PC ADJ 1.7kHz	±0.1kHz
20.Mic Sensitivity Check (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) MOD : 1kHz LEVEL : 4.5mV (Terminal load) LPF : 15kHz HPF : OFF Transmission	MOD ANA Oscilloscope	TX B/3	TX OUT Microphone MIC Terminal (pin 6)			Check	3.0kHz±0.25kHz
	1) CH8 (VCO-A Center) 2) CH11 (VCO-B Center) MOD : 1kHz LEVEL : 5.5mV (Terminal load) LPF : 15kHz HPF : OFF Transmission							1.5kHz±0.2kHz

ADJUSTMENT

TX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
21.DQT Balance Adjust (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) AG.f : 50Hz (square wave) LEVEL : Insert 0.5Vp-p into the CONTROL I/O TD terminal (pin 8) LPF : 3kHz HPF : OFF Transmission	MOD ANA Oscilloscope	TX A/3	TX OUT CONTROL I/O TD Terminal (pin 8)			PC ADJ Make the demodulated waves into square waves.	 Oscilloscope DC range
(Narrow)	1) CH8 (VCO-A Center) 2) CH11 (VCO-B Center) AG.f : 50Hz (square wave) LEVEL : Insert 0.5Vp-p into the CONTROL I/O TD terminal (pin 8) LPF : 3kHz HPF : OFF Transmission							
22.TD Dev Adjust (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) AG.f : 100Hz (Sine wave) LEVEL : Insert 0.5Vp-p into the CONTROL I/O TD terminal (pin 8) LPF : 3kHz HPF : OFF Transmission						PC ADJ 0.75kHz	$\pm 0.05\text{kHz}$
(Narrow)	1) CH8 (VCO-A Center) 2) CH11 (VCO-B Center) AG.f : 100Hz (Sine wave) LEVEL : Insert 0.5Vp-p into the CONTROL I/O TD terminal (pin 8) LPF : 3kHz HPF : OFF Transmission							
23.TA Dev Adjust (Wide)	1) CH4 (Center Frequency) AG.f : 1kHz (Sine wave) LEVEL : Insert 280mV into the CONTROL I/O TA terminal (pin 9) LPF : 15kHz HPF : OFF Transmission			TX OUT CONTROL I/O TA Terminal (pin 9)			PC ADJ 3.0kHz	$\pm 0.1\text{kHz}$
(Narrow)	1) CH10 (Center Frequency) AG.f : 1kHz (Sine wave) LEVEL : Insert 280mV into the CONTROL I/O TA terminal (pin 9) LPF : 15kHz HPF : OFF Transmission						PC ADJ 1.5kHz	$\pm 0.05\text{kHz}$

ADJUSTMENT

TX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
24.TA Dev Check (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) AG.f : 1kHz LEVEL : 280mV LPF : 15kHz HPF : OFF Transmission	MOD ANA Oscilloscope	TX A/3	TX OUT CONTROL I/O TA Terminal (pin 9)			Check	3.0kHz±0.1kHz
	1) CH8 (VCO-A Center) 2) CH11 (VCO-B Center) AG.f : 1kHz LEVEL : 280mV LPF : 15kHz HPF : OFF Transmission							1.5kHz±0.05kHz
25.RTA Dev Adjust (Wide)	1) CH4 (Center Frequency) AG.f : 1kHz (Sine wave) LEVEL : Insert 280mV into the REMT I/O Remote TA terminal (pin 2) LPF : 15kHz HPF : OFF Transmission			TX OUT REMT I/O Remote TA Terminal (pin 2)			PC ADJ 3.0kHz	±0.1kHz
	1) CH10 (Center Frequency) AG.f : 1kHz (Sine wave) LEVEL : Insert 280mV into the REMT I/O Remote TA terminal (pin 2) LPF : 15kHz HPF : OFF Transmission							±0.05kHz
26.RTA Dev Check (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) AG.f : 1kHz (Sine wave) LEVEL : 280mV LPF : 15kHz HPF : OFF Transmission						Check	3.0kHz±0.1kHz
	1) CH8 (VCO-A Center) 2) CH11 (VCO-B Center) AG.f : 50kHz LEVEL : 280mV LPF : 15kHz HPF : OFF Transmission							1.5kHz±0.05kHz
27.QT Dev Adjust (Wide)	1) CH4 (Center Frequency) QT : 151.4Hz LPF : 3kHz HPF : OFF Detector : p-p/2 Transmission			TX OUT			PC ADJ 0.75kHz	±0.05kHz
	1) CH10 (Center Frequency) QT : 151.4Hz Transmission							±0.05kHz

TKR-740

ADJUSTMENT

TX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
28.QT Dev Check (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) QT : 151.4Hz LPF : 3kHz HPF : OFF Detector : p-p/2 Transmission	MOD ANA Oscilloscope	TX A/3	TX OUT			Check	0.75kHz±0.05kHz
	1) CH8 (VCO-A Center) 2) CH11 (VCO-B Center) QT : 151.4Hz Transmission							0.35kHz±0.05kHz
29.DQT Dev Adjust (Wide)	1) CH4 (Center Frequency) DQT : 023N LPF : 3kHz HPF : OFF Detector : Peak Hold Transmission						PC ADJ 0.75kHz	±0.05kHz
	1) CH10 (Center Frequency) DQT : 023N Transmission						PC ADJ 0.35kHz	±0.05kHz
30.DQT Dev Check (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) DQT : 023N LPF : 3kHz HPF : OFF Detector : Peak Hold Transmission						Check	0.75kHz±0.1kHz
	1) CH8 (VCO-A Center) 2) CH11 (VCO-B Center) DQT : 023N Transmission							0.35kHz±0.05kHz
31.Test Tone Dev Adjust (Wide)	1) CH4 (Center Frequency) TEST TONE : 1kHz LPF : 15kHz HPF : OFF Transmission						PC ADJ 3kHz	±0.1kHz
	1) CH10 (Center Frequency) TEST TONE : 1kHz Transmission						PC ADJ 1.5kHz	±0.05kHz
32.CW ID Dev Adjust (Wide)	1) CH4 (Center Frequency) LPF : 15kHz HPF : OFF Transmission						PC ADJ 2kHz	±0.1kHz
	1) CH10 (Center Frequency) Transmission						PC ADJ 1kHz	±0.05kHz

ADJUSTMENT


TX UNIT

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test equipment	Unit	Terminal	Unit	Parts	Method	
33.Repeat Gain Level Adjust (Wide)	1) CH4 (Center Frequency) MOD : 1kHz DEV : 1kHz LEVEL : 501μV (-53dBm) LPF : 15kHz HPF : OFF Transmission	MOD ANA Oscilloscope	TX A/3	TX OUT			PC ADJ 1kHz	±0.2kHz
(Narrow)	1) CH10 (Center Frequency) MOD : 1kHz DEV : 1kHz LEVEL : 501μV (-53dBm) Transmission						PC ADJ 1kHz	
34.Pager Shift Level Writing	1) CH2 (VCO-A Center)						PC ADJ writing	137
35.Pager Waveform Balance Adjust	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) LPF : 3kHz HPF : OFF Transmission						Make the demodulated wave square	 Oscilloscope DC range
36.TX S/N Check (Wide)	1) CH2 (VCO-A Center) 2) CH5 (VCO-B Center) No modulation LPF : 3kHz HPF : 300Hz De-emphasis : 750μS Transmission						Check	-56dB or less
(Narrow)	3) CH8 (VCO-A Center) 4) CH11 (VCO-B Center) Transmission							-53dB or less

TKR-740

ADJUSTMENT


BPF-wave

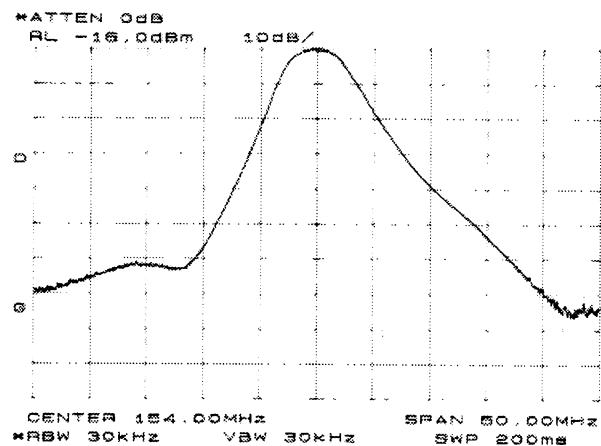


Example :The wave will look like this when using a frequency of 154,000 MHz

MCF-wave

(Wide)

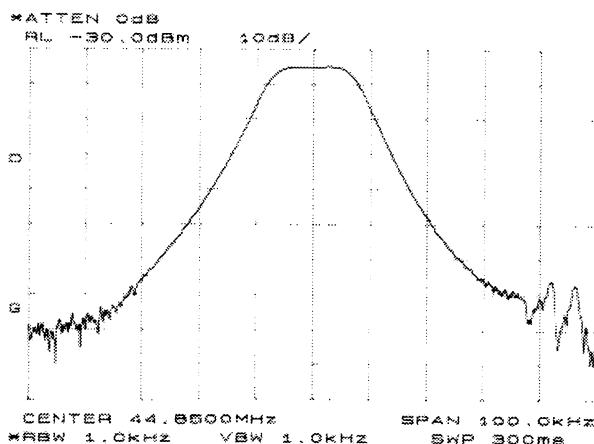

(Narrow)

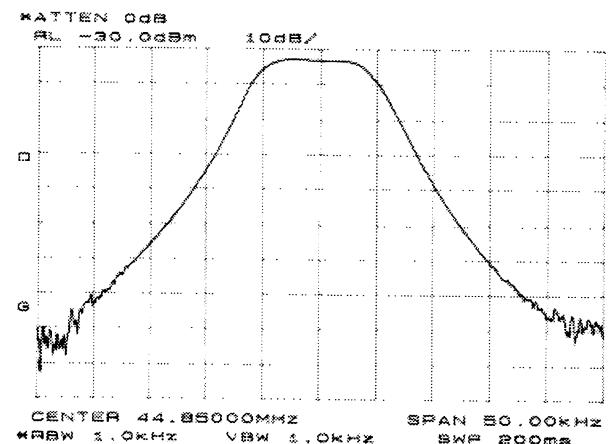

PC BOARD VIEWS

TKR-740

CONTROL UNIT
(X53-3880-10) (A/4)


Component Side View

Ref. No. Address

IC1	9J
IC2	9E
IC3	9F
IC4	9K
IC5	9L
IC6	9M
IC7	4D
IC8	7L
IC9	6L
IC10	6H
IC11	6I
IC12	1C4
IC13	1C5
IC14	1C6
IC15	1C7
IC16	1C8
IC17	1C9
IC18	1C10
IC19	1C11
IC20	1C12
IC21	1C13
IC22	1C14
IC23	1C15
IC24	1C16
IC25	1C17
IC26	1C18
IC27	1C19
IC28	1C20
IC29	1C21
IC30	1C22
IC31	1C23
IC32	1C24
IC33	1C25
IC34	1C26
IC35	1C27
IC36	1C28
IC37	1C29
IC38	1C30
IC39	1C31
IC40	1C32
IC41	1C33
IC42	1C34
IC43	1C35
IC44	1C36
IC45	1C37
IC46	1C38
IC47	1C39
IC48	1C40
IC49	1C41
IC50	1C42
IC51	1C43
IC52	1C44
IC53	1C45
IC54	1C46
IC55	1C47
IC56	1C48
IC57	1C49
IC58	1C50
IC59	1C51
IC60	1C52
IC61	1C53
IC62	1C54
IC63	1C55
IC64	1C56
IC65	1C57
IC66	1C58
IC67	1C59
IC68	1C60
IC69	1C61
IC70	1C62
IC71	1C63
IC72	1C64
IC73	1C65
IC74	1C66
IC75	1C67
IC76	1C68
IC77	1C69
IC78	1C70
IC79	1C71
IC80	1C72
IC81	1C73
IC82	1C74
IC83	1C75
IC84	1C76
IC85	1C77
IC86	1C78
IC87	1C79
IC88	1C80
IC89	1C81
IC90	1C82
IC91	1C83
IC92	1C84
IC93	1C85
IC94	1C86
IC95	1C87
IC96	1C88
IC97	1C89
IC98	1C90
IC99	1C91
IC100	1C92
IC101	1C93
IC102	1C94
IC103	1C95
IC104	1C96
IC105	1C97
IC106	1C98
IC107	1C99
IC108	1C100
IC109	1C101
IC110	1C102
IC111	1C103
IC112	1C104
IC113	1C105
IC114	1C106
IC115	1C107
IC116	1C108
IC117	1C109
IC118	1C110
IC119	1C111
IC120	1C112
IC121	1C113
IC122	1C114
IC123	1C115
IC124	1C116
IC125	1C117
IC126	1C118
IC127	1C119
IC128	1C120
IC129	1C121
IC130	1C122
IC131	1C123
IC132	1C124
IC133	1C125
IC134	1C126
IC135	1C127
IC136	1C128
IC137	1C129
IC138	1C130
IC139	1C131
IC140	1C132
IC141	1C133
IC142	1C134
IC143	1C135
IC144	1C136
IC145	1C137
IC146	1C138
IC147	1C139
IC148	1C140
IC149	1C141
IC150	1C142
IC151	1C143
IC152	1C144
IC153	1C145
IC154	1C146
IC155	1C147
IC156	1C148
IC157	1C149
IC158	1C150
IC159	1C151
IC160	1C152
IC161	1C153
IC162	1C154
IC163	1C155
IC164	1C156
IC165	1C157
IC166	1C158
IC167	1C159
IC168	1C160
IC169	1C161
IC170	1C162
IC171	1C163
IC172	1C164
IC173	1C165
IC174	1C166
IC175	1C167
IC176	1C168
IC177	1C169
IC178	1C170
IC179	1C171
IC180	1C172
IC181	1C173
IC182	1C174
IC183	1C175
IC184	1C176
IC185	1C177
IC186	1C178
IC187	1C179
IC188	1C180
IC189	1C181
IC190	1C182
IC191	1C183
IC192	1C184
IC193	1C185
IC194	1C186
IC195	1C187
IC196	1C188
IC197	1C189
IC198	1C190
IC199	1C191
IC200	1C192
IC201	1C193
IC202	1C194
IC203	1C195
IC204	1C196
IC205	1C197
IC206	1C198
IC207	1C199
IC208	1C200
IC209	1C201
IC210	1C202
IC211	1C203
IC212	1C204
IC213	1C205
IC214	1C206
IC215	1C207
IC216	1C208
IC217	1C209
IC218	1C210
IC219	1C211
IC220	1C212
IC221	1C213
IC222	1C214
IC223	1C215
IC224	1C216
IC225	1C217
IC226	1C218
IC227	1C219
IC228	1C220
IC229	1C221
IC230	1C222
IC231	1C223
IC232	1C224
IC233	1C225
IC234	1C226
IC235	1C227
IC236	1C228
IC237	1C229
IC238	1C230
IC239	1C231
IC240	1C232
IC241	1C233
IC242	1C234
IC243	1C235
IC244	1C236
IC245	1C237
IC246	1C238
IC247	1C239
IC248	1C240
IC249	1C241
IC250	1C242
IC251	1C243
IC252	1C244
IC253	1C245
IC254	1C246
IC255	1C247
IC256	1C248
IC257	1C249
IC258	1C250
IC259	1C251
IC260	1C252
IC261	1C253
IC262	1C254
IC263	1C255
IC264	1C256
IC265	1C257
IC266	1C258
IC267	1C259
IC268	1C260
IC269	1C261
IC270	1C262
IC271	1C263
IC272	1C264
IC273	1C265
IC274	1C266
IC275	1C267
IC276	1C268
IC277	1C269
IC278	1C270
IC279	1C271
IC280	1C272
IC281	1C273
IC282	1C274
IC283	1C275
IC284	1C276
IC285	1C277
IC286	1C278
IC287	1C279
IC288	1C280
IC289	1C281
IC290	1C282
IC291	1C283
IC292	1C284
IC293	1C285
IC294	1C286
IC295	1C287
IC296	1C288
IC297	1C289
IC298	1C290
IC299	1C291
IC300	1C292
IC301	1C293
IC302	1C294
IC303	1C295
IC304	1C296
IC305	1C297
IC306	1C298
IC307	1C299
IC308	1C300
IC309	1C301
IC310	1C302
IC311	1C303
IC312	1C304
IC313	1C305
IC314	1C306
IC315	1C307
IC316	1C308
IC317	1C309
IC318	1C310
IC319	1C311
IC320	1C312
IC321	1C313
IC322	1C314
IC323	1C315
IC324	1C316
IC325	1C317
IC326	1C318
IC327	1C319
IC328	1C320
IC329	1C321
IC330</	

PC BOARD VIEW TKR-740


CONTROL UNIT (X53-3880-10) (A4) Component Side + Foil Side View
 CONTROL UNIT (X53-3880-10) (A4) Component Side
 CONTROL UNIT (X53-3880-10) (A4) Foil Side View

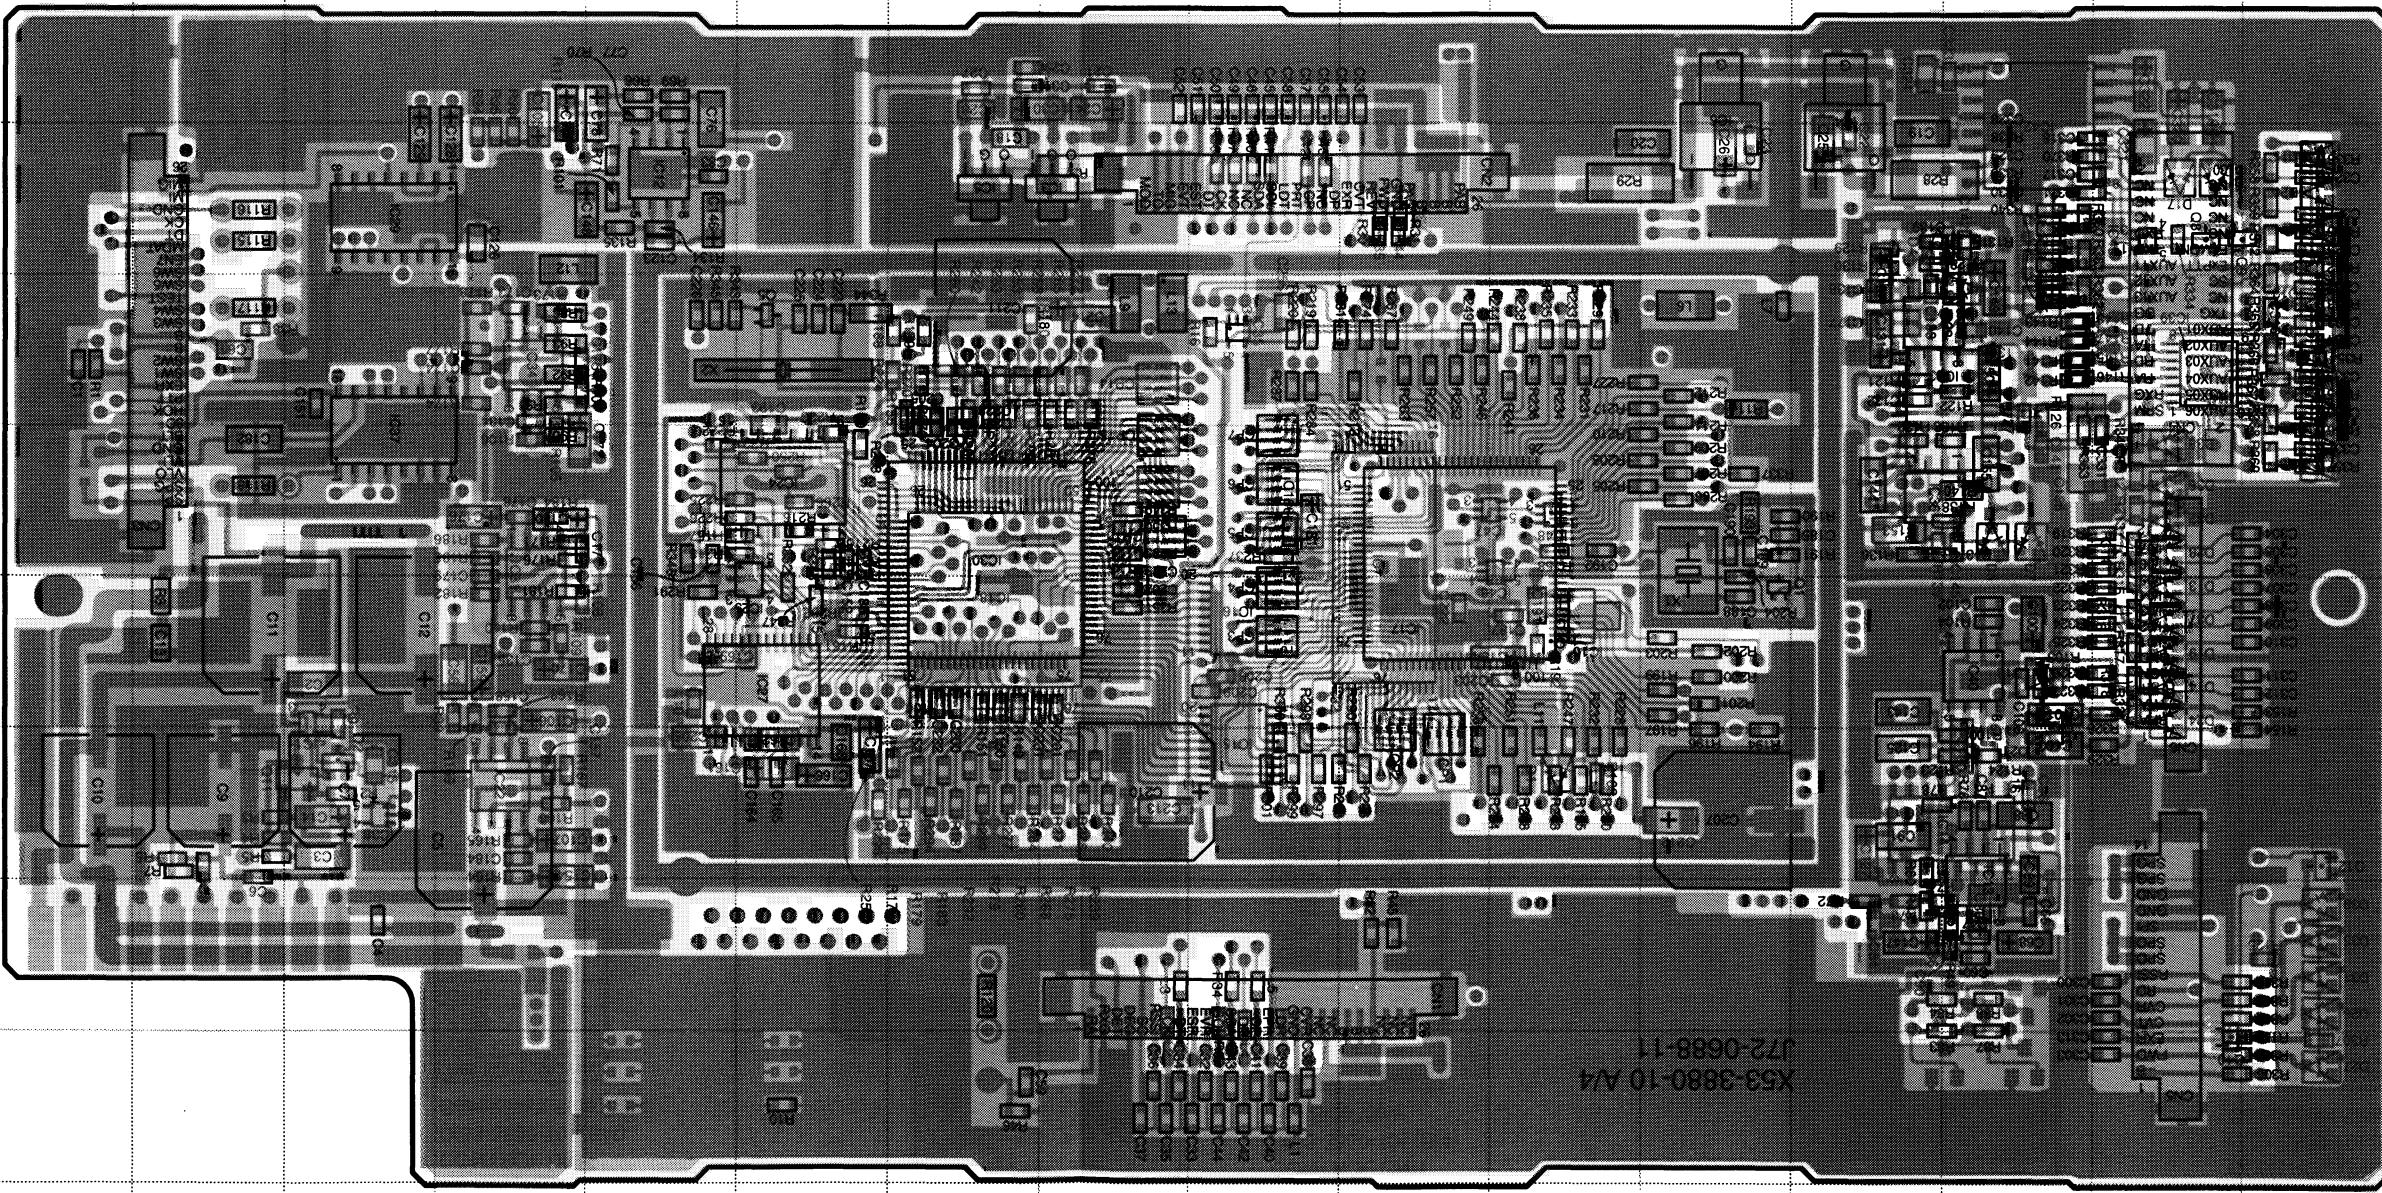

CONTROL UNIT (X53-3880-10) (A4) Component Side + Foil Side View


Ref. No.	Address	IC1	IC2	IC3	IC4	IC5	IC6	IC7	IC8	IC9	IC10	IC11	IC12	IC13	IC14	IC15	IC16	IC17	IC18	IC19	IC20	IC21	IC22	IC23	IC24	IC25	IC26	IC27	IC28	IC29	IC30	IC31	IC32	IC33	IC34	IC35	IC36	IC37	IC38	IC39	IC40	IC41	IC42	IC43	IC44	IC45	IC46	IC47	IC48	IC49	IC50	IC51	IC52	IC53	IC54	IC55	IC56	IC57	IC58	IC59	IC60	IC61	IC62	IC63	IC64	IC65	IC66	IC67	IC68	IC69	IC70	IC71	IC72	IC73	IC74	IC75	IC76	IC77	IC78	IC79	IC80	IC81	IC82	IC83	IC84	IC85	IC86	IC87	IC88	IC89	IC90	IC91	IC92	IC93	IC94	IC95	IC96	IC97	IC98	IC99	IC100	IC101	IC102	IC103	IC104	IC105	IC106	IC107	IC108	IC109	IC110	IC111	IC112	IC113	IC114	IC115	IC116	IC117	IC118	IC119	IC120	IC121	IC122	IC123	IC124	IC125	IC126	IC127	IC128	IC129	IC130	IC131	IC132	IC133	IC134	IC135	IC136	IC137	IC138	IC139	IC140	IC141	IC142	IC143	IC144	IC145	IC146	IC147	IC148	IC149	IC150	IC151	IC152	IC153	IC154	IC155	IC156	IC157	IC158	IC159	IC160	IC161	IC162	IC163	IC164	IC165	IC166	IC167	IC168	IC169	IC170	IC171	IC172	IC173	IC174	IC175	IC176	IC177	IC178	IC179	IC180	IC181	IC182	IC183	IC184	IC185	IC186	IC187	IC188	IC189	IC190	IC191	IC192	IC193	IC194	IC195	IC196	IC197	IC198	IC199	IC200	IC201	IC202	IC203	IC204	IC205	IC206	IC207	IC208	IC209	IC210	IC211	IC212	IC213	IC214	IC215	IC216	IC217	IC218	IC219	IC220	IC221	IC222	IC223	IC224	IC225	IC226	IC227	IC228	IC229	IC230	IC231	IC232	IC233	IC234	IC235	IC236	IC237	IC238	IC239	IC240	IC241	IC242	IC243	IC244	IC245	IC246	IC247	IC248	IC249	IC250	IC251	IC252	IC253	IC254	IC255	IC256	IC257	IC258	IC259	IC260	IC261	IC262	IC263	IC264	IC265	IC266	IC267	IC268	IC269	IC270	IC271	IC272	IC273	IC274	IC275	IC276	IC277	IC278	IC279	IC280	IC281	IC282	IC283	IC284	IC285	IC286	IC287	IC288	IC289	IC290	IC291	IC292	IC293	IC294	IC295	IC296	IC297	IC298	IC299	IC300	IC301	IC302	IC303	IC304	IC305	IC306	IC307	IC308	IC309	IC310	IC311	IC312	IC313	IC314	IC315	IC316	IC317	IC318	IC319	IC320	IC321	IC322	IC323	IC324	IC325	IC326	IC327	IC328	IC329	IC330	IC331	IC332	IC333	IC334	IC335	IC336	IC337	IC338	IC339	IC340	IC341	IC342	IC343	IC344	IC345	IC346	IC347	IC348	IC349	IC350	IC351	IC352	IC353	IC354	IC355	IC356	IC357	IC358	IC359	IC360	IC361	IC362	IC363	IC364	IC365	IC366	IC367	IC368	IC369	IC370	IC371	IC372	IC373	IC374	IC375	IC376	IC377	IC378	IC379	IC380	IC381	IC382	IC383	IC384	IC385	IC386	IC387	IC388	IC389	IC390	IC391	IC392	IC393	IC394	IC395	IC396	IC397	IC398	IC399	IC400	IC401	IC402	IC403	IC404	IC405	IC406	IC407	IC408	IC409	IC410	IC411	IC412	IC413	IC414	IC415	IC416	IC417	IC418	IC419	IC420	IC421	IC422	IC423	IC424	IC425	IC426	IC427	IC428	IC429	IC430	IC431	IC432	IC433	IC434	IC435	IC436	IC437	IC438	IC439	IC440	IC441	IC442	IC443	IC444	IC445	IC446	IC447	IC448	IC449	IC450	IC451	IC452	IC453	IC454	IC455	IC456	IC457	IC458	IC459	IC460	IC461	IC462	IC463	IC464	IC465	IC466	IC467	IC468	IC469	IC470	IC471	IC472	IC473	IC474	IC475	IC476	IC477	IC478	IC479	IC480	IC481	IC482	IC483	IC484	IC485	IC486	IC487	IC488	IC489	IC490	IC491	IC492	IC493	IC494	IC495	IC496	IC497	IC498	IC499	IC500	IC501	IC502	IC503	IC504	IC505	IC506	IC507	IC508	IC509	IC510	IC511	IC512	IC513	IC514	IC515	IC516	IC517	IC518	IC519	IC520	IC521	IC522	IC523	IC524	IC525	IC526	IC527	IC528	IC529	IC530	IC531	IC532	IC533	IC534	IC535	IC536	IC537	IC538	IC539	IC540	IC541	IC542	IC543	IC544	IC545	IC546	IC547	IC548	IC549	IC550	IC551	IC552	IC553	IC554	IC555	IC556	IC557	IC558	IC559	IC560	IC561	IC562	IC563	IC564	IC565	IC566	IC567	IC568	IC569	IC570	IC571	IC572	IC573	IC574	IC575	IC576	IC577	IC578	IC579	IC580	IC581	IC582	IC583	IC584	IC585	IC586	IC587	IC588	IC589	IC590	IC591	IC592	IC593	IC594	IC595	IC596	IC597	IC598	IC599	IC600	IC601	IC602	IC603	IC604	IC605	IC606	IC607	IC608	IC609	IC610	IC611	IC612	IC613	IC614	IC615	IC616	IC617	IC618	IC619	IC620	IC621	IC622	IC623	IC624	IC625	IC626	IC627	IC628	IC629	IC630	IC631	IC632	IC633	IC634	IC635	IC636	IC637	IC638	IC639	IC640	IC641	IC642	IC643	IC644	IC645	IC646	IC647	IC648	IC649	IC650	IC651	IC652	IC653	IC654	IC655	IC656	IC657	IC658	IC659	IC660	IC661	IC662	IC663	IC664	IC665	IC666	IC667	IC668	IC669	IC670	IC671	IC672	IC673	IC674	IC675	IC676	IC677	IC678	IC679	IC680	IC681	IC682	IC683	IC684	IC685	IC686	IC687	IC688	IC689	IC690	IC691	IC692	IC693	IC694	IC695	IC696	IC697	IC698	IC699	IC700	IC701	IC702	IC703	IC704	IC705	IC706	IC707	IC708	IC709	IC710	IC711	IC712	IC713	IC714	IC715	IC716	IC717	IC718	IC719	IC720	IC721	IC722	IC723	IC724	IC725	IC726	IC727	IC728	IC729	IC730	IC731	IC732	IC733	IC734	IC735	IC736	IC737	IC738	IC739	IC740	IC741	IC742	IC743	IC744	IC745	IC746	IC747	IC748	IC749	IC750	IC751	IC752	IC753	IC754	IC755	IC756	IC757	IC758	IC759	IC760	IC761	IC762	IC763	IC764	IC765	IC766	IC767	IC768	IC769	IC770	IC771	IC772	IC773	IC774	IC775	IC776	IC777	IC778	IC779	IC780	IC781	IC782	IC783	IC784	IC785	IC786	IC787	IC788	IC789	IC790	IC791	IC792	IC793	IC794	IC795	IC796	IC797	IC798	IC799	IC800	IC801	IC802	IC803	IC804	IC805	IC806	IC807	IC808	IC809	IC810	IC811	IC812	IC813	IC814	IC815	IC816	IC817	IC818	IC819	IC820	IC821	IC822	IC823	IC824	IC825	IC826	IC827	IC828	IC829	IC830	IC831	IC832</

TKR-740 PC BOARD VIEW

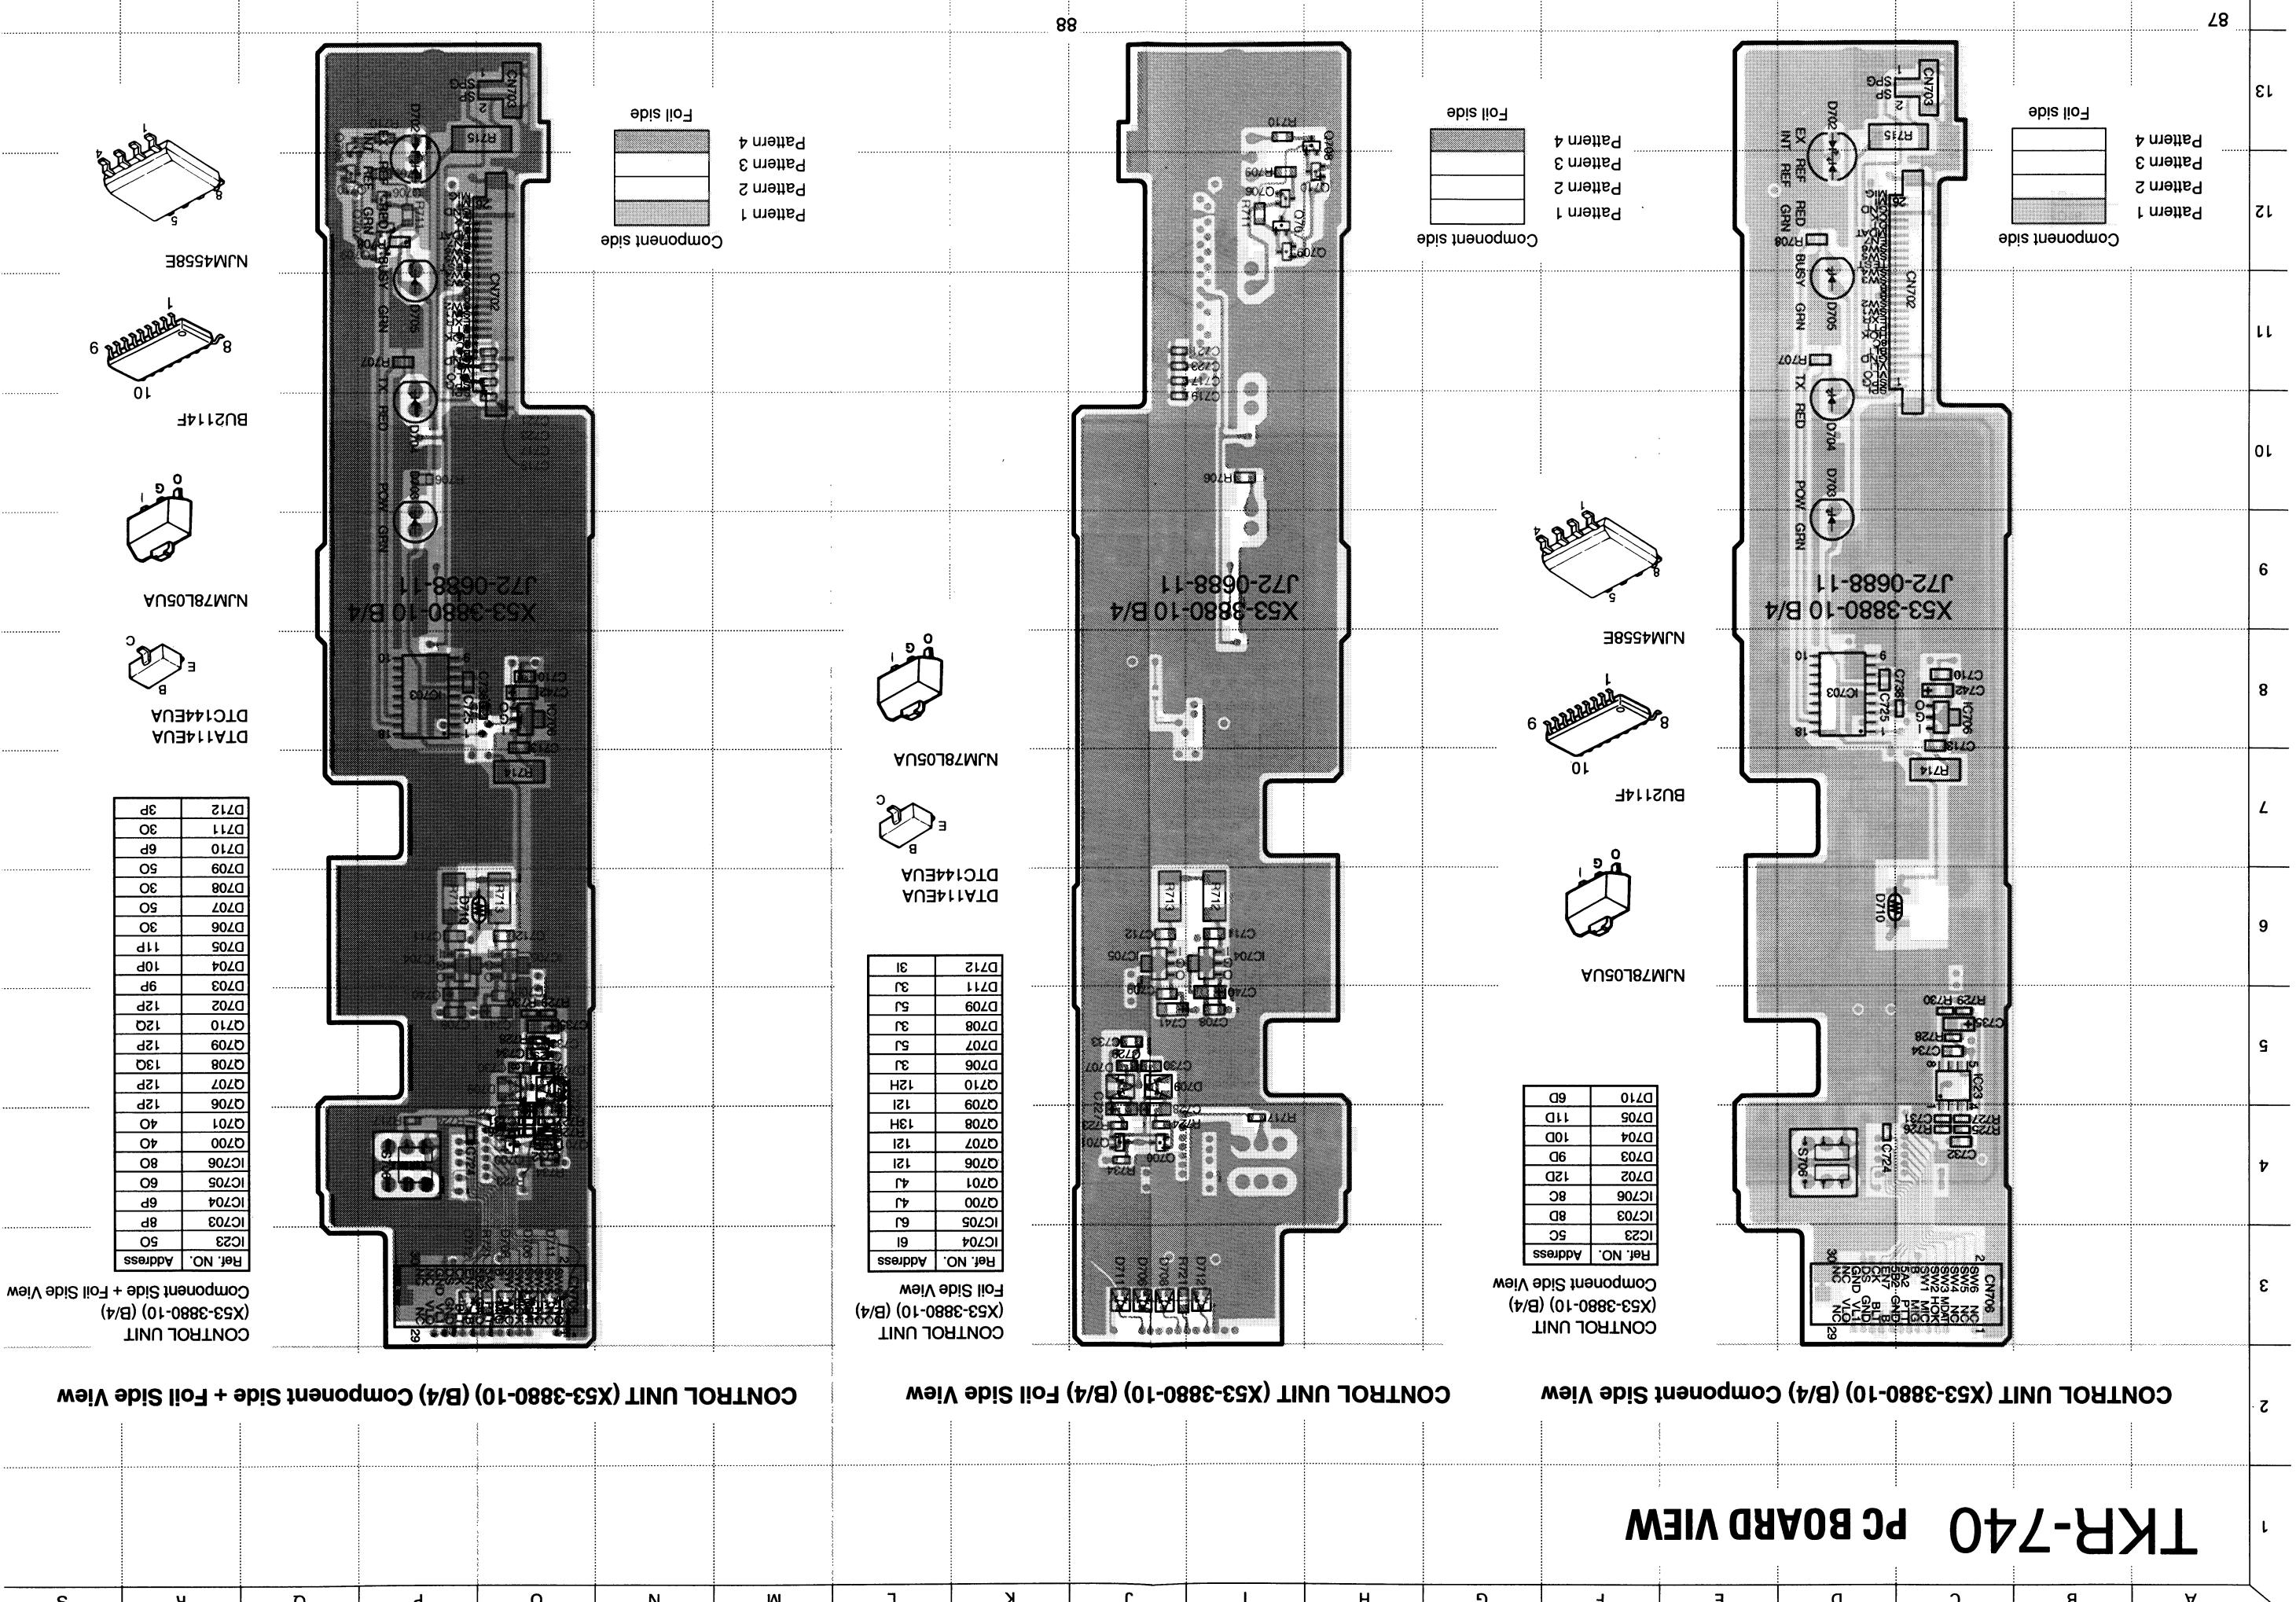


PC BOARD VIEW TKR-740


CONTROL UNIT (X53-3880-10) (C/4) Component Side View

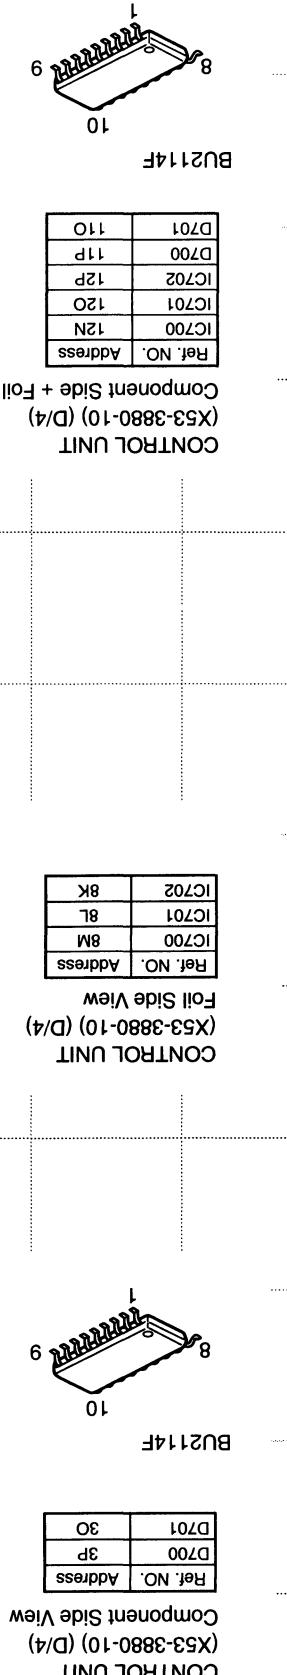


CONTROL UNIT (X53-3880-10) (D/4)
Foil Side View

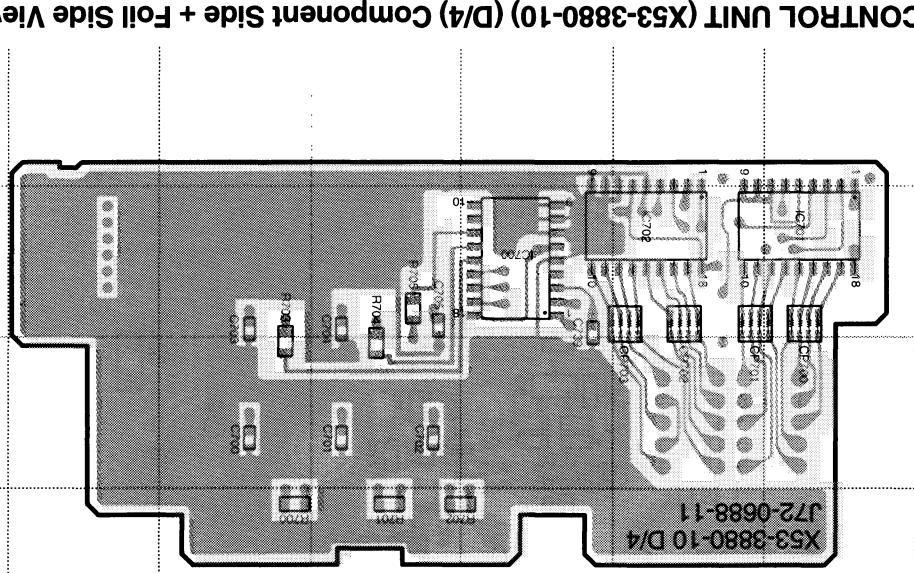


CONTROL UNIT (X53-3880-10) (D/4)
Component Side + Foil Side View

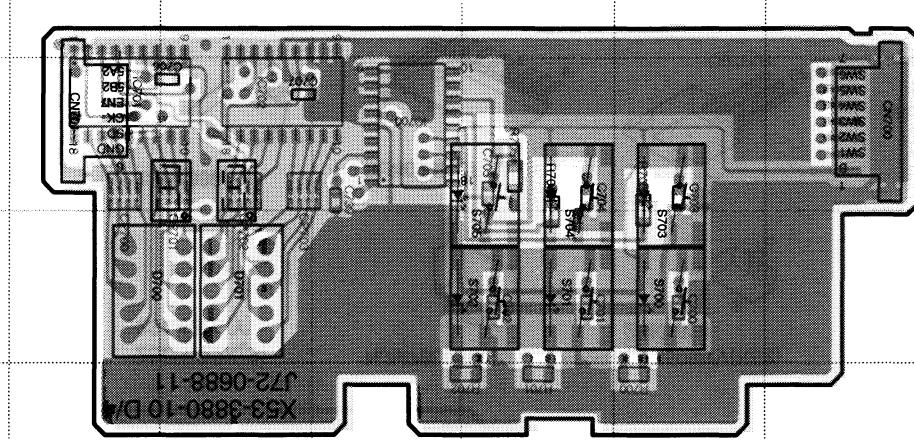



CONTROL UNIT (X53-3880-10) (C/4) Component Side View

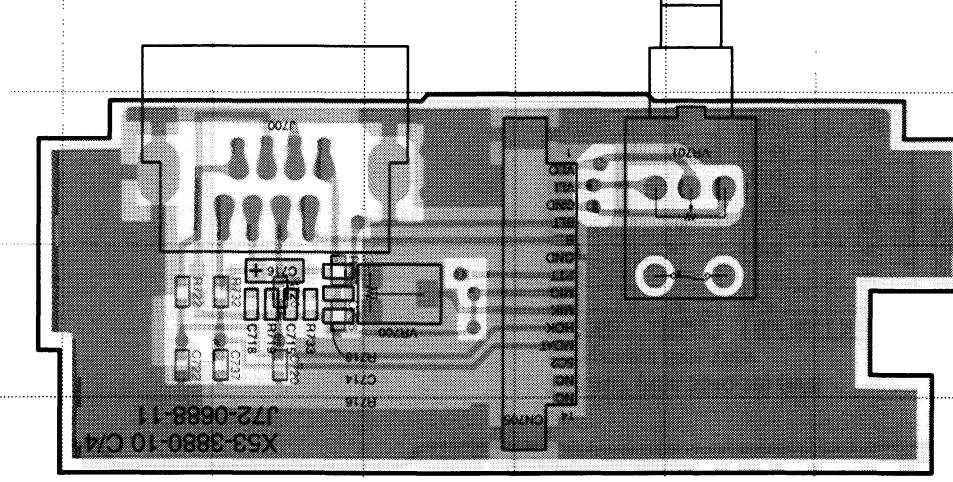

CONTROL UNIT (X53-3880-10) (C/4) Foil Side View

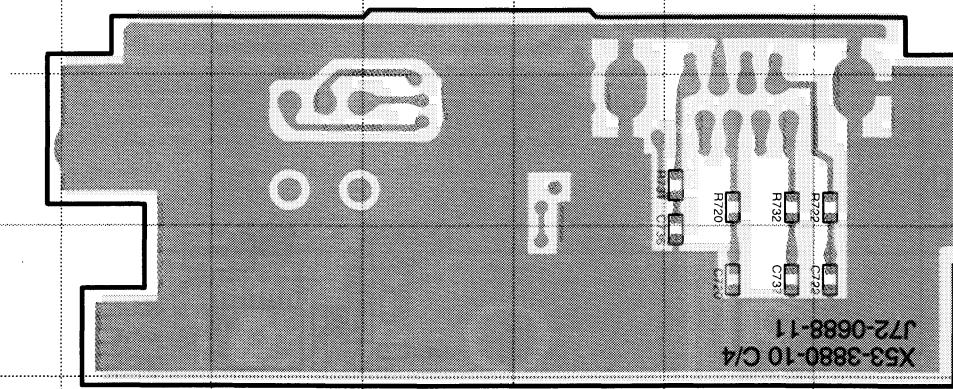


CONTROL UNIT (X53-3880-10) (C/4) Component Side + Foil Side View

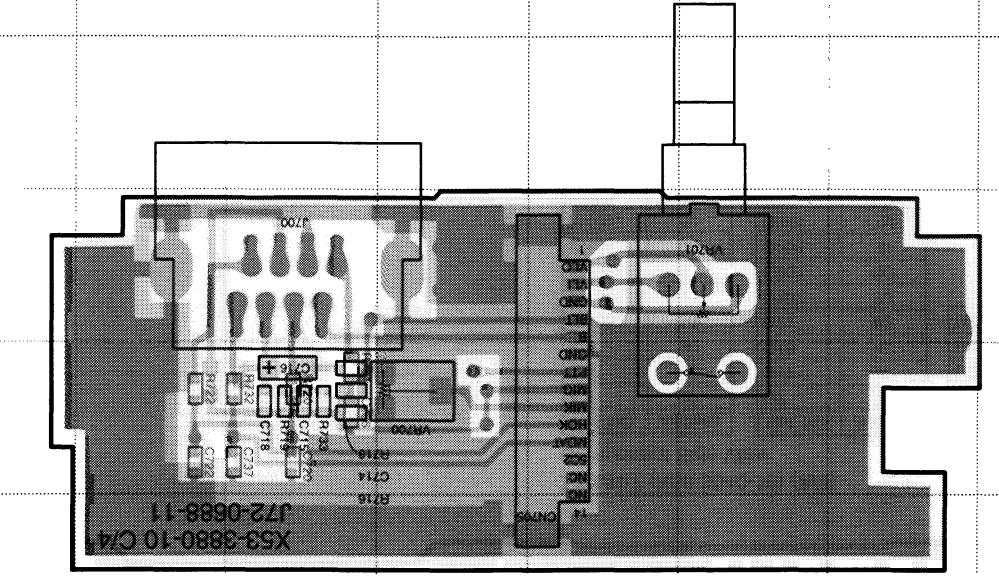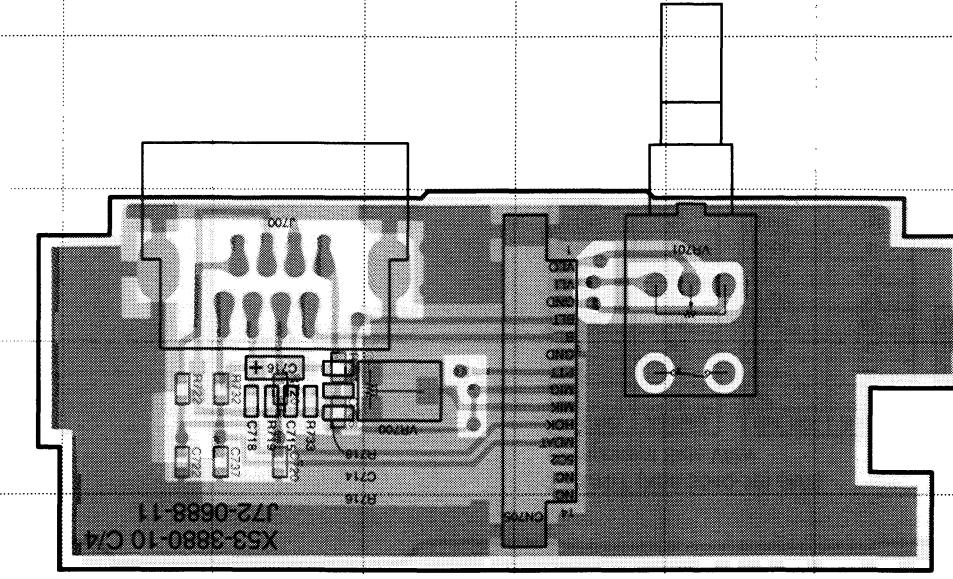


TKR-740 PC BOARD VIEW

TX UNIT (X56-3040-10) (A3) Component Side View

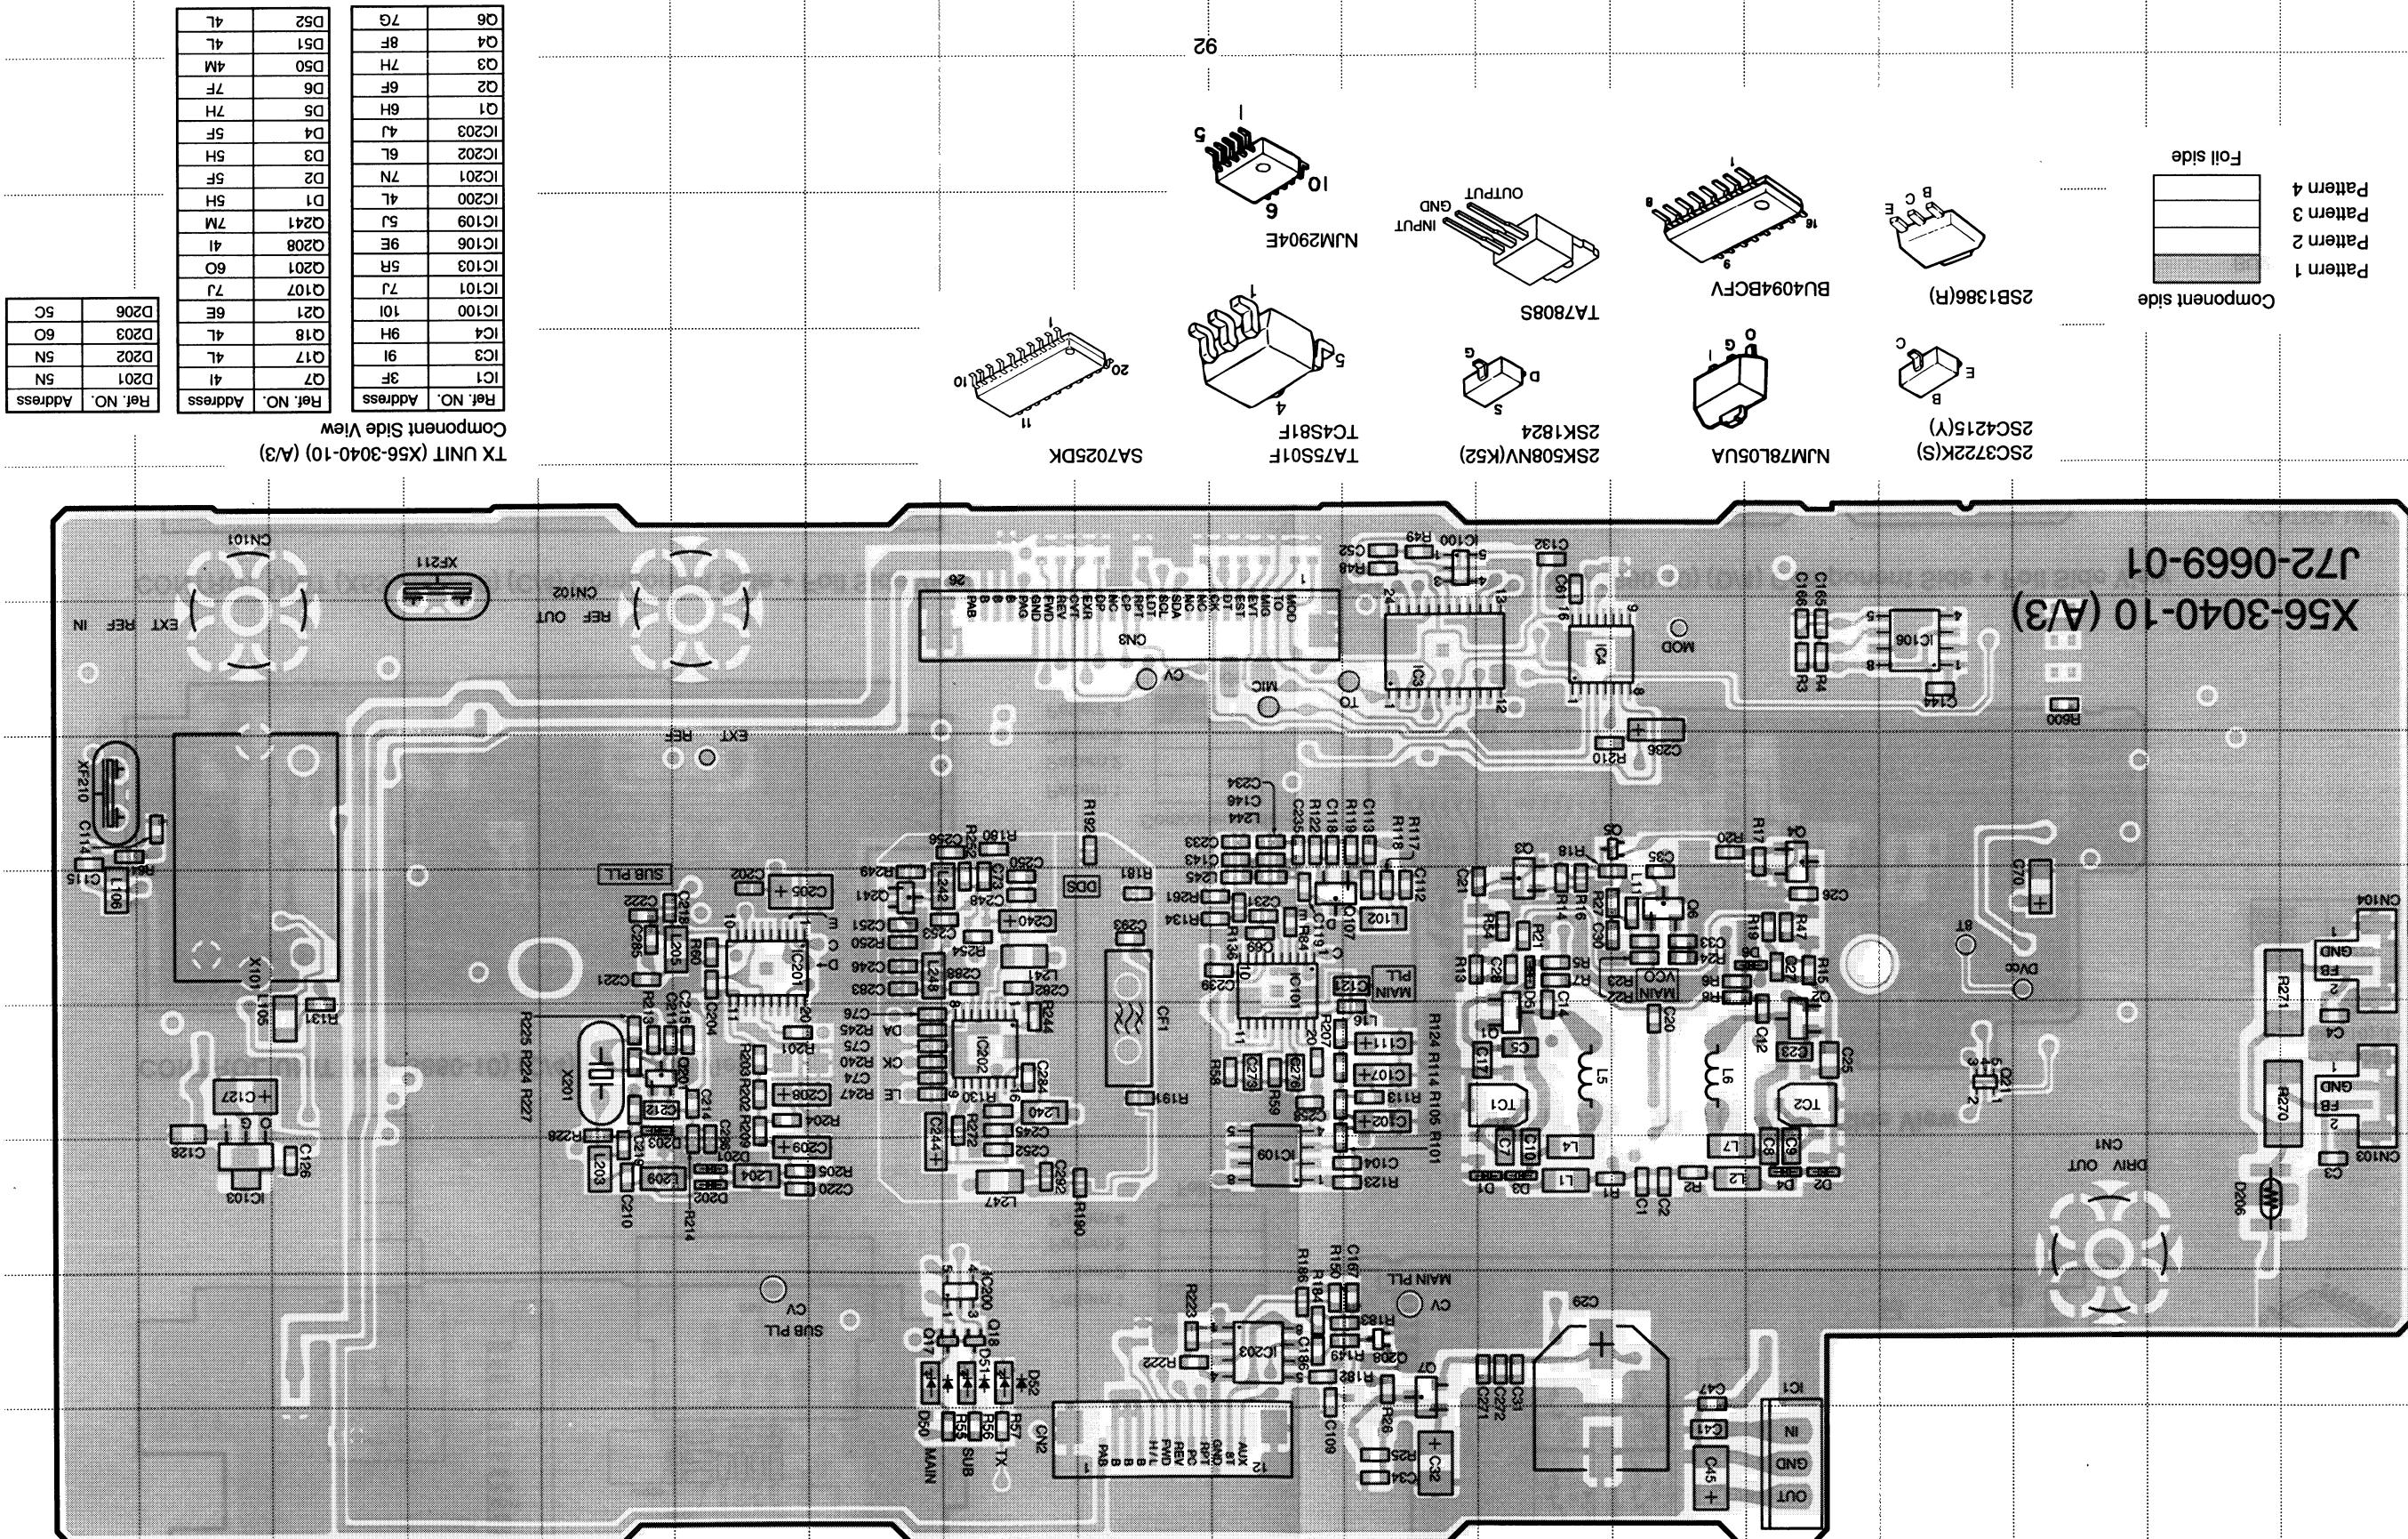

PC BOARD VIEW TKR-740

TX UNIT (X56-3040-10) (A/3) Foil Side View


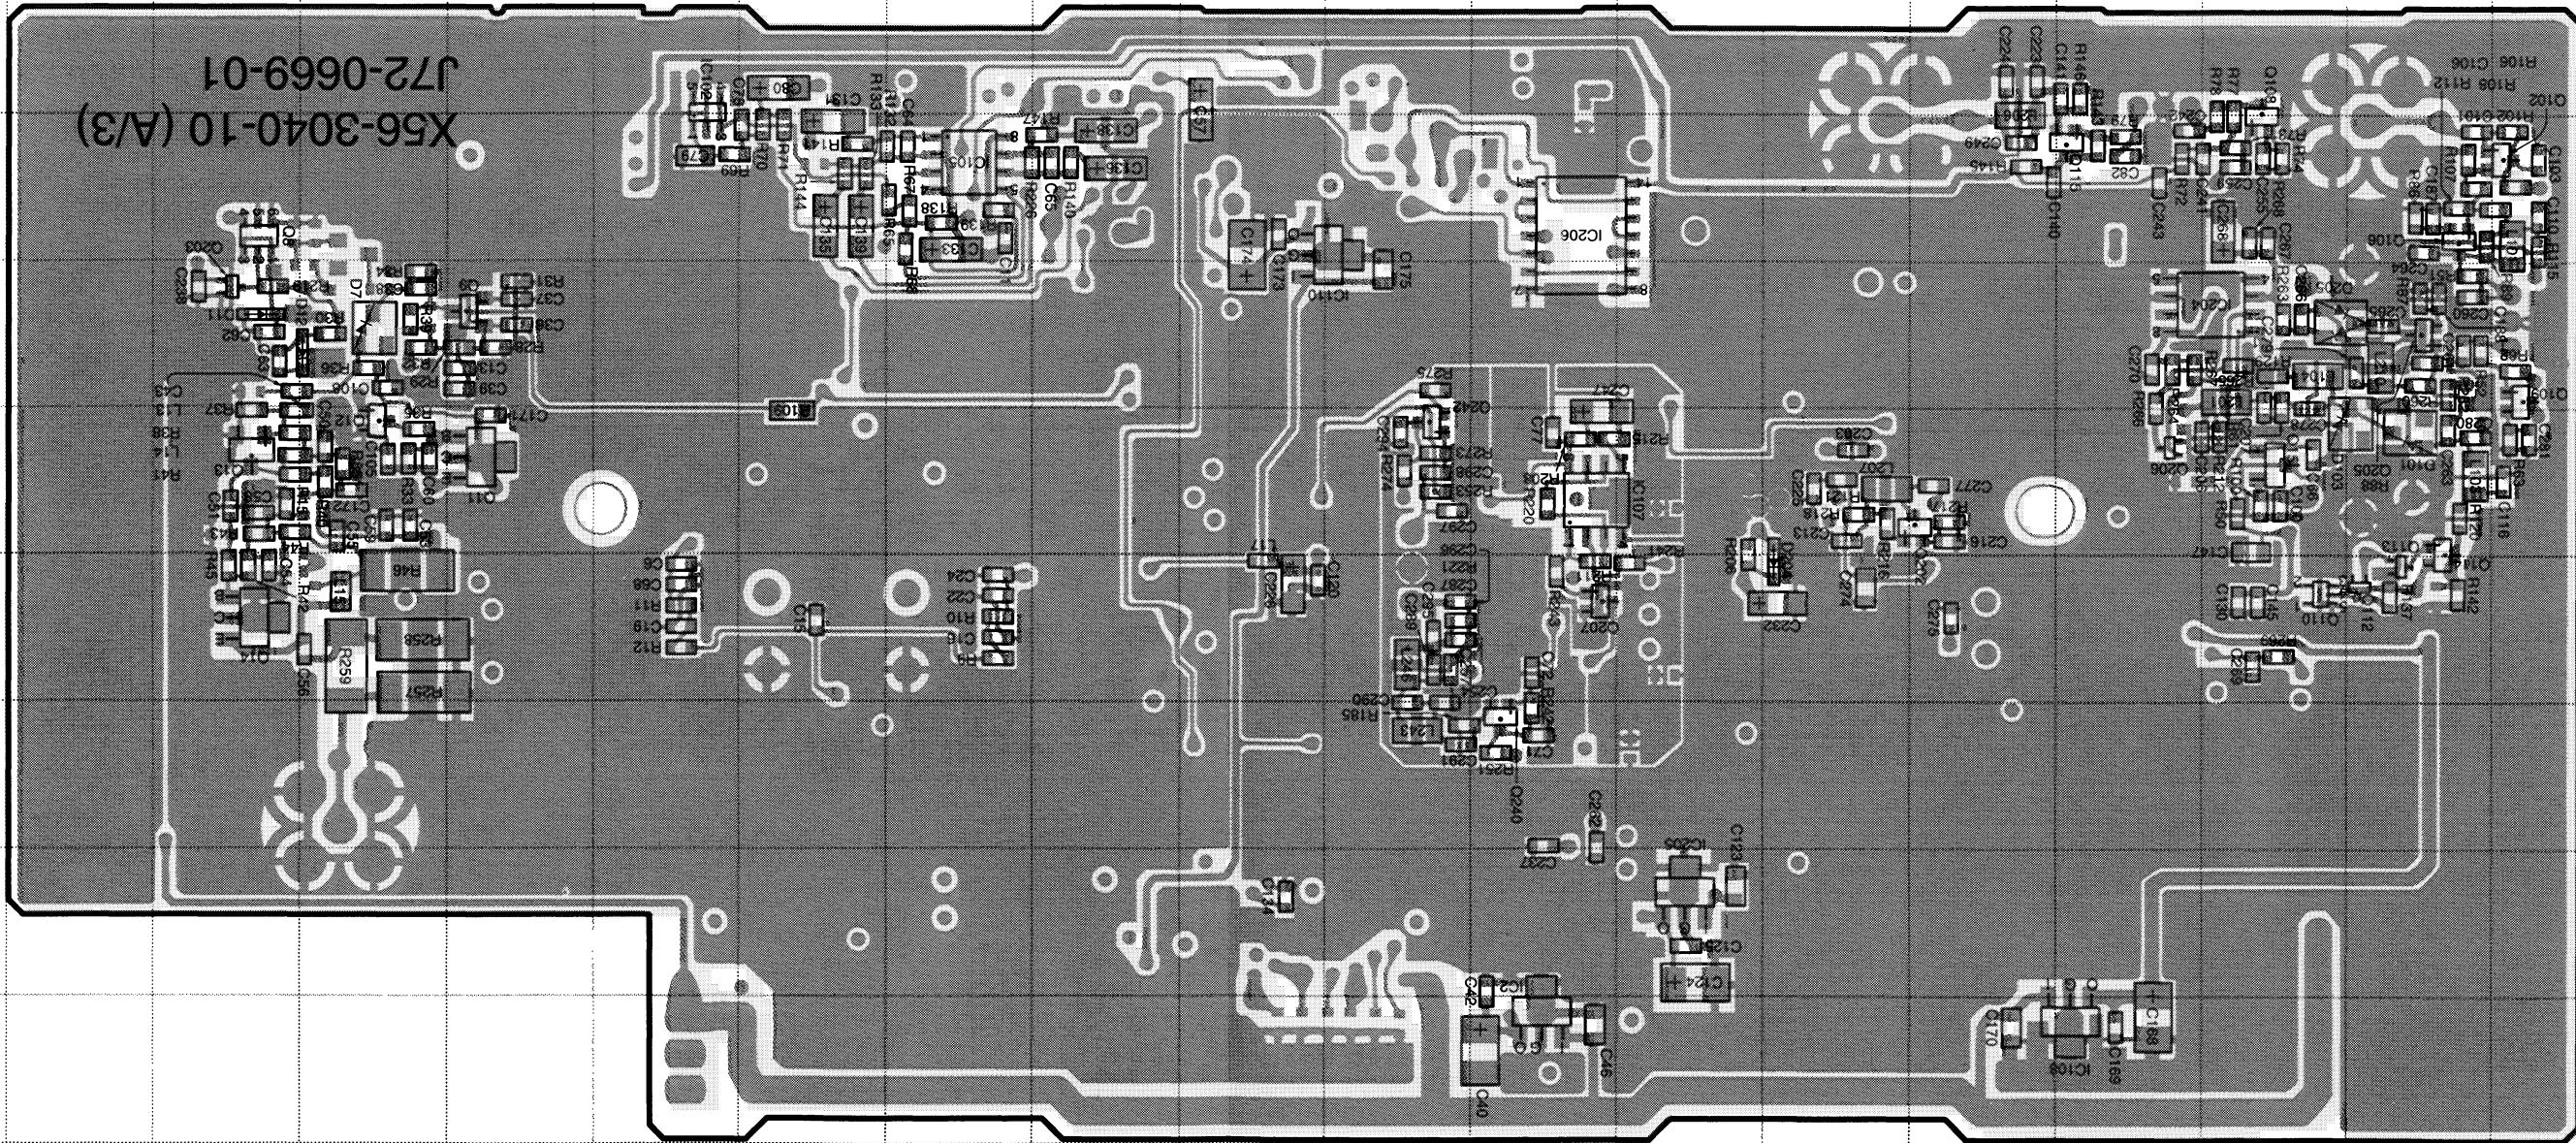


Foil Side View
TX UNIT (X56-3040-10) (A/3)

Ref. No.	Address
D12	8P
I1C02	9H
I1C03	9L
I1C04	9C
I1C05	9B
I1C06	9B
I1C07	7H
I1C08	7B
I1C09	7B
I1C10	7B
I1C11	6C
I1C12	6B
I1C13	6B
I1C14	7B
I1C20	8D
I1C205	4G
I1C206	9H
I1C207	7E
I1C208	8A
I1C209	8A
I1C101	7B
I1C102	10N
I1C103	9C
I1C104	9B
I1C105	9B
I1C106	8P
I1C107	9H
I1C108	7H
I1C109	7B
I1C110	7B
I1C111	6C
I1C112	6B
I1C113	6B
I1C114	7B
I1C115	9D
I1C116	9D
I1C117	7B
I1C118	7B
I1C119	7B
I1C120	7B
I1C121	7B
I1C122	7B
I1C123	7B
I1C124	7B
I1C125	7B
I1C126	7B
I1C127	7B
I1C128	7B
I1C129	7B
I1C130	7B
I1C131	7B
I1C132	7B
I1C133	7B
I1C134	7B
I1C135	7B
I1C136	7B
I1C137	7B
I1C138	7B
I1C139	7B
I1C140	7B
I1C141	7B
I1C142	7B
I1C143	7B
I1C144	7B
I1C145	7B
I1C146	7B
I1C147	7B
I1C148	7B
I1C149	7B
I1C150	7B
I1C151	7B
I1C152	7B
I1C153	7B
I1C154	7B
I1C155	7B
I1C156	7B
I1C157	7B
I1C158	7B
I1C159	7B
I1C160	7B
I1C161	7B
I1C162	7B
I1C163	7B
I1C164	7B
I1C165	7B
I1C166	7B
I1C167	7B
I1C168	7B
I1C169	7B
I1C170	7B
I1C171	7B
I1C172	7B
I1C173	7B
I1C174	7B
I1C175	7B
I1C176	7B
I1C177	7B
I1C178	7B
I1C179	7B
I1C180	7B
I1C181	7B
I1C182	7B
I1C183	7B
I1C184	7B
I1C185	7B
I1C186	7B
I1C187	7B
I1C188	7B
I1C189	7B
I1C190	7B
I1C191	7B
I1C192	7B
I1C193	7B
I1C194	7B
I1C195	7B
I1C196	7B
I1C197	7B
I1C198	7B
I1C199	7B
I1C200	7B
I1C201	7B
I1C202	7B
I1C203	7B
I1C204	7B
I1C205	7B
I1C206	7B
I1C207	7B
I1C208	7B
I1C209	7B
I1C210	7B
I1C211	7B
I1C212	7B
I1C213	7B
I1C214	7B
I1C215	7B
I1C216	7B
I1C217	7B
I1C218	7B
I1C219	7B
I1C220	7B
I1C221	7B
I1C222	7B
I1C223	7B
I1C224	7B
I1C225	7B
I1C226	7B
I1C227	7B
I1C228	7B
I1C229	7B
I1C230	7B
I1C231	7B
I1C232	7B
I1C233	7B
I1C234	7B
I1C235	7B
I1C236	7B
I1C237	7B
I1C238	7B
I1C239	7B
I1C240	7B
I1C241	7B
I1C242	7B
I1C243	7B
I1C244	7B
I1C245	7B
I1C246	7B
I1C247	7B
I1C248	7B
I1C249	7B
I1C250	7B
I1C251	7B
I1C252	7B
I1C253	7B
I1C254	7B
I1C255	7B
I1C256	7B
I1C257	7B
I1C258	7B
I1C259	7B
I1C260	7B
I1C261	7B
I1C262	7B
I1C263	7B
I1C264	7B
I1C265	7B
I1C266	7B
I1C267	7B
I1C268	7B
I1C269	7B
I1C270	7B
I1C271	7B
I1C272	7B
I1C273	7B
I1C274	7B
I1C275	7B
I1C276	7B
I1C277	7B
I1C278	7B
I1C279	7B
I1C280	7B
I1C281	7B
I1C282	7B
I1C283	7B
I1C284	7B
I1C285	7B
I1C286	7B
I1C287	7B
I1C288	7B
I1C289	7B
I1C290	7B
I1C291	7B
I1C292	7B
I1C293	7B
I1C294	7B
I1C295	7B
I1C296	7B
I1C297	7B
I1C298	7B
I1C299	7B
I1C300	7B
I1C301	7B
I1C302	7B
I1C303	7B
I1C304	7B
I1C305	7B
I1C306	7B
I1C307	7B
I1C308	7B
I1C309	7B
I1C310	7B
I1C311	7B
I1C312	7B
I1C313	7B
I1C314	7B
I1C315	7B
I1C316	7B
I1C317	7B
I1C318	7B
I1C319	7B
I1C320	7B
I1C321	7B
I1C322	7B
I1C323	7B
I1C324	7B
I1C325	7B
I1C326	7B
I1C327	7B
I1C328	7B
I1C329	7B
I1C330	7B
I1C331	7B
I1C332	7B
I1C333	7B
I1C334	7B
I1C335	7B
I1C336	7B
I1C337	7B
I1C338	7B
I1C339	7B
I1C340	7B
I1C341	7B
I1C342	7B
I1C343	7B
I1C344	7B
I1C345	7B
I1C346	7B
I1C347	7B
I1C348	7B
I1C349	7B
I1C350	7B
I1C351	7B
I1C352	7B
I1C353	7B
I1C354	7B
I1C355	7B
I1C356	7B
I1C357	7B
I1C358	7B
I1C359	7B
I1C360	7B
I1C361	7B
I1C362	7B
I1C363	7B
I1C364	7B
I1C365	7B
I1C366	7B
I1C367	7B
I1C368	7B
I1C369	7B
I1C370	7B
I1C371	7B
I1C372	7B
I1C373	7B
I1C374	7B
I1C375	7B
I1C376	7B
I1C377	7B
I1C378	7B
I1C379	7B
I1C380	7B
I1C381	7B
I1C382	7B
I1C383	7B
I1C384	7B
I1C385	7B
I1C386	7B
I1C387	7B
I1C388	7B
I1C389	7B
I1C390	7B
I1C391	7B
I1C392	7B
I1C393	7B
I1C394	7B
I1C395	7B
I1C396	7B
I1C397	7B
I1C398	7B
I1C399	7B
I1C400	7B
I1C401	7B
I1C402	7B
I1C403	7B
I1C404	7B
I1C405	7B
I1C406	7B
I1C407	7B
I1C408	7B
I1C409	7B
I1C410	7B
I1C411	7B
I1C412	7B
I1C413	7B
I1C414	7B
I1C415	7B
I1C416	7B
I1C417	7B
I1C418	7B
I1C419	7B
I1C420	7B</


TKR-740 PC BOARD VIEW

TX UNIT (X56-3040-10) (A3) Component Side + Foil Side View

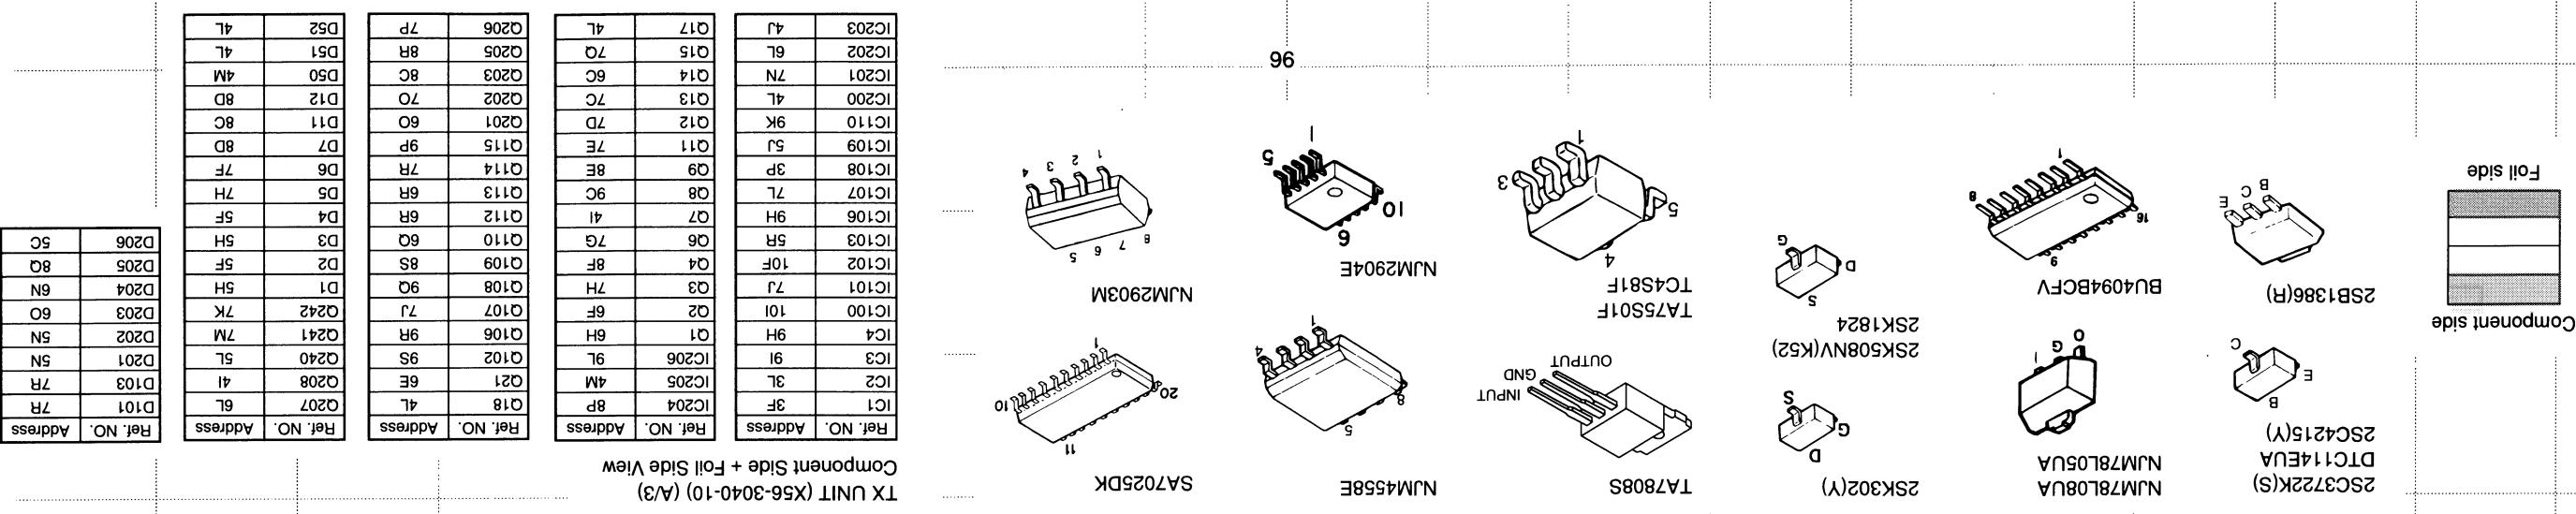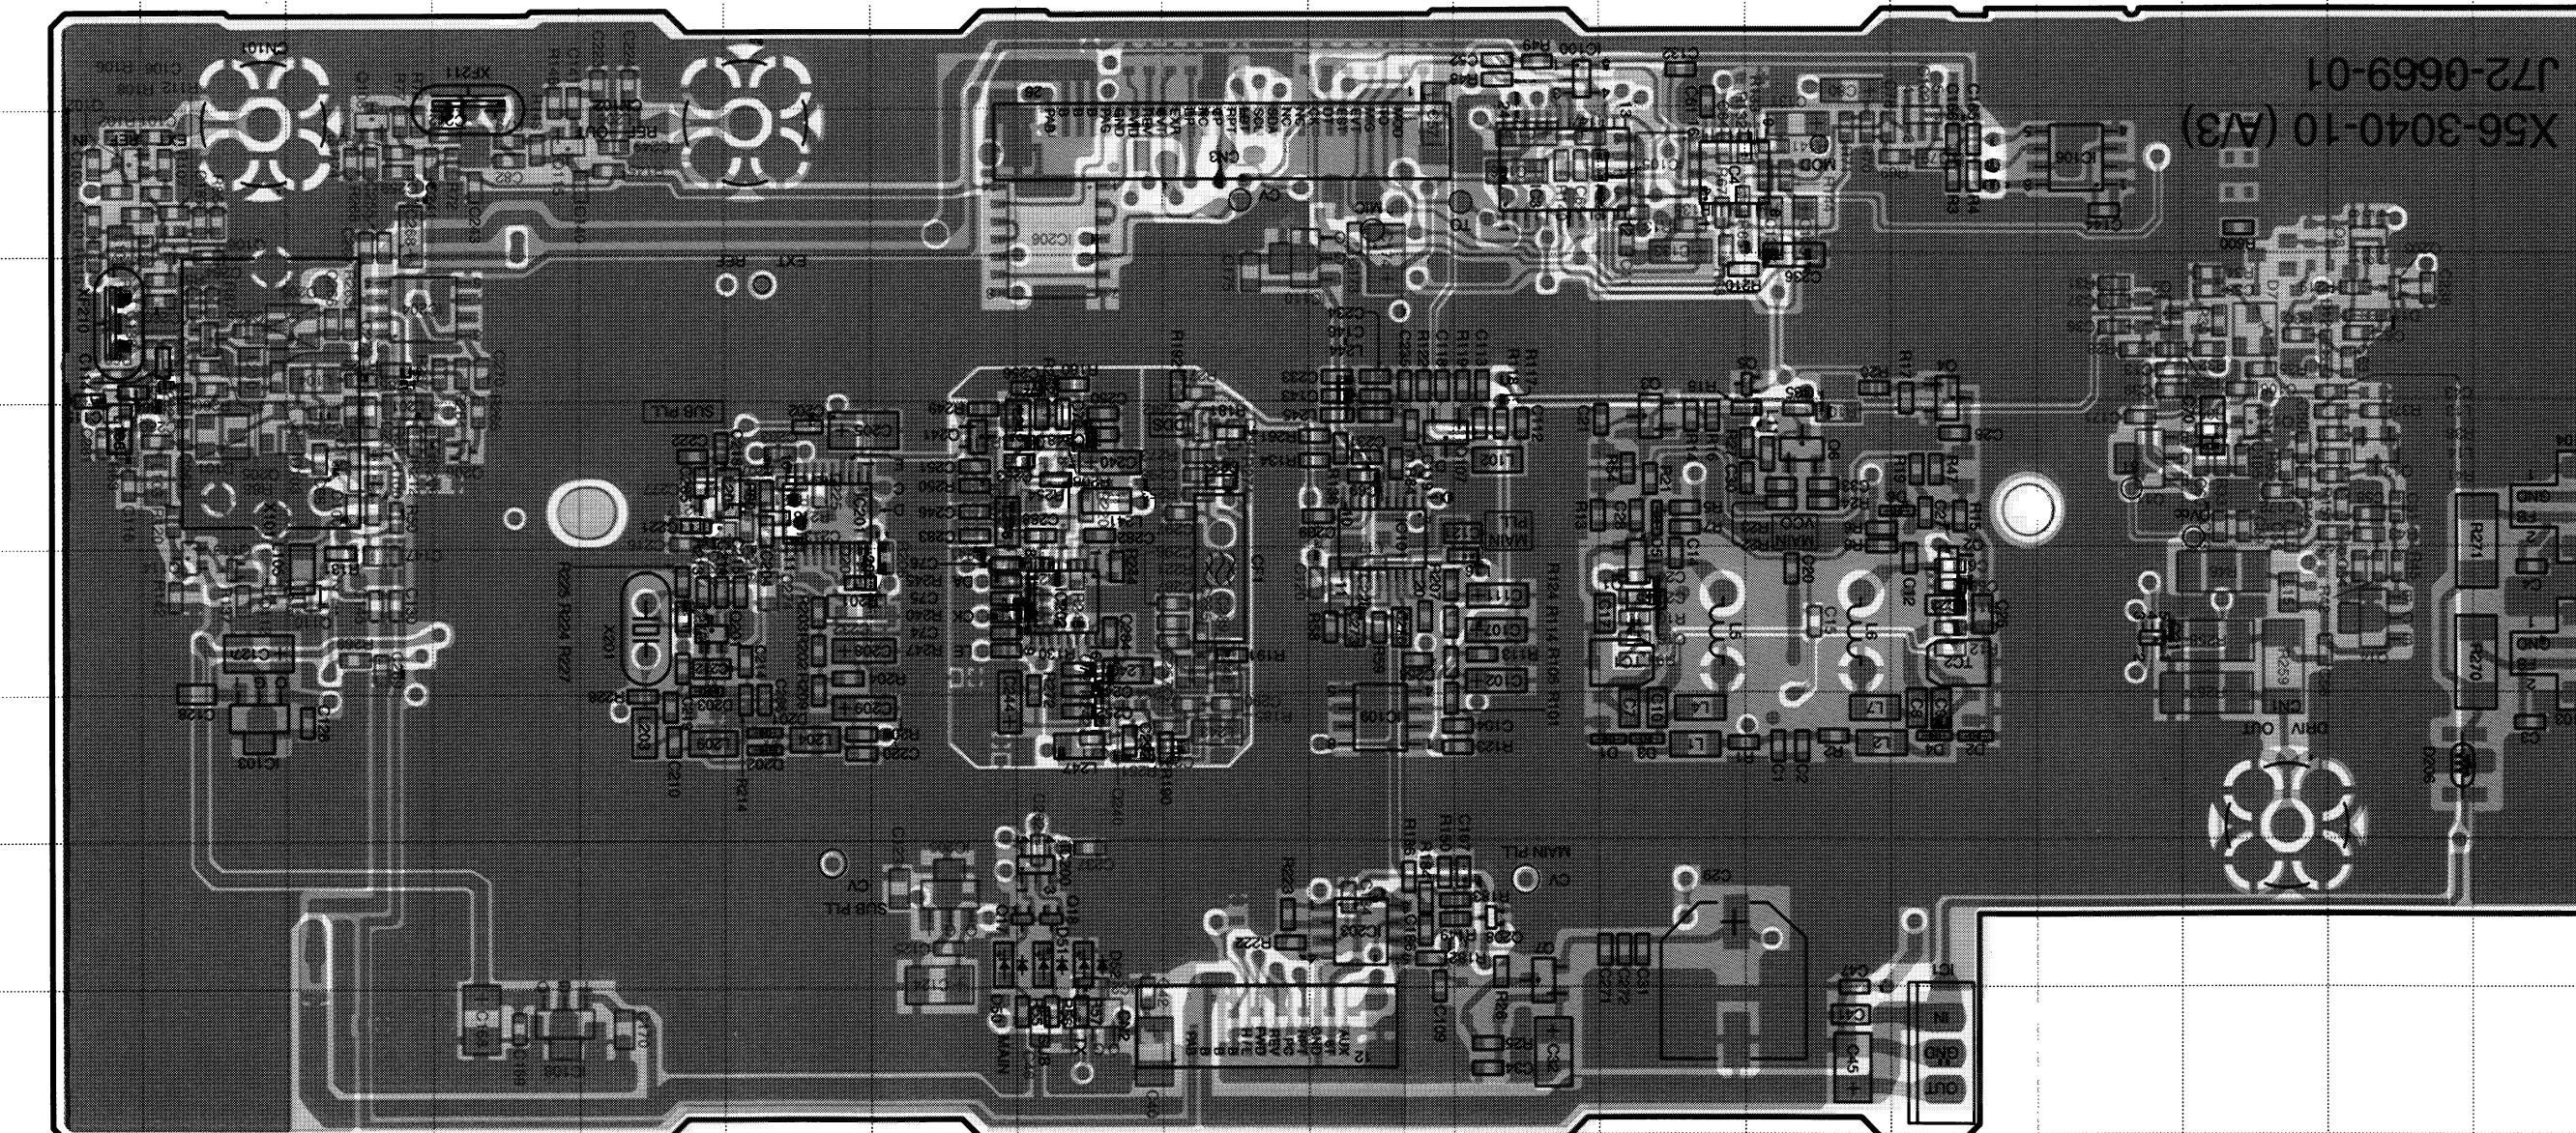


TKR-740 PC BOARD VIEW

TX UNIT (X56-3040-10) (B/3) (C/3) Foil Side View

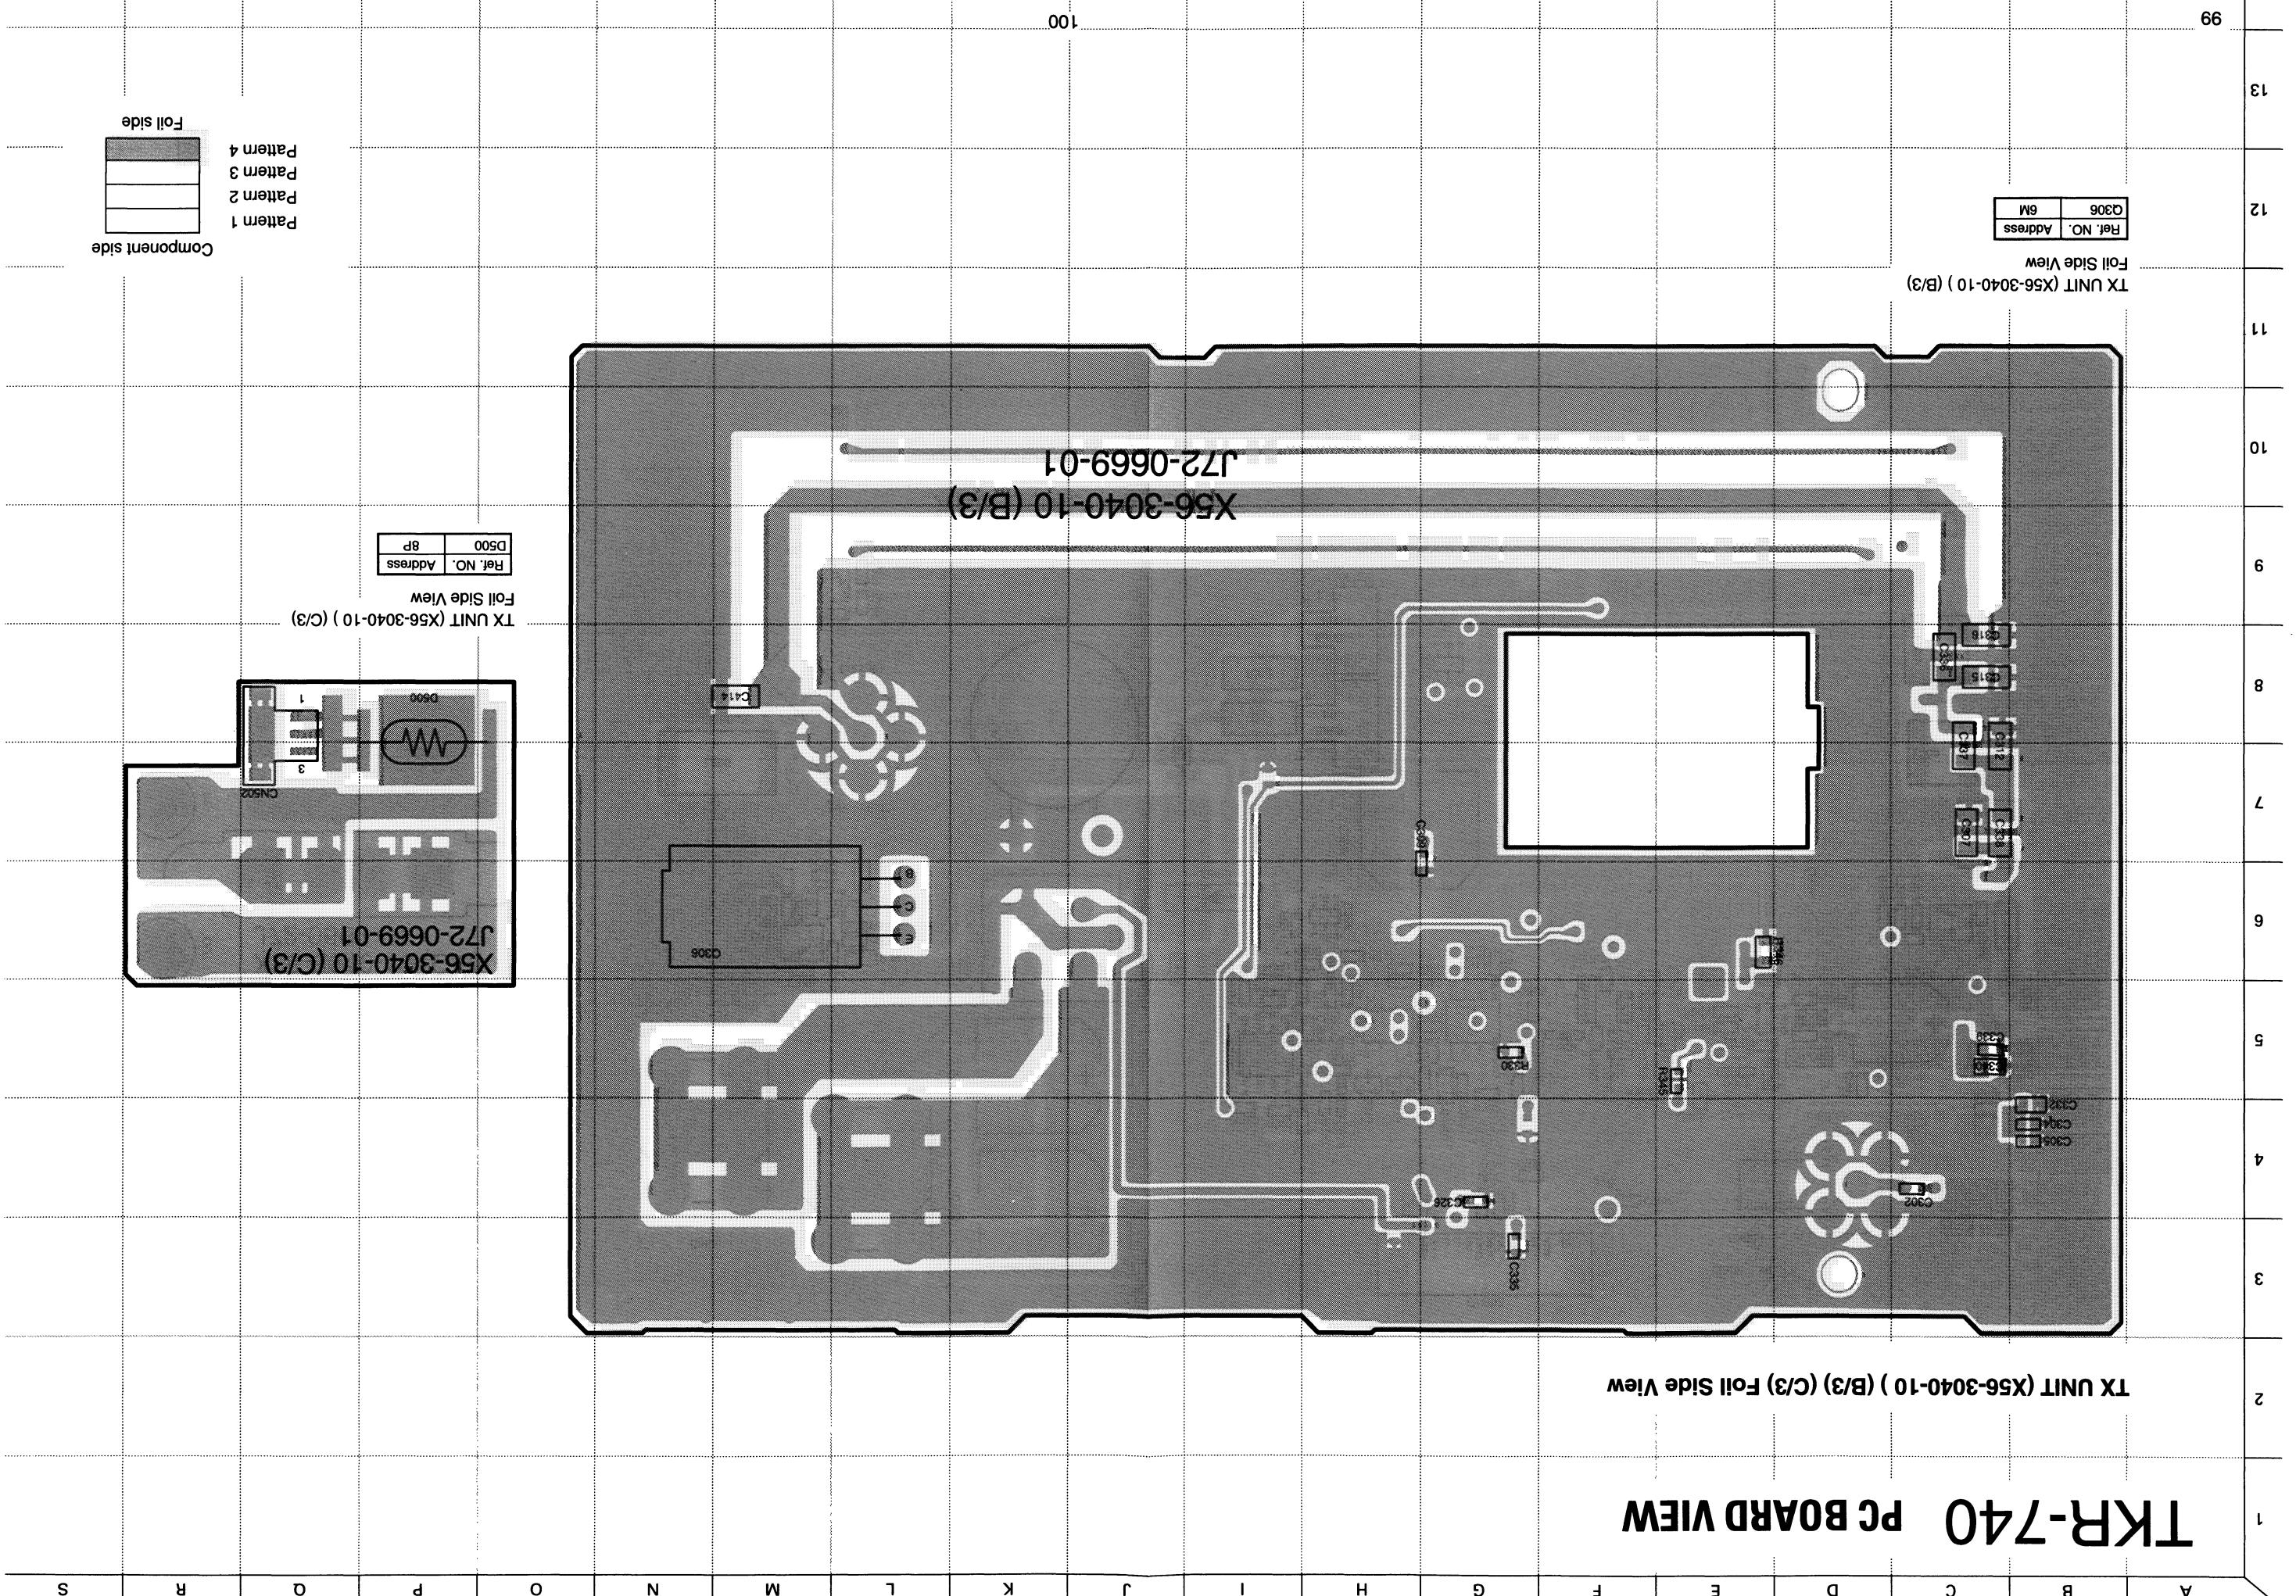

PC BOARD VIEW TKR-740

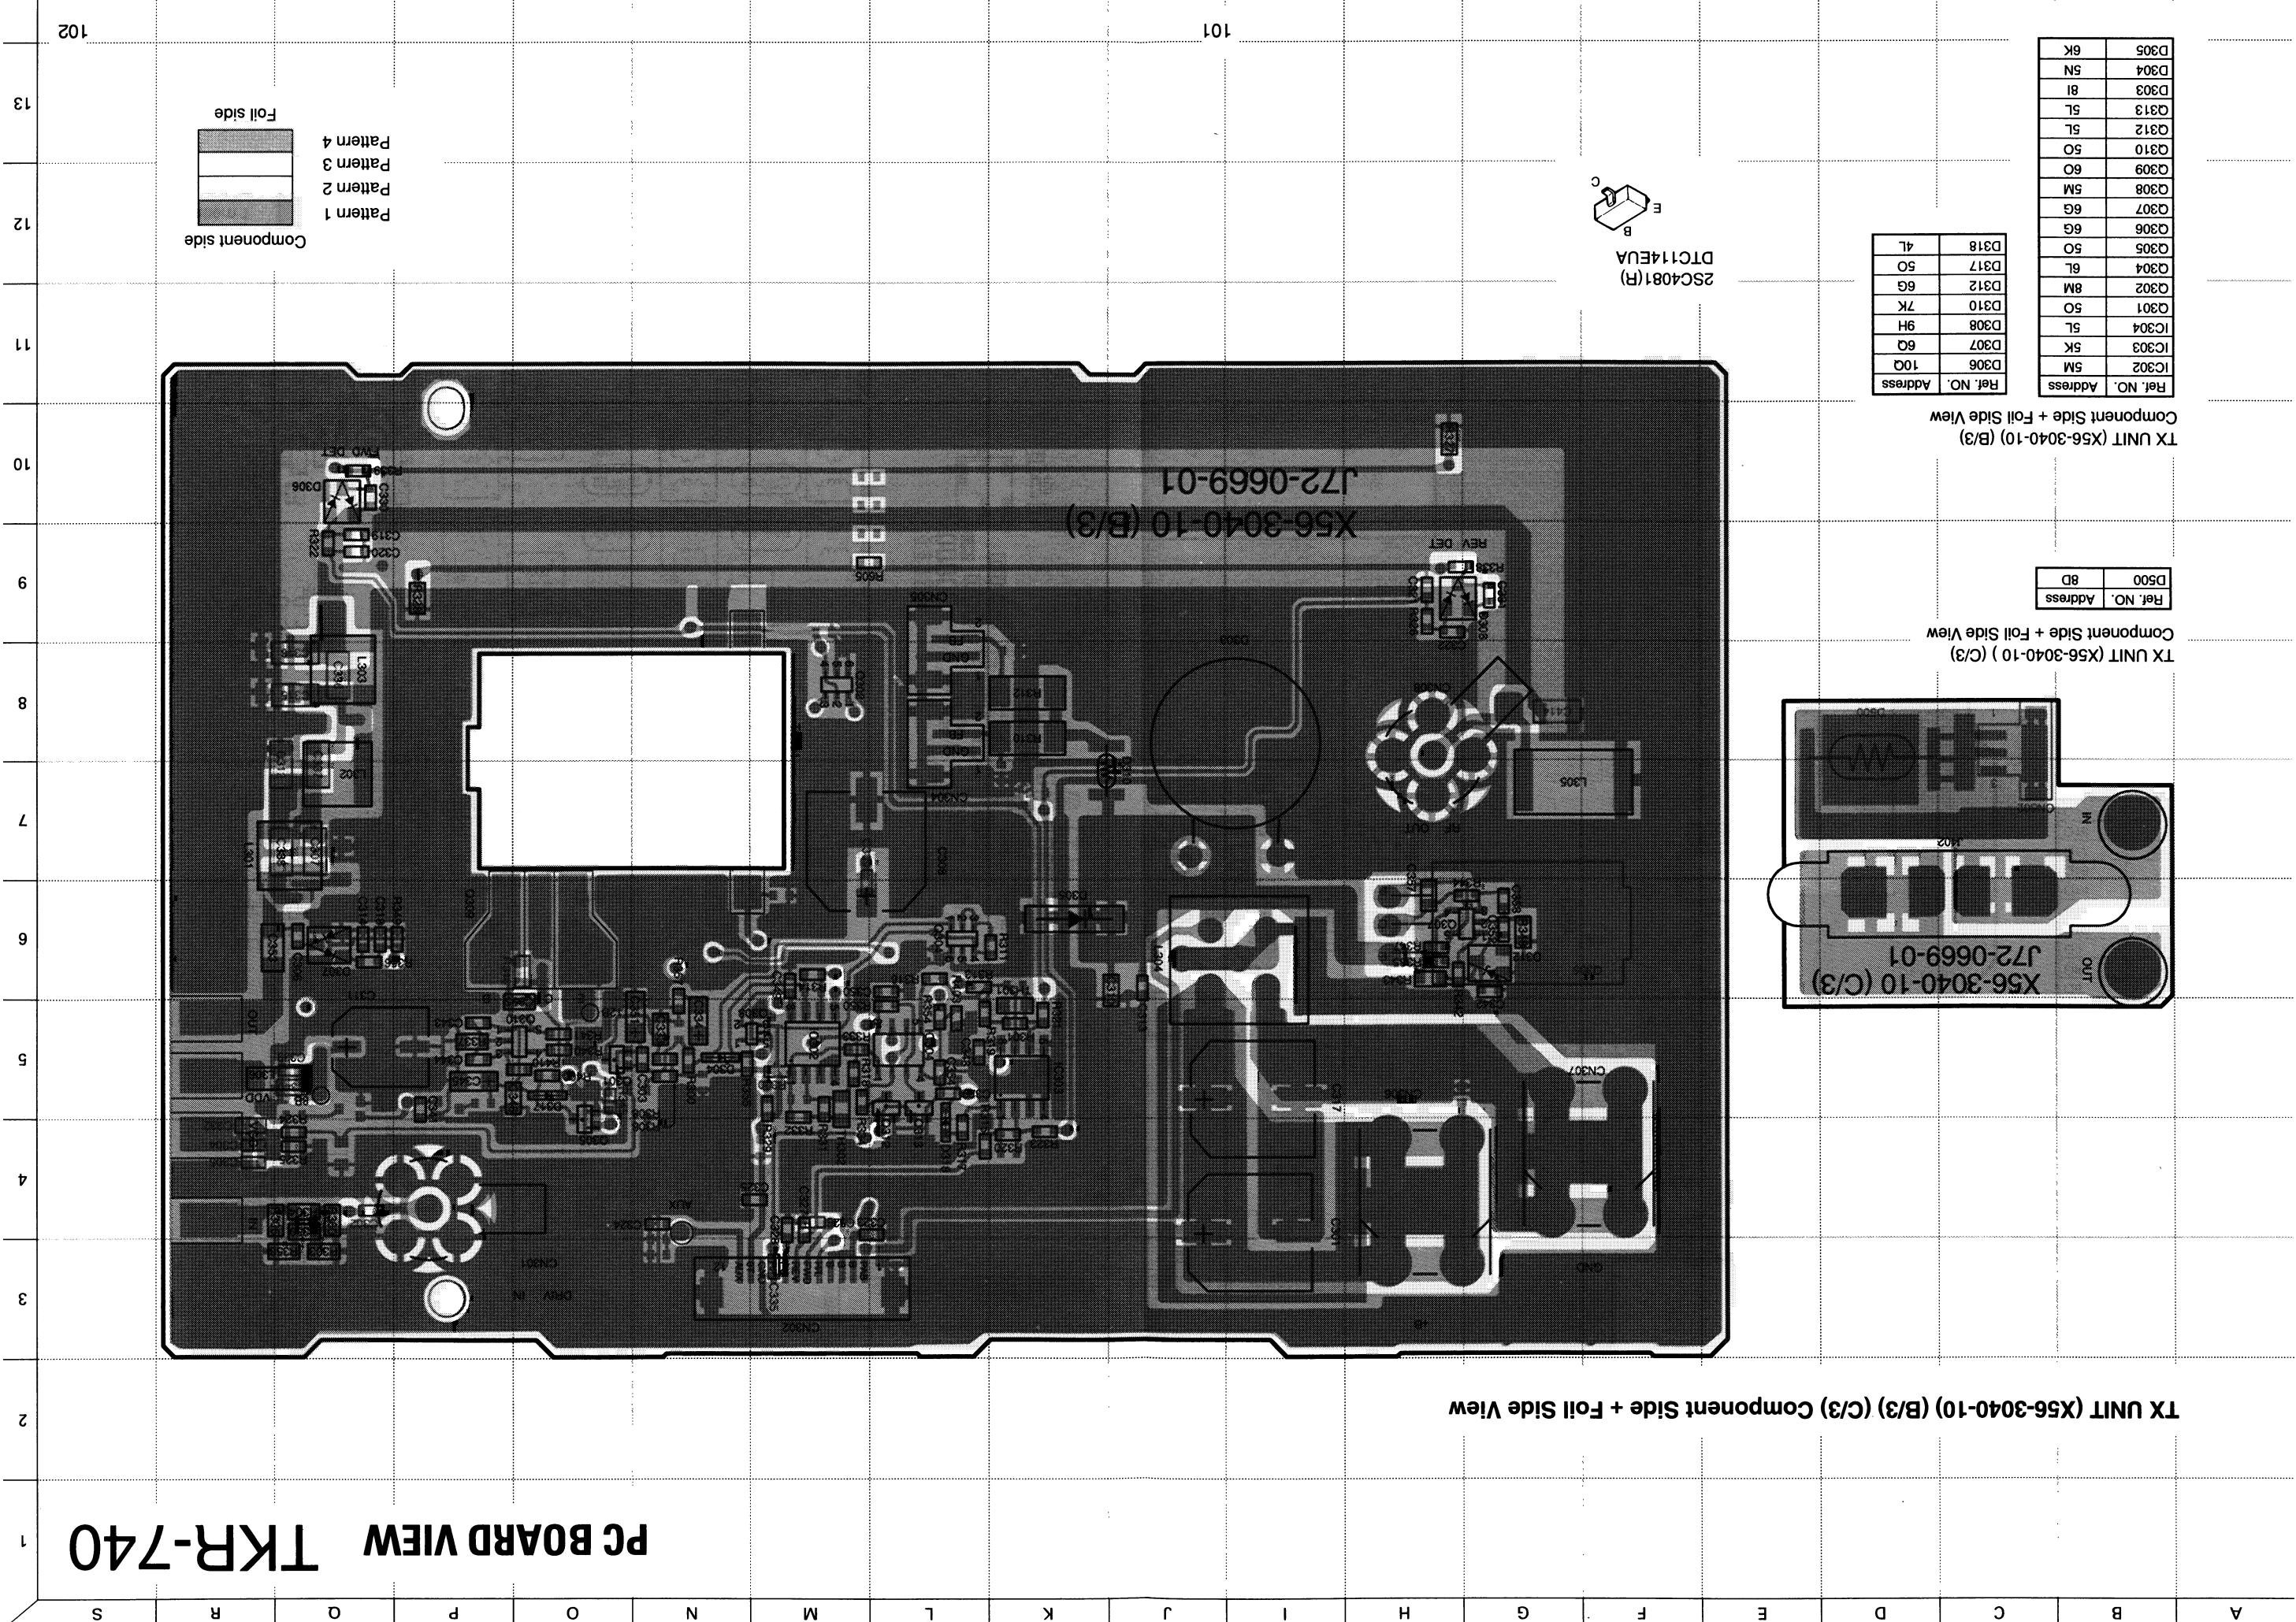

TKR-740 PC BOARD VIEW

RX UNIT (X55-3050-XX) Component Side View

RX UNIT (X55-3050-XX)
Component Side View

Ref. No.	Address
I02	3J
I03	4D
I04	3N
I05	6B
I06	7B
I07	8D
I08	5D
I09	4G
I10	4L
I11	4C
I12	7I
I13	6J
I14	6K
I15	6H
I16	5E
I17	4N
I18	7J
I19	7L
I20	7K
I21	7L
I22	6J
I23	6K
I24	4E
I25	7G
I26	7G
I27	7I
I28	8H
I29	8H
I30	4E
I31	1C16
I32	1C15
I33	1C14
I34	1C13
I35	1C12
I36	1C11
I37	1C10
I38	1C9
I39	1C8
I40	1C7
I41	1C6
I42	1C5
I43	1C4
I44	1C3
I45	1C2
I46	1C1
I47	1C0
I48	1C9
I49	1C8
I50	1C7
I51	1C6
I52	1C5
I53	1C4
I54	1C3
I55	1C2
I56	1C1
I57	1C0
I58	1C9
I59	1C8
I60	1C7
I61	1C6
I62	1C5
I63	1C4
I64	1C3
I65	1C2
I66	1C1
I67	1C0
I68	1C9
I69	1C8
I70	1C7
I71	1C6
I72	1C5
I73	1C4
I74	1C3
I75	1C2
I76	1C1
I77	1C0
I78	1C9
I79	1C8
I80	1C7
I81	1C6
I82	1C5
I83	1C4
I84	1C3
I85	1C2
I86	1C1
I87	1C0
I88	1C9
I89	1C8
I90	1C7
I91	1C6
I92	1C5
I93	1C4
I94	1C3
I95	1C2
I96	1C1
I97	1C0
I98	1C9
I99	1C8
I100	1C7
I101	1C6
I102	1C5
I103	1C4
I104	1C3
I105	1C2
I106	1C1
I107	1C0
I108	1C9
I109	1C8
I110	1C7
I111	1C6
I112	1C5
I113	1C4
I114	1C3
I115	1C2
I116	1C1
I117	1C0
I118	1C9
I119	1C8
I120	1C7
I121	1C6
I122	1C5
I123	1C4
I124	1C3
I125	1C2
I126	1C1
I127	1C0
I128	1C9
I129	1C8
I130	1C7
I131	1C6
I132	1C5
I133	1C4
I134	1C3
I135	1C2
I136	1C1
I137	1C0
I138	1C9
I139	1C8
I140	1C7
I141	1C6
I142	1C5
I143	1C4
I144	1C3
I145	1C2
I146	1C1
I147	1C0
I148	1C9
I149	1C8
I150	1C7
I151	1C6
I152	1C5
I153	1C4
I154	1C3
I155	1C2
I156	1C1
I157	1C0
I158	1C9
I159	1C8
I160	1C7
I161	1C6
I162	1C5
I163	1C4
I164	1C3
I165	1C2
I166	1C1
I167	1C0
I168	1C9
I169	1C8
I170	1C7
I171	1C6
I172	1C5
I173	1C4
I174	1C3
I175	1C2
I176	1C1
I177	1C0
I178	1C9
I179	1C8
I180	1C7
I181	1C6
I182	1C5
I183	1C4
I184	1C3
I185	1C2
I186	1C1
I187	1C0
I188	1C9
I189	1C8
I190	1C7
I191	1C6
I192	1C5
I193	1C4
I194	1C3
I195	1C2
I196	1C1
I197	1C0
I198	1C9
I199	1C8
I200	1C7
I201	1C6
I202	1C5
I203	1C4
I204	1C3
I205	1C2
I206	1C1
I207	1C0
I208	1C9
I209	1C8
I210	1C7
I211	1C6
I212	1C5
I213	1C4
I214	1C3
I215	1C2
I216	1C1
I217	1C0
I218	1C9
I219	1C8
I220	1C7
I221	1C6
I222	1C5
I223	1C4
I224	1C3
I225	1C2
I226	1C1
I227	1C0
I228	1C9
I229	1C8
I230	1C7
I231	1C6
I232	1C5
I233	1C4
I234	1C3
I235	1C2
I236	1C1
I237	1C0
I238	1C9
I239	1C8
I240	1C7
I241	1C6
I242	1C5
I243	1C4
I244	1C3
I245	1C2
I246	1C1
I247	1C0
I248	1C9
I249	1C8
I250	1C7
I251	1C6
I252	1C5
I253	1C4
I254	1C3
I255	1C2
I256	1C1
I257	1C0
I258	1C9
I259	1C8
I260	1C7
I261	1C6
I262	1C5
I263	1C4
I264	1C3
I265	1C2
I266	1C1
I267	1C0
I268	1C9
I269	1C8
I270	1C7
I271	1C6
I272	1C5
I273	1C4
I274	1C3
I275	1C2
I276	1C1
I277	1C0
I278	1C9
I279	1C8
I280	1C7
I281	1C6
I282	1C5
I283	1C4
I284	1C3
I285	1C2
I286	1C1
I287	1C0
I288	1C9
I289	1C8
I290	1C7
I291	1C6
I292	1C5
I293	1C4
I294	1C3
I295	1C2
I296	1C1
I297	1C0
I298	1C9
I299	1C8
I300	1C7
I301	1C6
I302	1C5
I303	1C4
I304	1C3
I305	1C2
I306	1C1
I307	1C0
I308	1C9
I309	1C8
I310	1C7
I311	1C6
I312	1C5
I313	1C4
I314	1C3
I315	1C2
I316	1C1
I317	1C0
I318	1C9
I319	1C8
I320	1C7
I321	1C6
I322	1C5
I323	1C4
I324	1C3
I325	1C2
I326	1C1
I327	1C0
I328	1C9
I329	1C8
I330	1C7
I331	1C6
I332	1C5
I333	1C4
I334	1C3
I335	1C2
I336	1C1
I337	1C0
I338	1C9
I339	1C8
I340	1C7
I341	1C6
I342	1C5
I343	1C4
I344	1C3
I345	1C2
I346	1C1
I347	1C0
I348	1C9
I349	1C8
I350	1C7
I351	1C6
I352	1C5
I353	1C4
I354	1C3
I355	1C2
I356	1C1
I357	1C0
I358	1C9
I359	1C8
I360	1C7
I361	1C6
I362	1C5
I363	1C4
I364	1C3
I365	1C2
I366	1C1
I367	1C0
I368	1C9
I369	1C8
I370	1C7
I371	1C6
I372	1C5
I373	1C4
I374	1C3
I3	

RX UNIT (X55-3050-XX) Foil Side View



Foil Side View
RX UNIT (X55-3050-XX)

Ref. No.	Address
I01	6J
I08	100
I011	3J
I010	100
I08	6N
I012	8P
I017	10D
I018	7O
I019	4H
I021	9E
I07	9P
I024	10L
I031	3I
I030	3I
I031	10N
I032	9N
I033	6L
I035	9O
I036	6P
I037	6P
I038	6P
I039	6P
I040	6P
I043	6L
I045	9O
I046	6P
I047	6P
I048	6P
I049	6P
I050	6P
I051	6P
I052	6P
I053	6P
I054	6P
I055	6P
I056	6P
I057	6P
I058	6P
I059	6P
I060	6P
I061	6P
I062	6P
I063	6P
I064	6P
I065	6P
I066	6P
I067	6P
I068	6P
I069	6P
I070	6P
I071	6P
I072	6P
I073	6P
I074	6P
I075	6P
I076	6P
I077	6P
I078	6P
I079	6P
I080	6P
I081	6P
I082	6P
I083	6P
I084	6P
I085	6P
I086	6P
I087	6P
I088	6P
I089	6P
I090	6P
I091	6P
I092	6P
I093	6P
I094	6P
I095	6P
I096	6P
I097	6P
I098	6P
I099	6P
I100	6P
I101	6P
I102	6P
I103	6P
I104	6P
I105	6P
I106	6P
I107	6P
I108	6P
I109	6P
I110	6P
I111	6P
I112	6P
I113	6P
I114	6P
I115	6P
I116	6P
I117	6P
I118	6P
I119	6P
I120	6P
I121	6P
I122	6P
I123	6P
I124	6P
I125	6P
I126	6P
I127	6P
I128	6P
I129	6P
I130	6P
I131	6P
I132	6P
I133	6P
I134	6P
I135	6P
I136	6P
I137	6P
I138	6P
I139	6P
I140	6P
I141	6P
I142	6P
I143	6P
I144	6P
I145	6P
I146	6P
I147	6P
I148	6P
I149	6P
I150	6P
I151	6P
I152	6P
I153	6P
I154	6P
I155	6P
I156	6P
I157	6P
I158	6P
I159	6P
I160	6P
I161	6P
I162	6P
I163	6P
I164	6P
I165	6P
I166	6P
I167	6P
I168	6P
I169	6P
I170	6P
I171	6P
I172	6P
I173	6P
I174	6P
I175	6P
I176	6P
I177	6P
I178	6P
I179	6P
I180	6P
I181	6P
I182	6P
I183	6P
I184	6P
I185	6P
I186	6P
I187	6P
I188	6P
I189	6P
I190	6P
I191	6P
I192	6P
I193	6P
I194	6P
I195	6P
I196	6P
I197	6P
I198	6P
I199	6P
I200	6P
I201	6P
I202	6P
I203	6P
I204	6P
I205	6P
I206	6P
I207	6P
I208	6P
I209	6P
I210	6P
I211	6P
I212	6P
I213	6P
I214	6P
I215	6P
I216	6P
I217	6P
I218	6P
I219	6P
I220	6P
I221	6P
I222	6P
I223	6P
I224	6P
I225	6P
I226	6P
I227	6P
I228	6P
I229	6P
I230	6P
I231	6P
I232	6P
I233	6P
I234	6P
I235	6P
I236	6P
I237	6P
I238	6P
I239	6P
I240	6P
I241	6P
I242	6P
I243	6P
I244	6P
I245	6P
I246	6P
I247	6P
I248	6P
I249	6P
I250	6P
I251	6P
I252	6P
I253	6P
I254	6P
I255	6P
I256	6P
I257	6P
I258	6P
I259	6P
I260	6P
I261	6P
I262	6P
I263	6P
I264	6P
I265	6P
I266	6P
I267	6P
I268	6P
I269	6P
I270	6P
I271	6P
I272	6P
I273	6P
I274	6P
I275	6P
I276	6P
I277	6P
I278	6P
I279	6P
I280	6P
I281	6P
I282	6P
I283	6P
I284	6P
I285	6P
I286	6P
I287	6P
I288	6P
I289	6P
I290	6P
I291	6P
I292	6P
I293	6P
I294	6P
I295	6P
I296	6P
I297	6P
I298	6P
I299	6P
I300	6P
I301	6P
I302	6P
I303	6P
I304	6P
I305	6P
I306	6P
I307	6P
I308	6P
I309	6P
I310	6P
I311	6P
I312	6P
I313	6P
I314	6P
I315	6P
I316	6P
I317	6P
I318	6P
I319	6P
I320	6P
I321	6P
I322	6P
I323	6P
I324	6P
I325	6P
I326	6P
I327	6P
I328	6P
I329	6P
I330	6P
I331	6P
I332	6P
I333	6P
I334	6P
I335	6P
I336	6P
I337	6P
I338	6P
I339	6P
I340	6P
I341	6P
I342	6P
I343	6P
I344	6P
I345	6P
I346	6P
I347	6P
I348	6P
I349	6P
I350	6P
I351	6P
I352	6P
I353	6P
I354	6P
I355	6P
I356	6P
I357	6P
I358	6P
I359	6P
I360	6P
I361	6P
I362	6P
I363	6P
I364	6P
I365	6P
I366	6P
I367	6P
I368	6P
I369	6P
I370	6P
I371	6P
I372	6P
I373	6P
I374	6P
I375	6P
I376	6P
I377	6P
I378	6P
I379	6P
I380	6P
I381	6P
I382	6P
I383	6P
I384	6P
I385	6P
I386	6P
I387	6P
I388	6P
I389	6P
I390	6P
I391	6P
I392	6P
I393	6P
I394	6P
I395	6P
I396	6P
I397	6P
I398	6P
I399	6P
I400	6P
I401	6P
I402	6P
I403	6P
I404	6P
I405	6P
I406	6P
I407	6P
I408	6P
I409	6P</

PC BOARD VIEW TKR-740

RX UNIT (X55-3050-XX) Component Side + Foil Side View

RX UNIT (X55-3050-XX) Component Side + Foil Side View

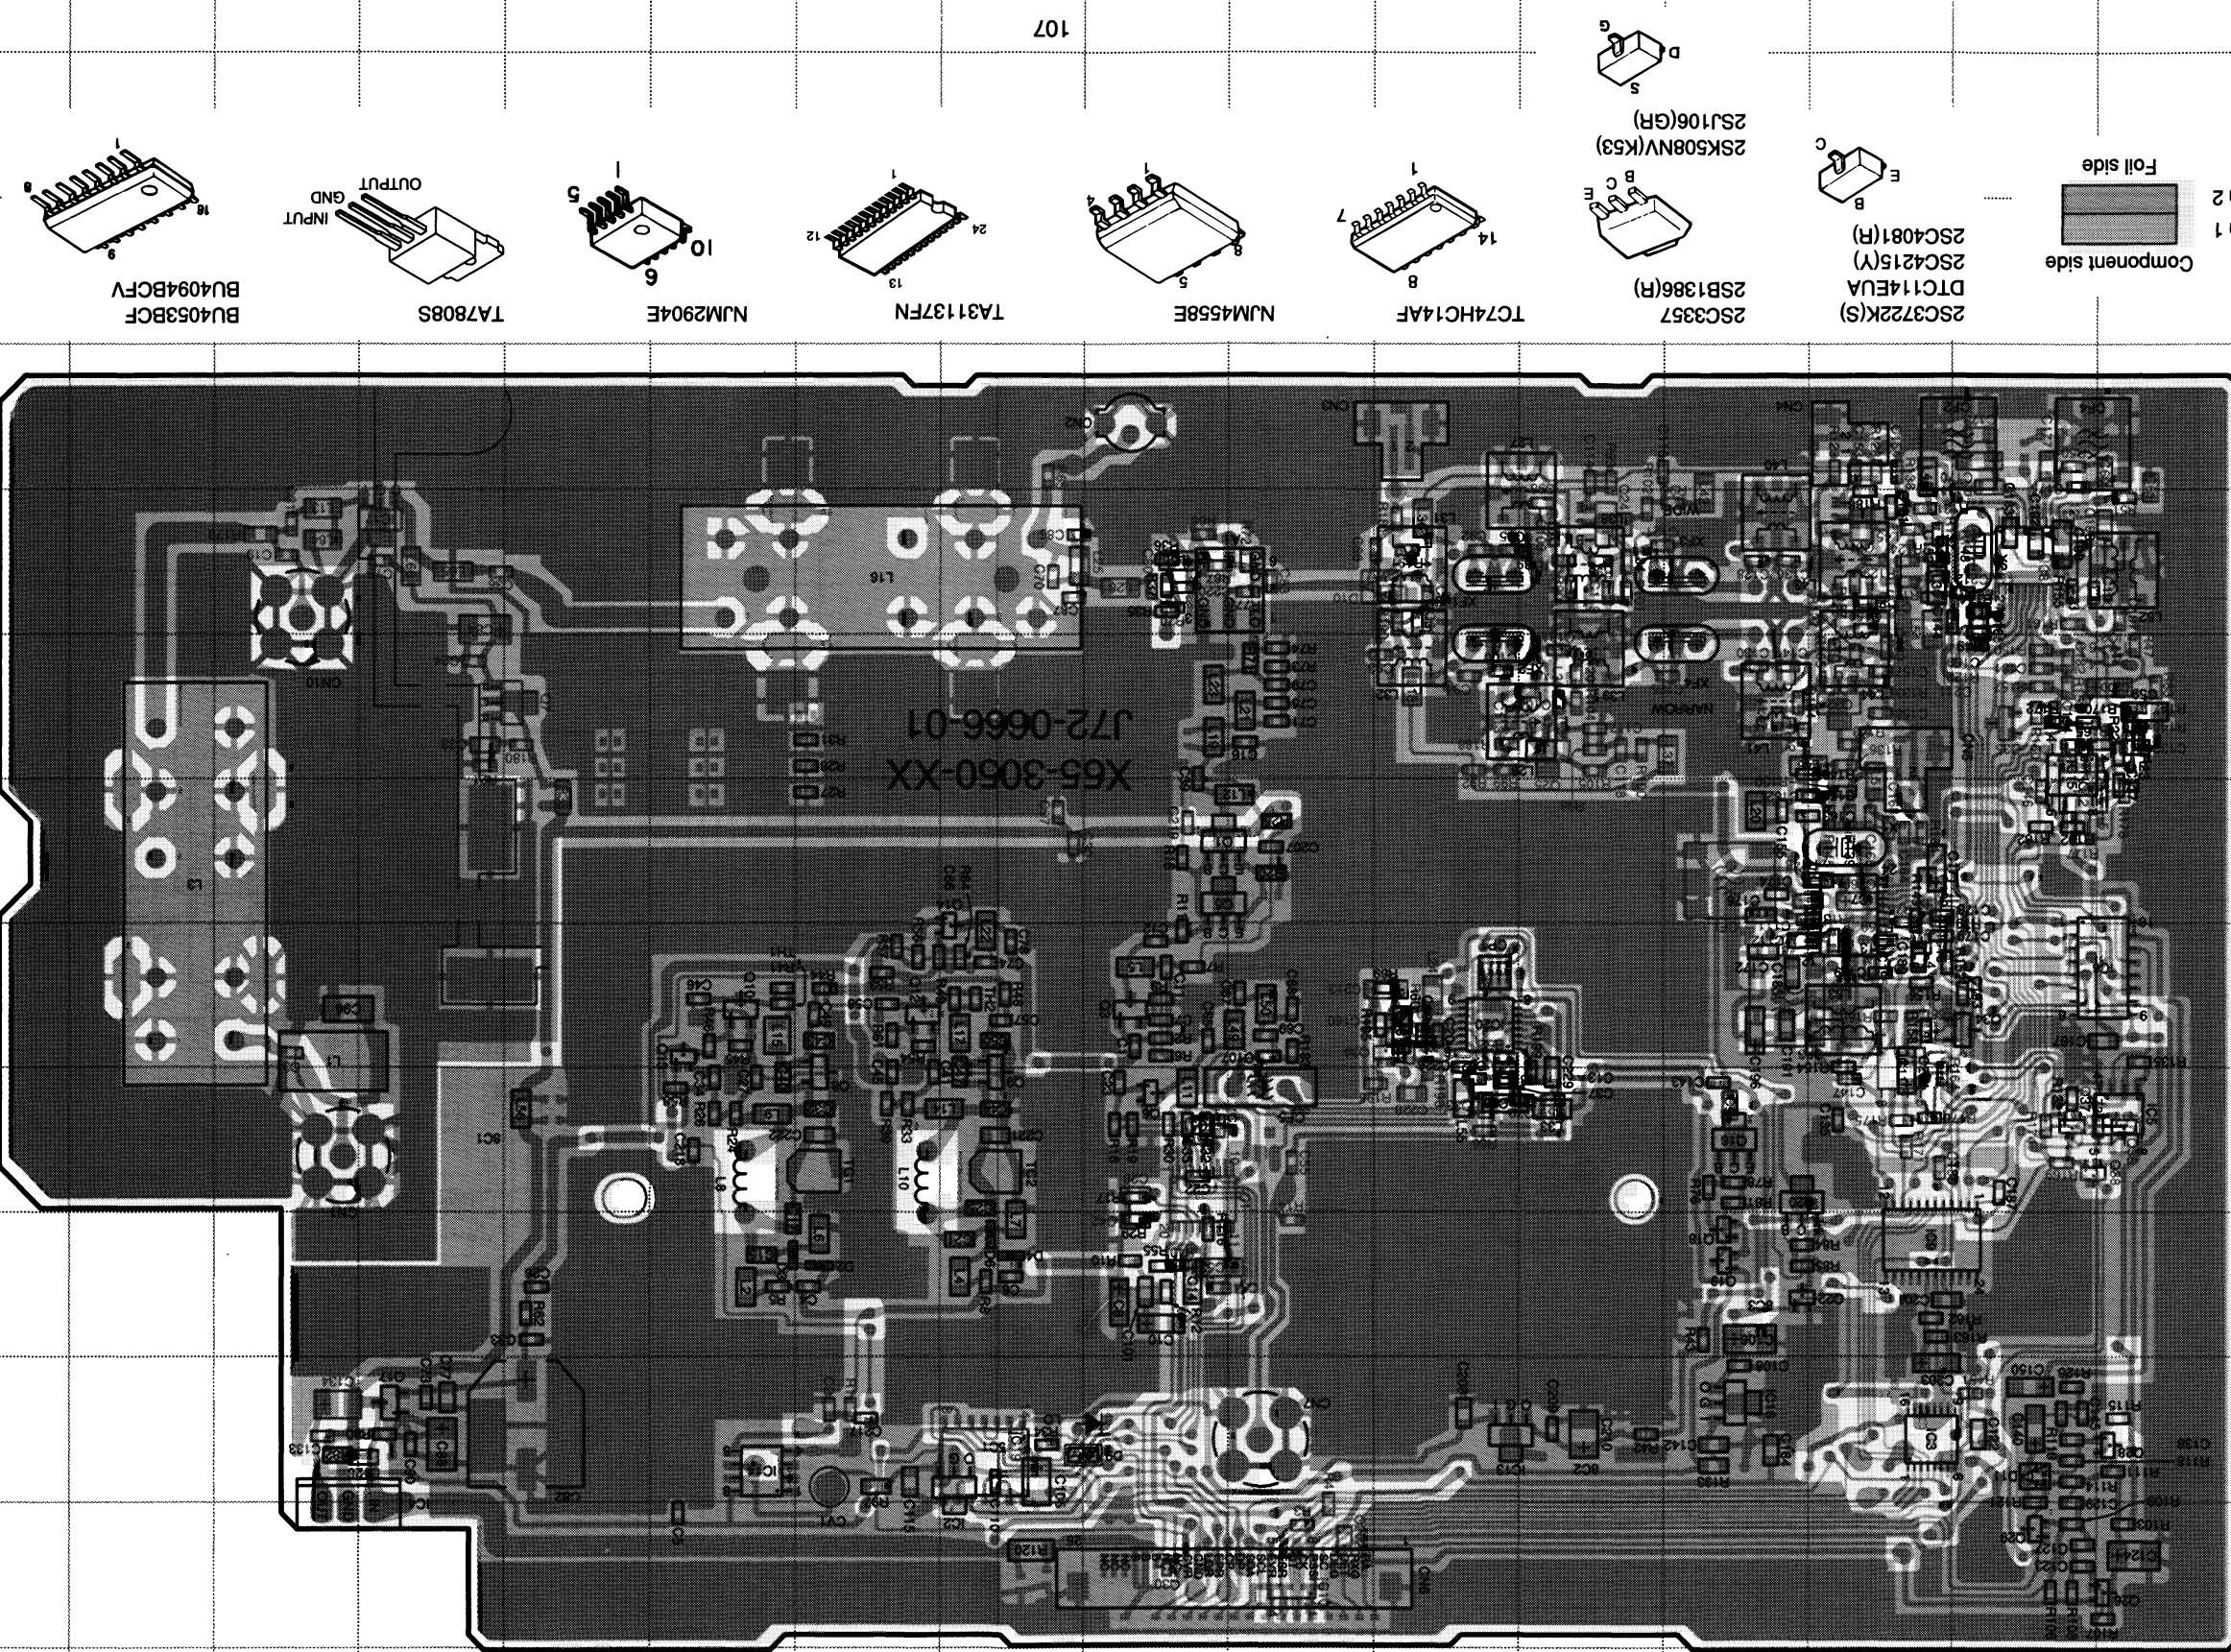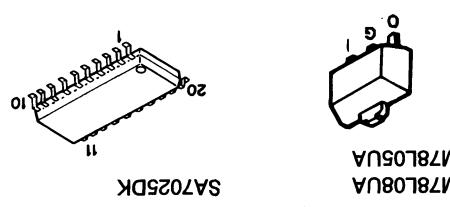

Component side
Pattern 1
Foil side
Pattern 2

Pattern 2

Foil side

Pattern 1

Component side


Foil side

Pattern 2

Component side


Schematic Diagram

X53-3880-10 A/4 CONTROL UNIT

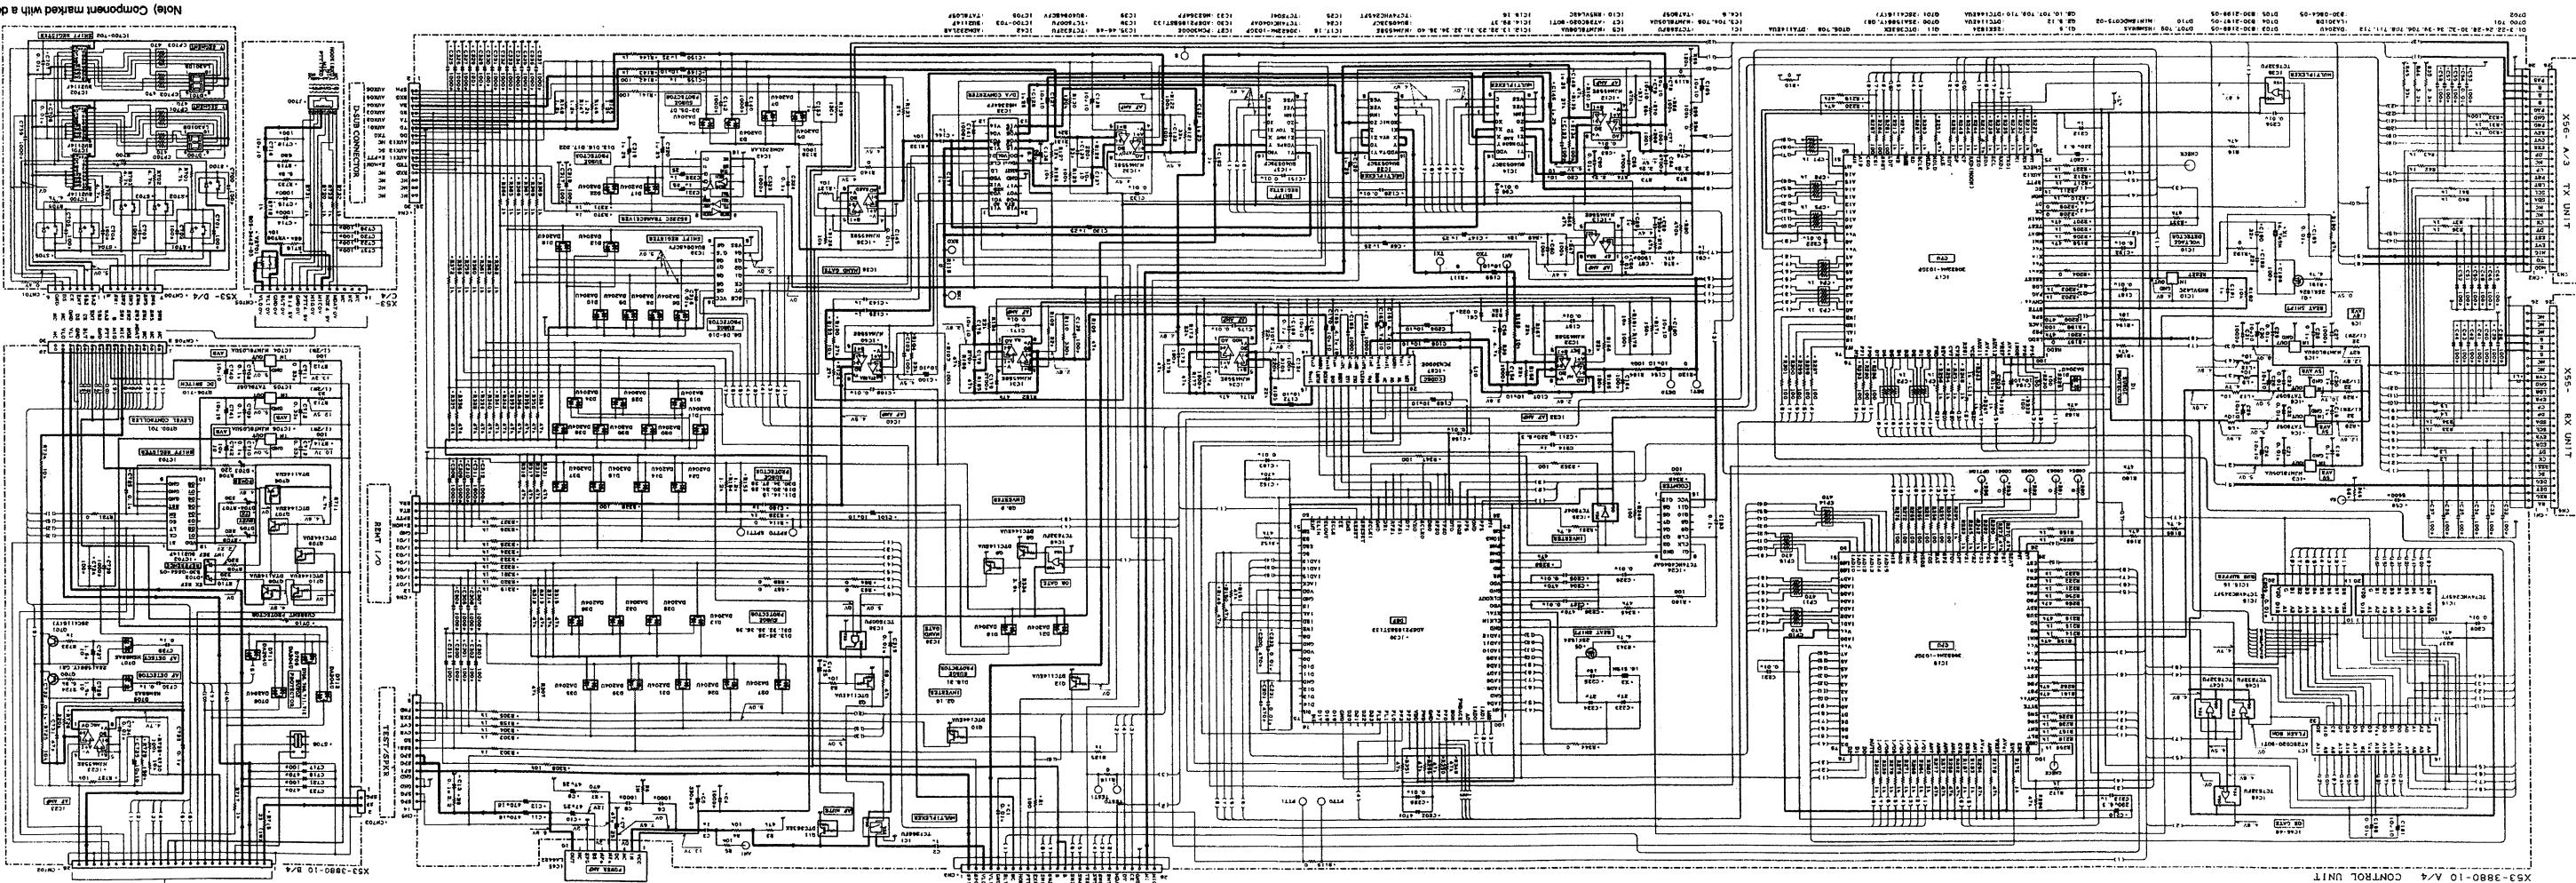


Schematic Diagram TKR-740


X56-3040-10 A/3 TX UNIT

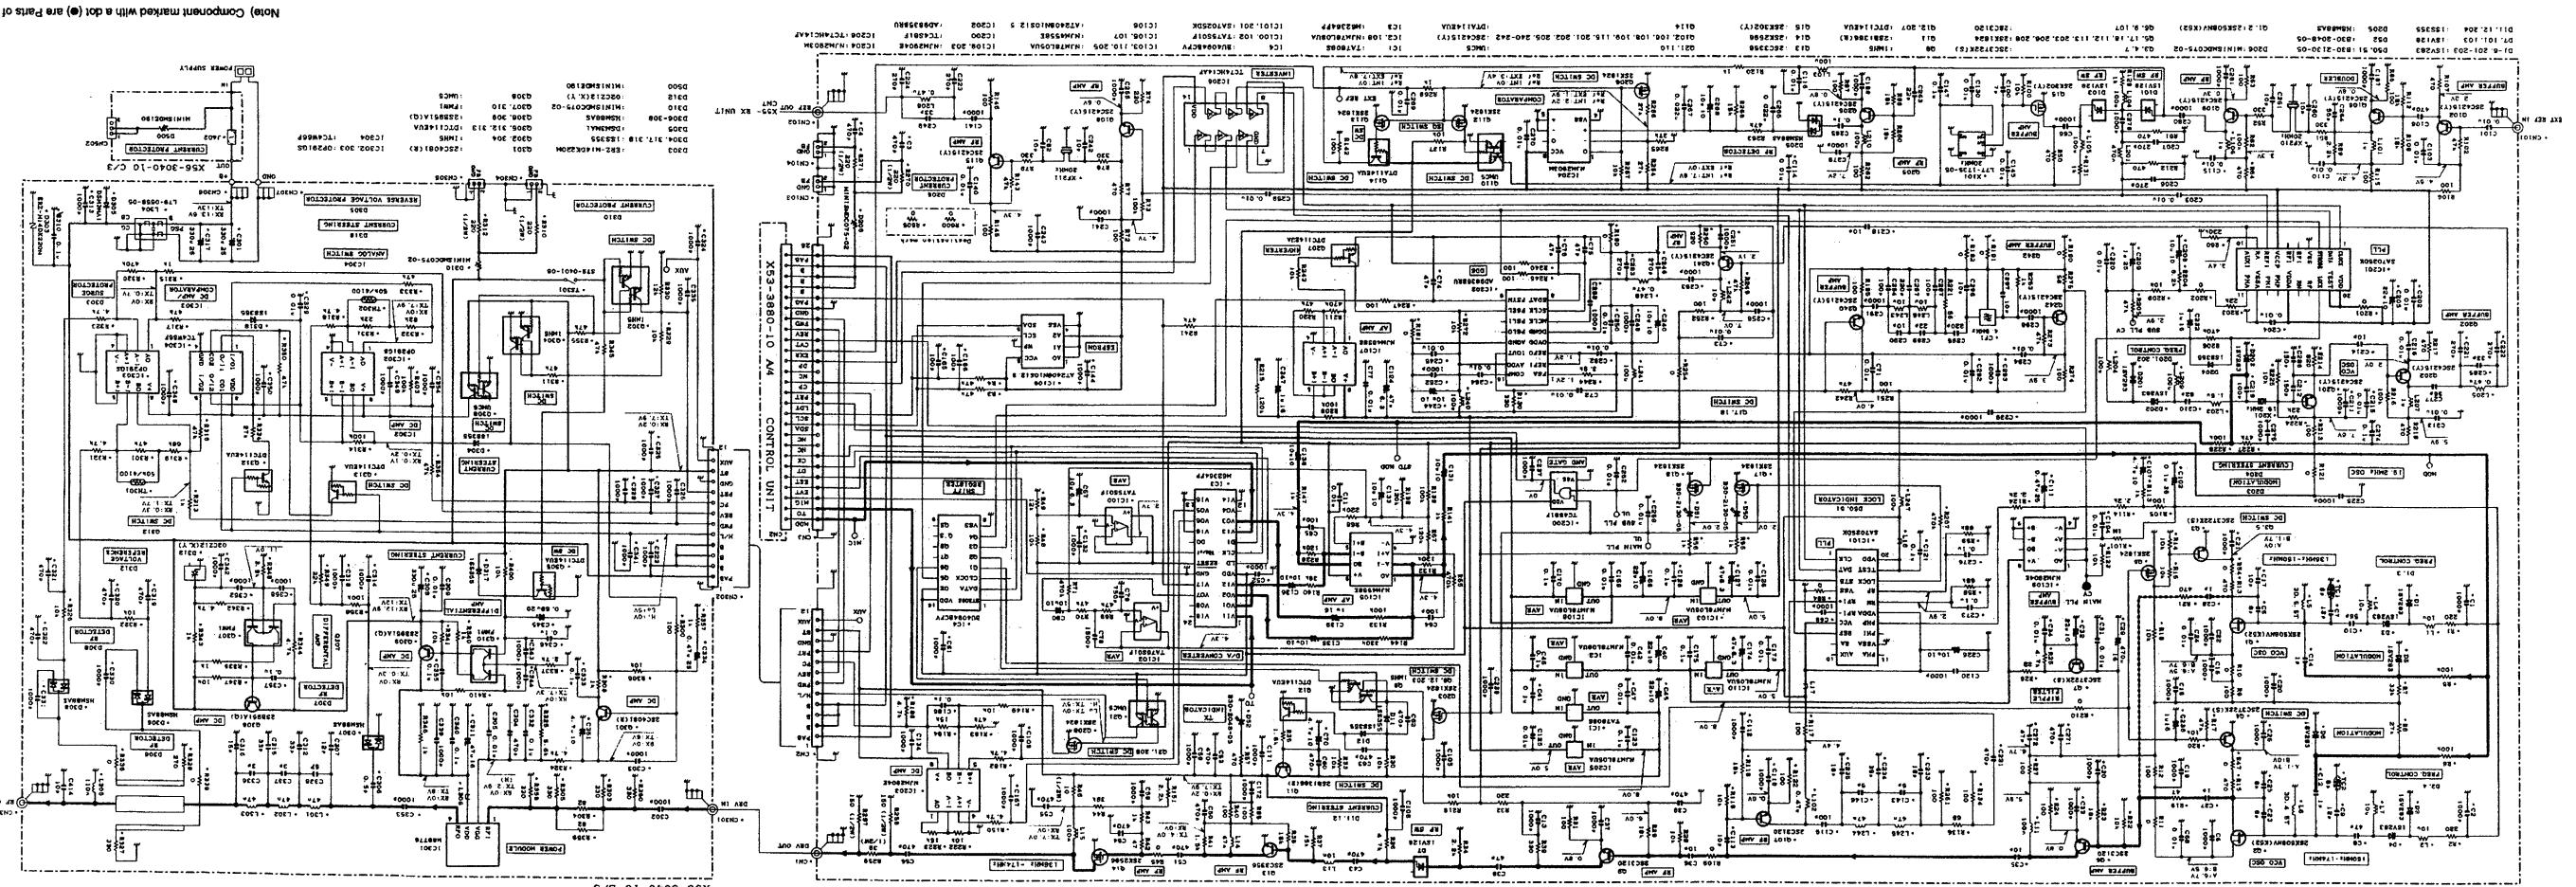

TKR-740 SCHEMATIC DIAGRA


Note) Component marked with a dot (●) are Parts of pattern 1

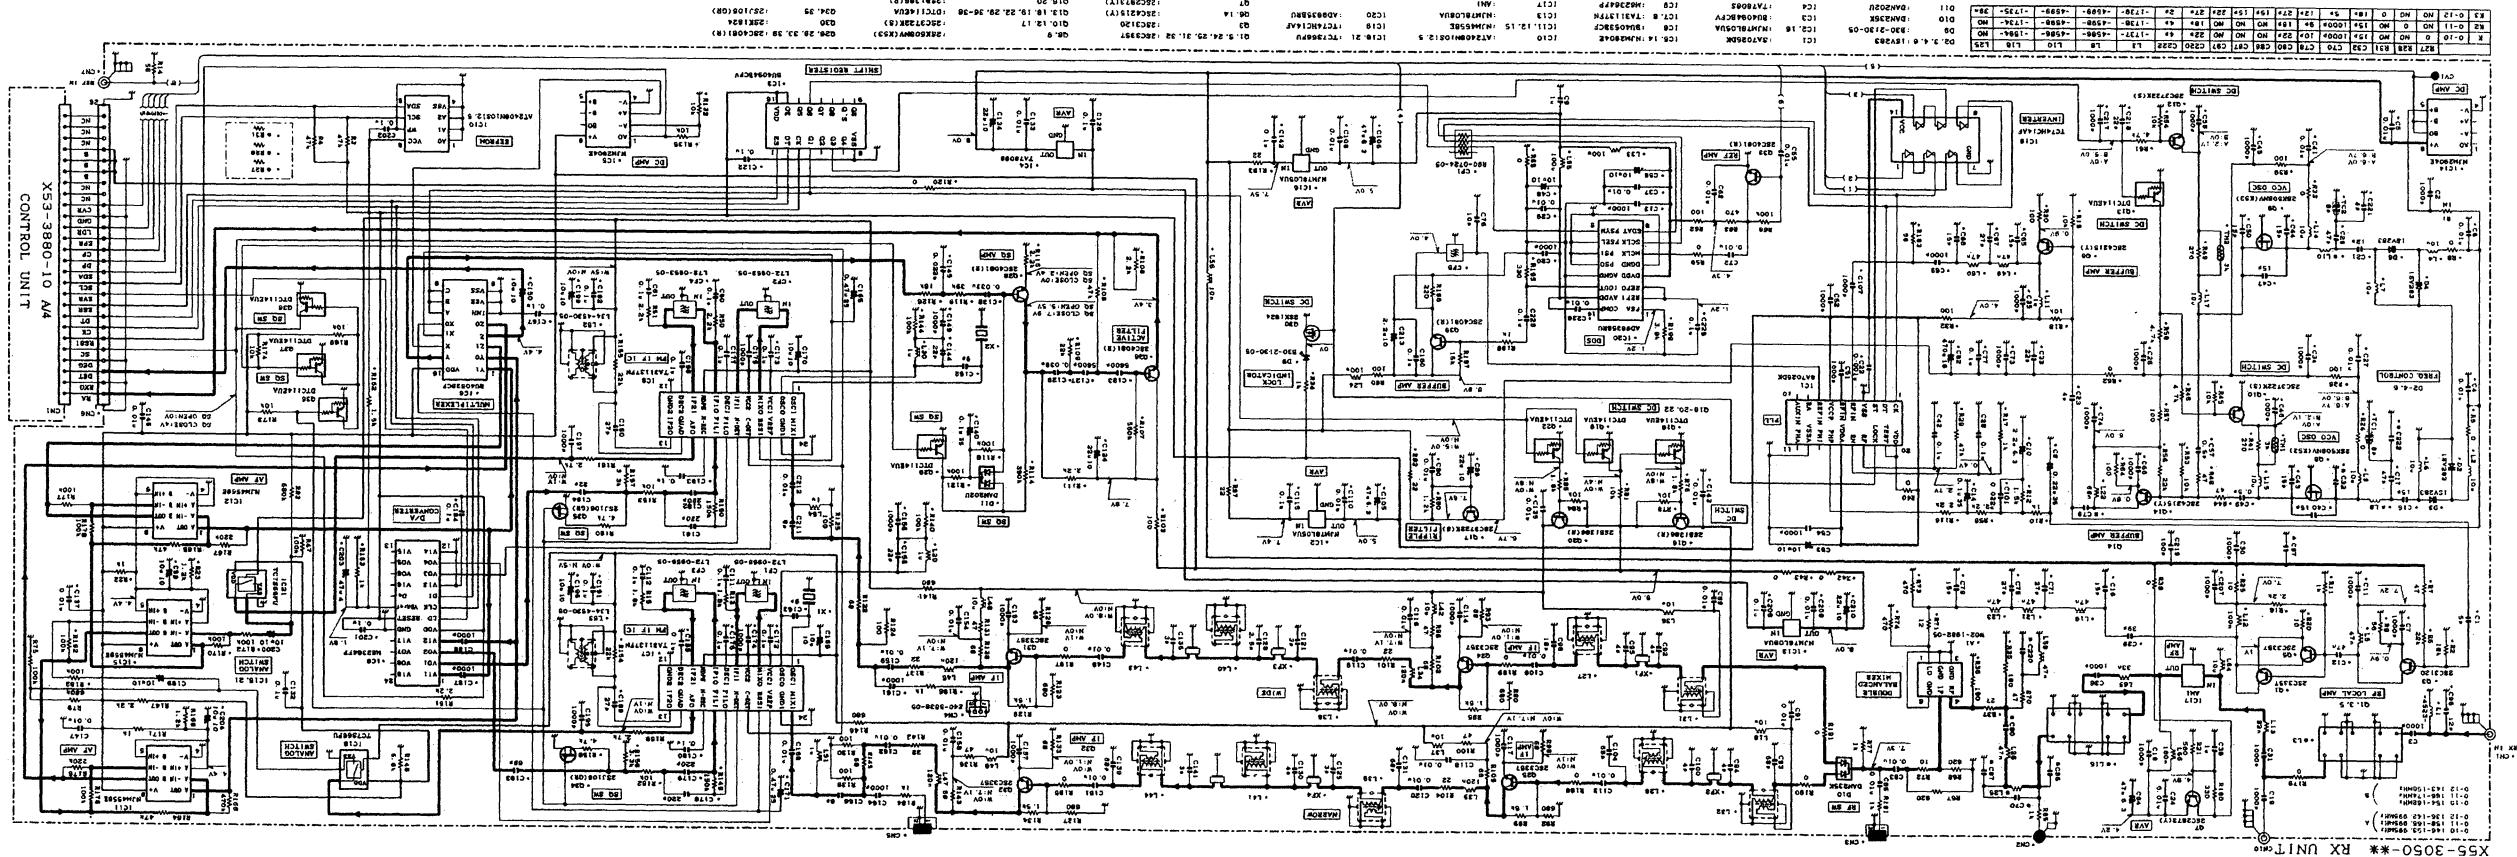


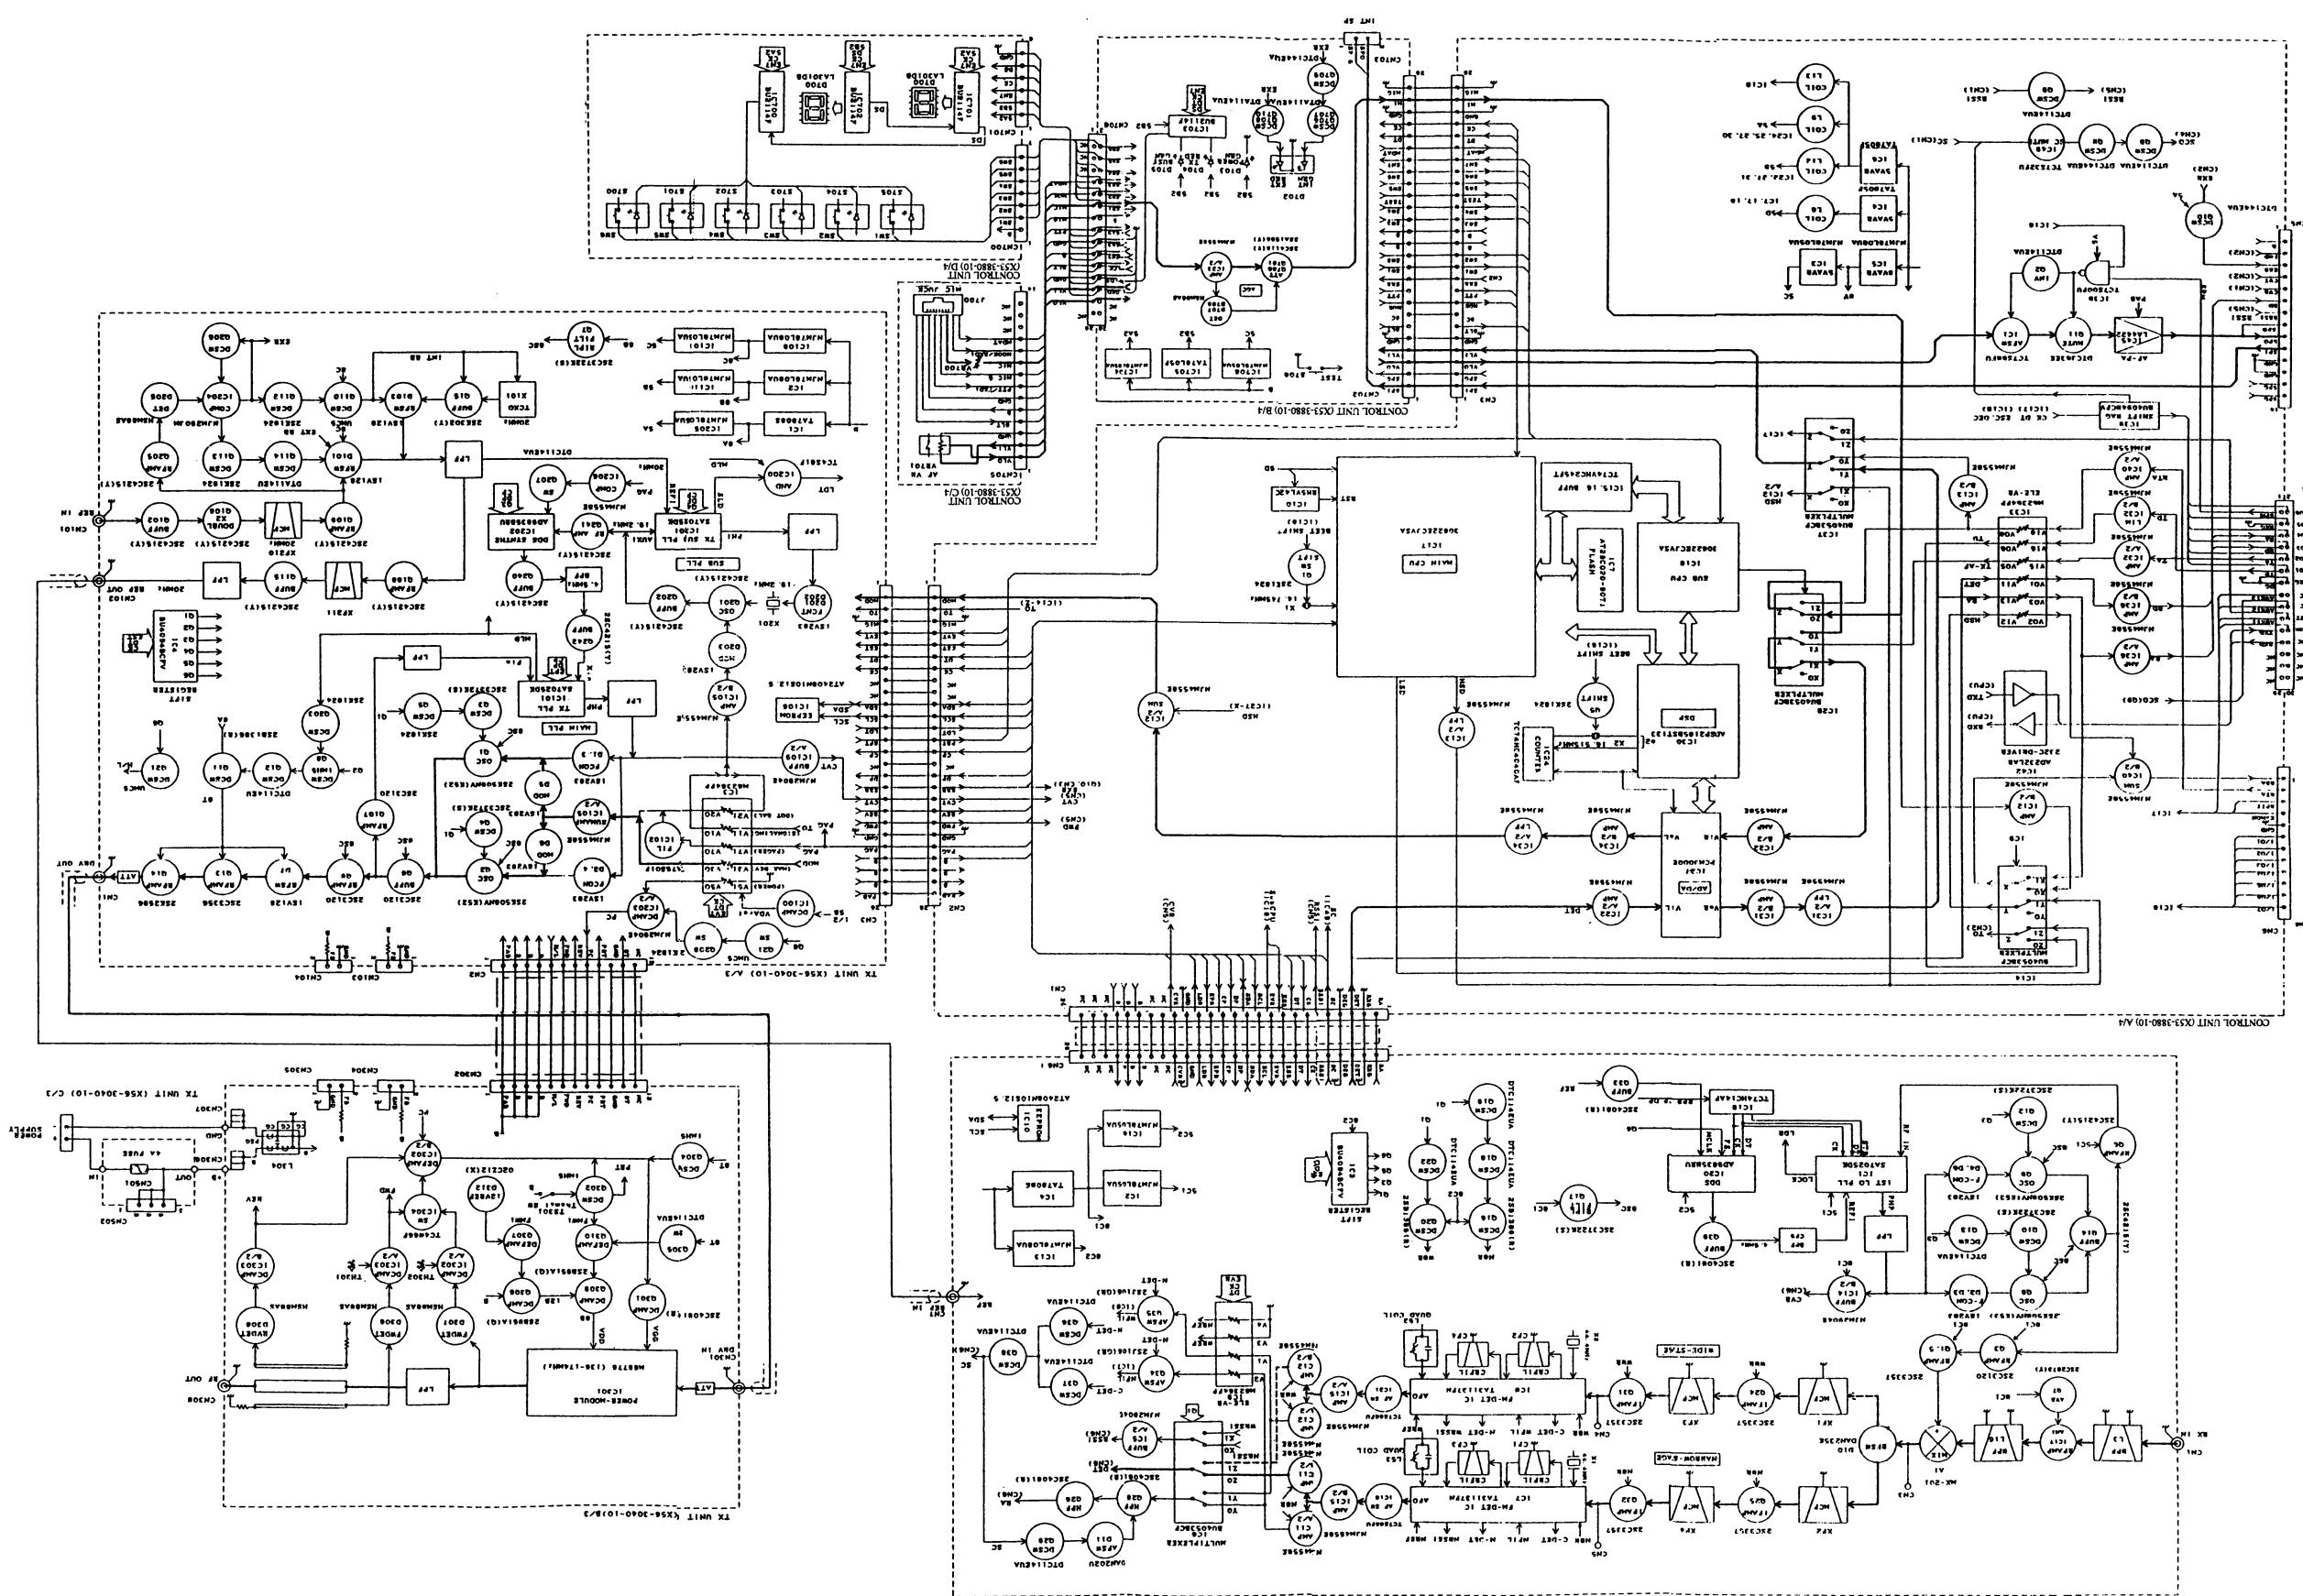


BLOCK DIAGRAM

TKR-740

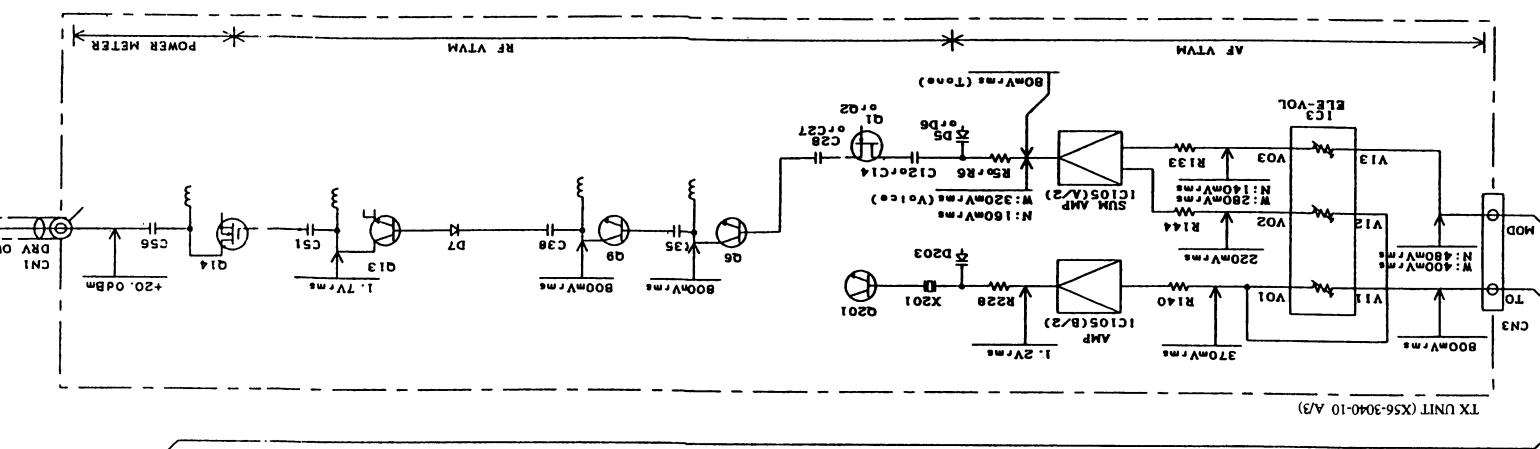


- Because the speech output terminal reaches 12dB SINAD when receiving high frequencies, you need an antenna input level (60% modulation).
- Even though the speech output terminal reaches 4W when receiving low frequencies, you need a 1kHz AF signal level.
- Even though the modulation reaches 60% when transmitting low frequencies, you need a 1kHz AF signal level.
- Measure the level of transmitted high frequencies directly from a special quality 50Ω impedance spec trum analyzer.

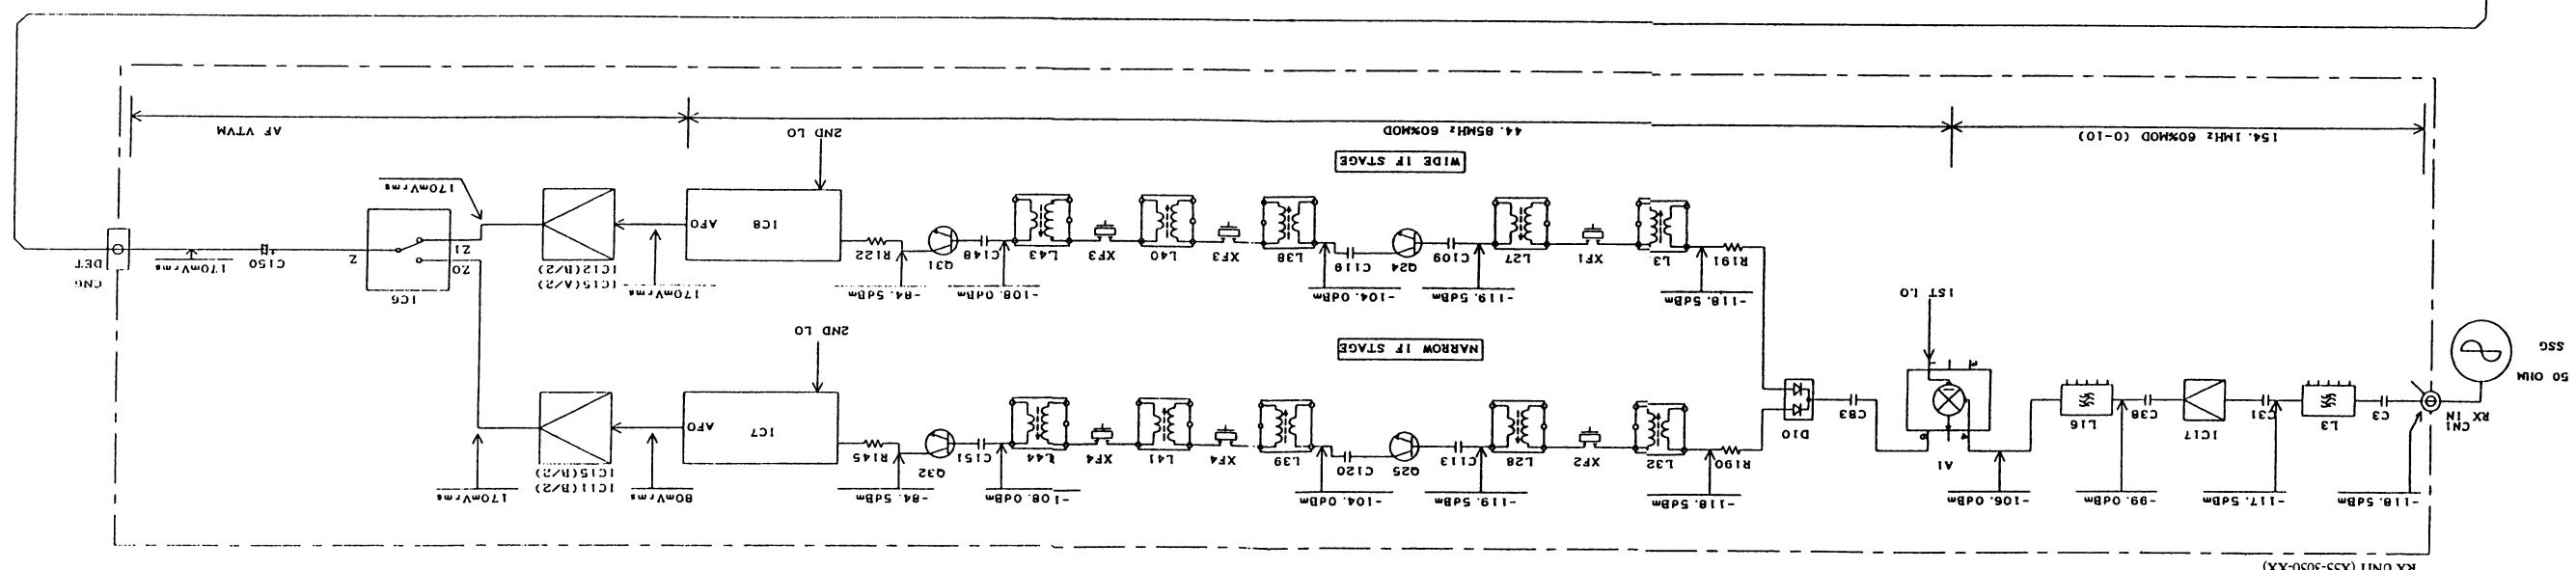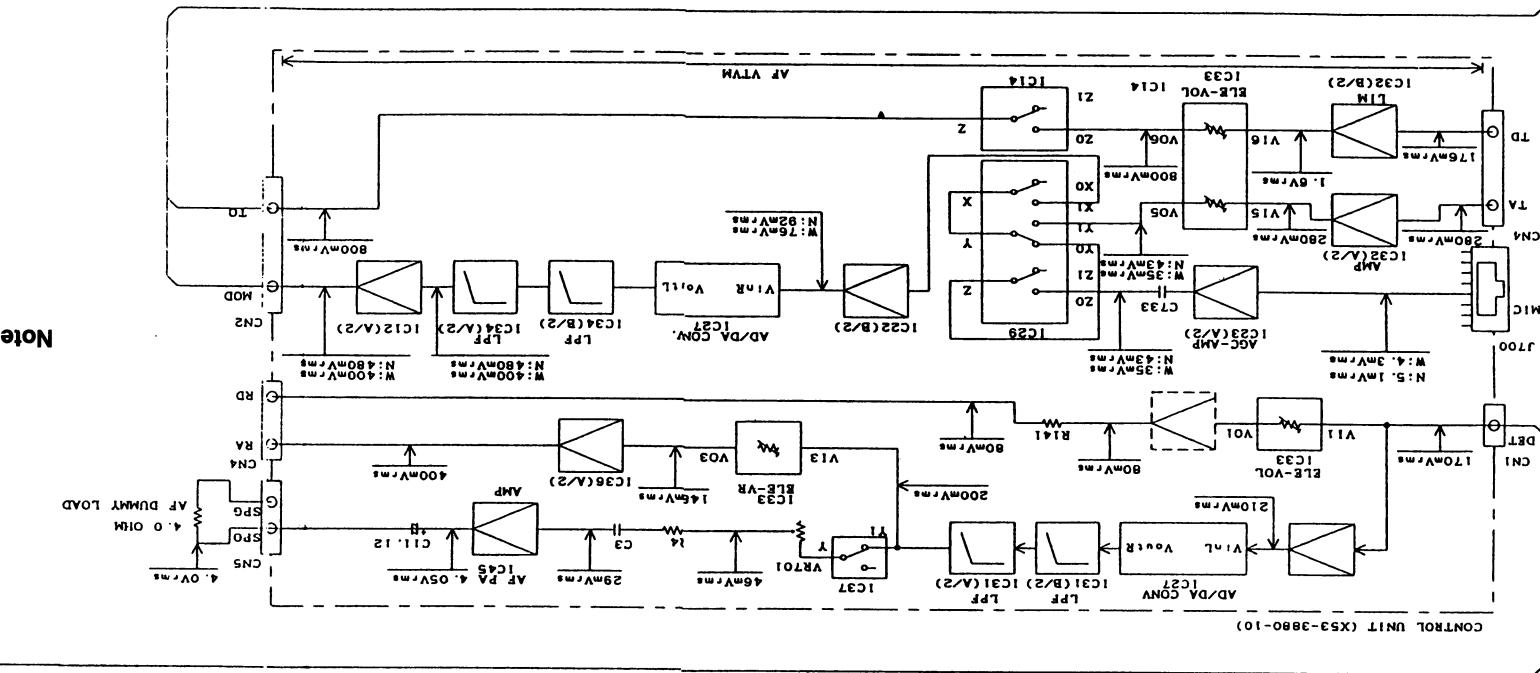

LEVEL DIAGRAM

TKR-740

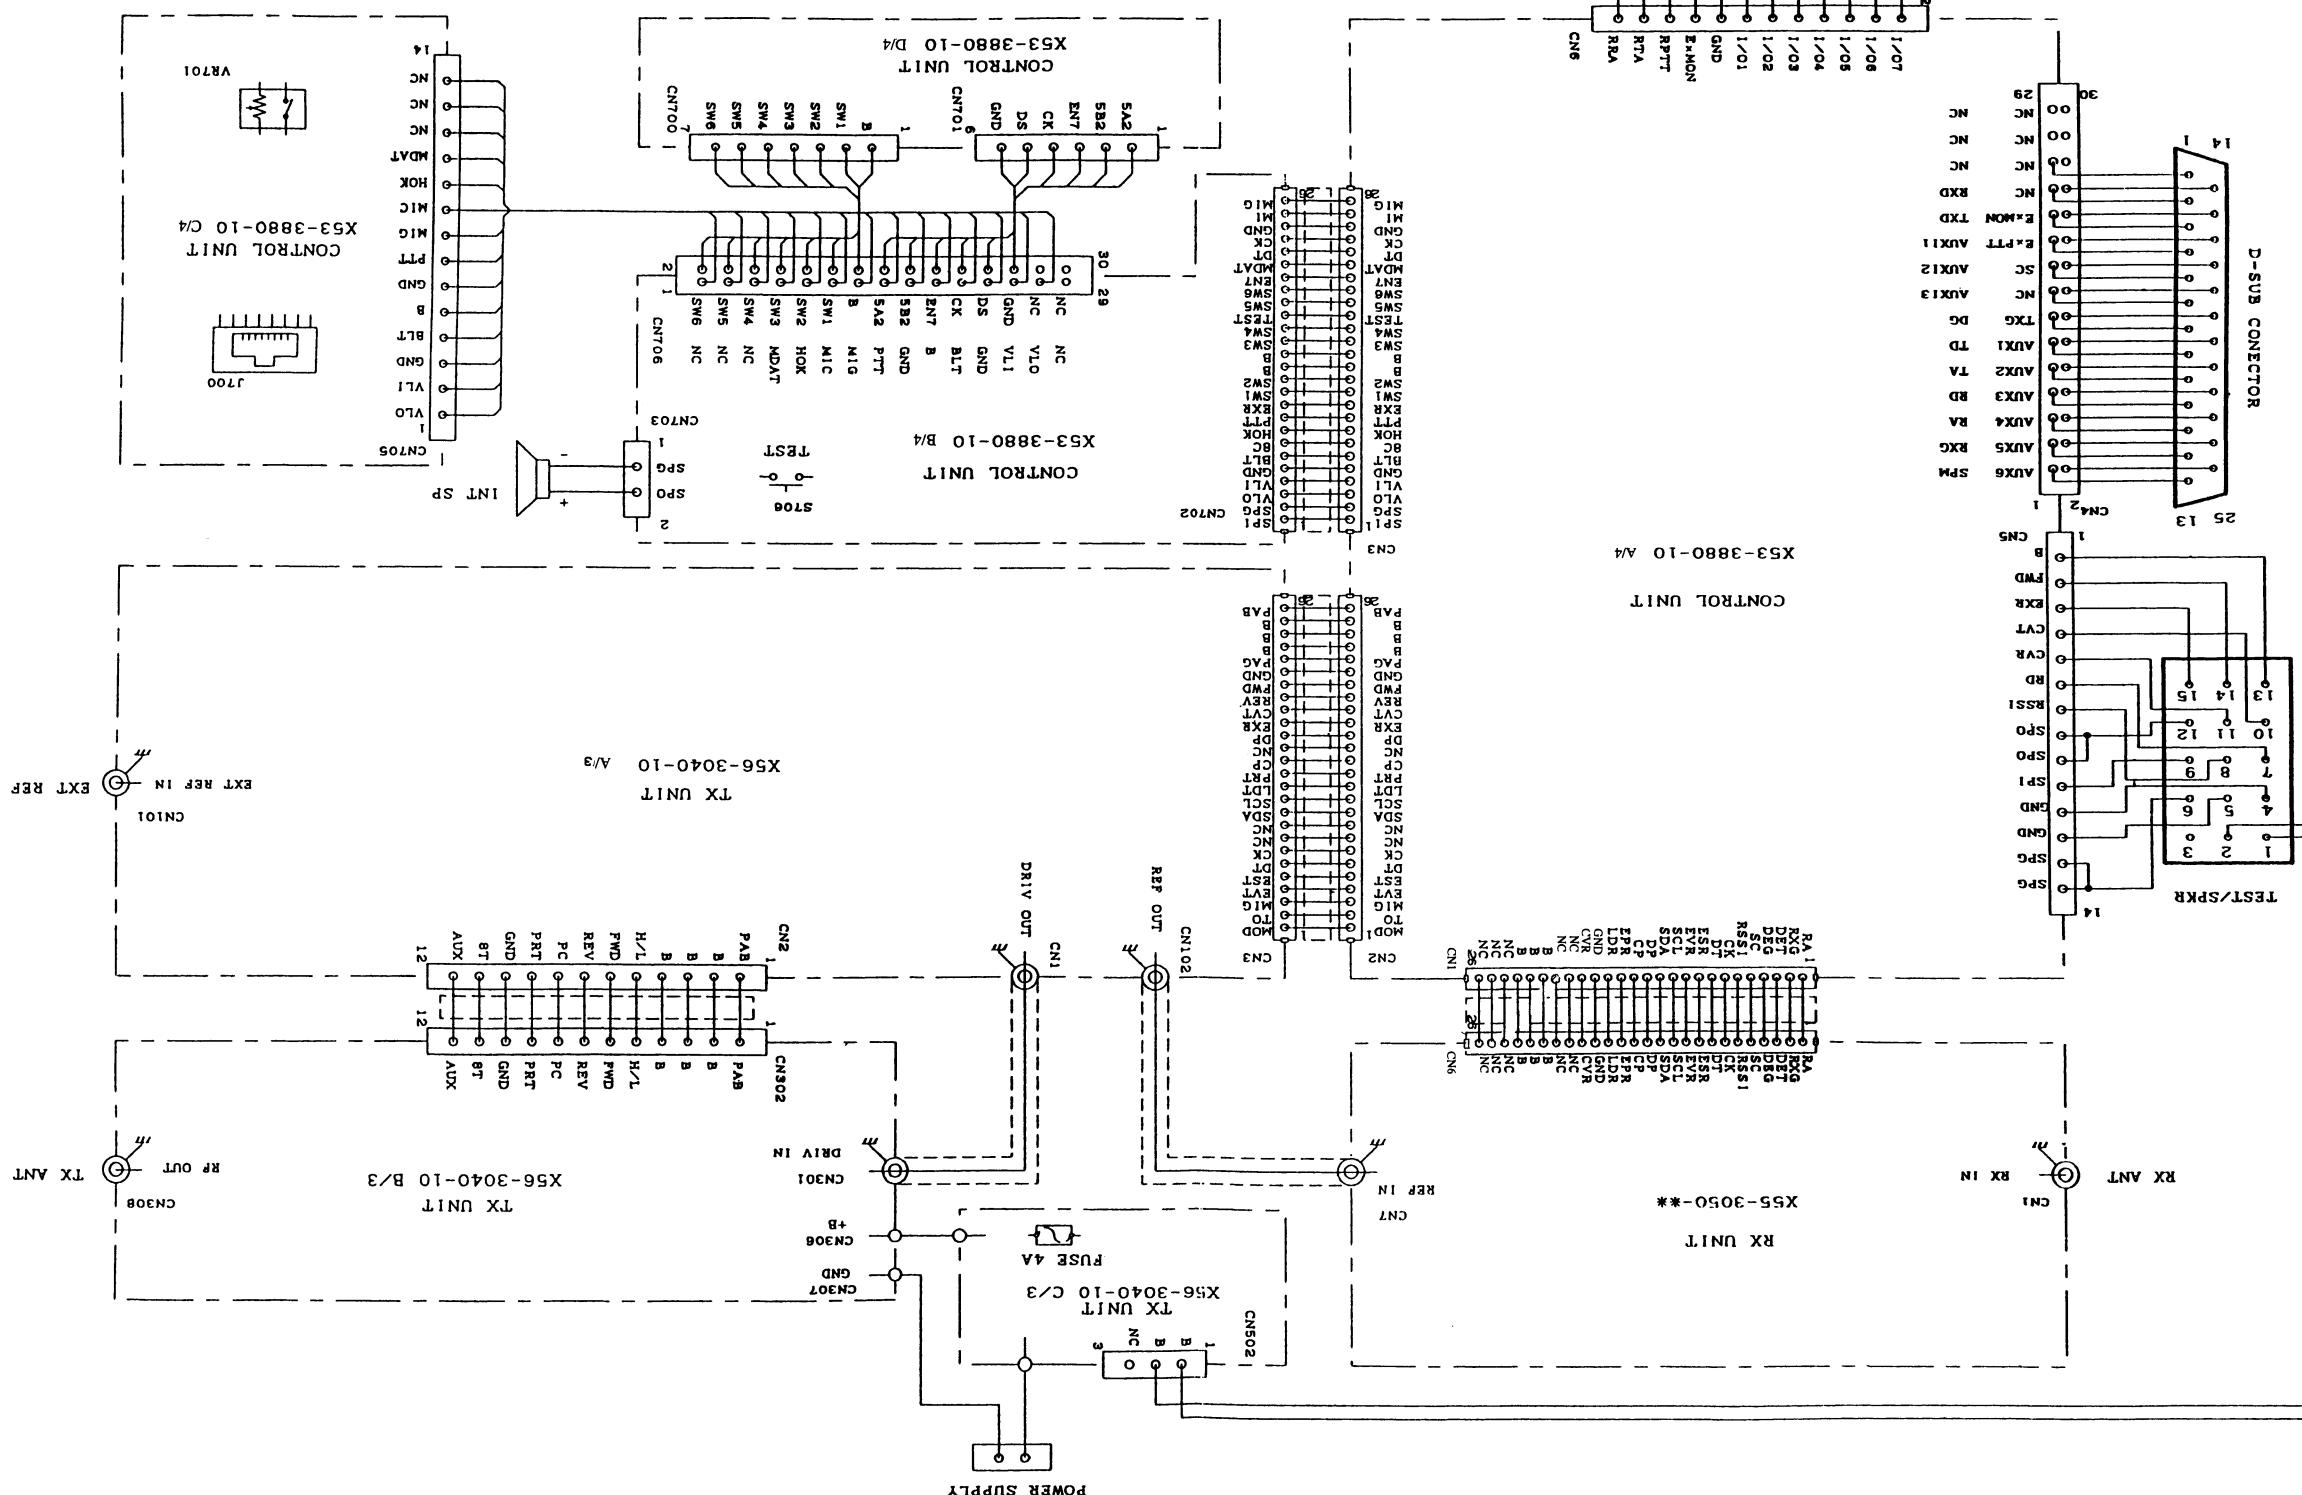

INTERCONNECTION DIAGRAM


TKR-740

TKR-740


KES-4 (EXTERNAL SPEAKER)

KPG-46 External view

KPG-46 (PROGRAMMING INTERFACE CABLE)

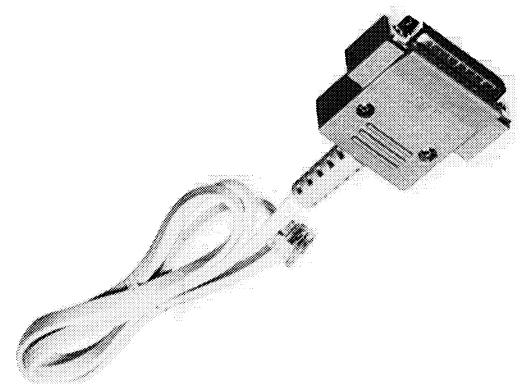

KES-4

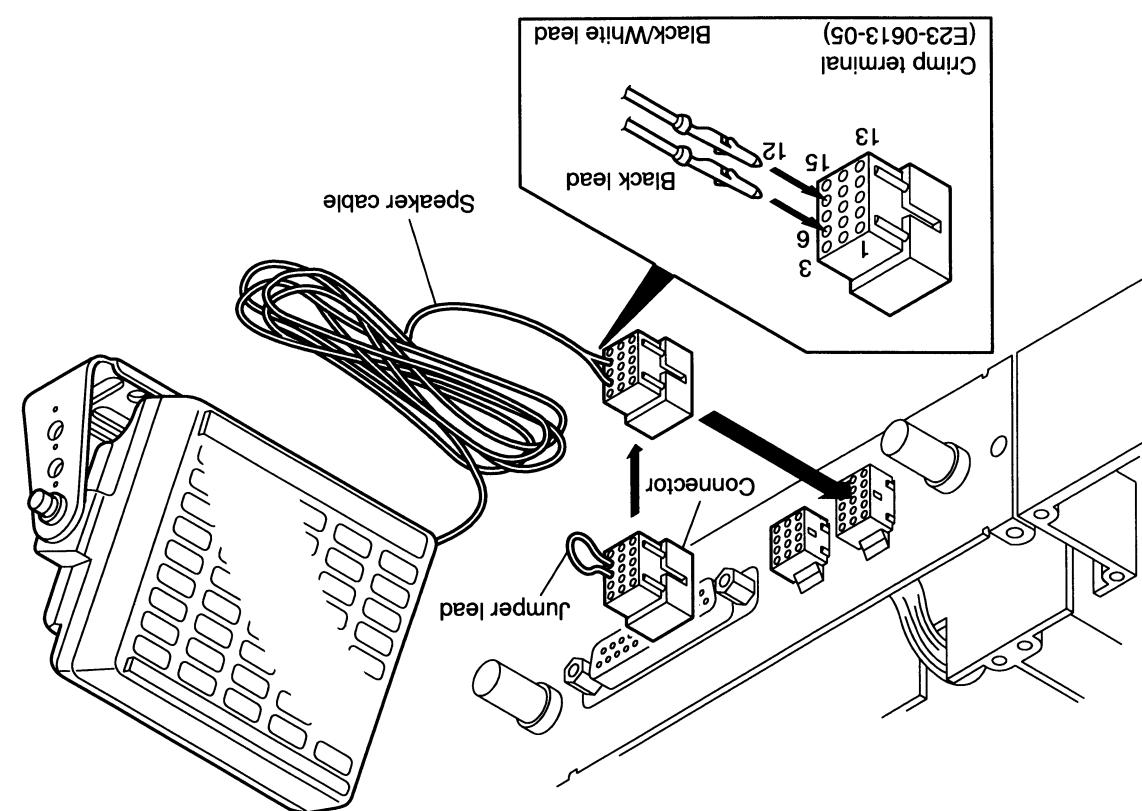

- When using an external speaker :
 - 1. Make sure the unit's power is turned OFF.
 - 2. When using the external speaker, remove the jumper lead from the connector, and attach the speaker cable.
 - 3. When not using the external speaker, replace the jumper lead and insert the connector into the speaker jack.

SPECIFICATIONS	
Specifications	KES-4
Speaker size	120mm
Maximum input power	20W
Impedance	4 ohms
Frequency response	100 to 5000 Hz
Dimensions(W X H X D,	127 X 127 X 65mm 5" X 5" X 2-9/16"
Weight	780g(1.72lbs)

projection not included

Dimensions not included

Weight
780g(1.72lbs)

Impedance

Frequency response

Dimensions(W X H X D,

Weight

MEMO

TKR-740

SPECIFICATIONS

General

Frequency range	RX : 146-162 MHz:K, 158-174 MHz:K2, 136-150 MHz:K3 TX : 136-174 MHz
Input volta	13.8V DC negative ground
Temperature range	-22°F to +140°F (-30°C to +60°C)
Frequency stability	±0.00015% (-22°F to +140°F)
Antenna impedance	50Ω
Channel Spacing	Wide : 30 kHz, Narrow : 15 kHz (PLL channel stepping 2.5kHz, 5 kHz, 6.25 kHz)
Channels quantity	32
Duty cycle	100%
Dimensions (including protrusions)	19 in (483mm) W X 1-3/4 in (44mm) H X 12 in (305mm) D
Weight	8.8 lbs. (4kg)

RECEIVER

Sensitivity (EIA 12dB SINAD)	0.30µV
Selectivity	Wide : 95dB at ±30kHz Narrow : 89dB at ±15kHz 87dB at ±12.5kHz
Channel Frequency Spread	3 MHz
Spurious and image rejection	100 dB
Intermodulation	Wide : 90dB at ±30kHz/±60kHz Narrow : 85dB at ±15kHz/±30kHz
FM Hum and Noise	Wide : 60dB, Narrow : 55dB

TRANSMITTER

RF power output.....	5W
Channel Frequency Spread	38MHz
Type of Emiss	11K0F3E, 16K0F3E
Audio distortion	Less than 0.5% at 1000Hz
Spurious and emission	70dB
FM Noise	Wide : 55dB, Narrow : 50dB

KENWOOD follows a policy of continuous advancement in development. For this reason specifications may be changed without notice.

KENWOOD CORPORATION

14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150-8501, Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez Street, Long Beach, CA 90801-5745,
U.S.A.

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55-2791 Piso 6 Plaza Chase Cl, 47 y Aquilino de la Guardia Panama,
Republic of Panama

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS BELGIUM N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS FRANCE S.A.

13, Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herst., WD1 8EB United Kingdom

KENWOOD ELECTRONICS EUROPE B.V.

Amsterdamseweg 37, 1422 AC Uithoorn, The Netherlands

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

KENWOOD IBERICA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001 499 074)

16 Giffnock Avenue, North Ryde, N.S.W. 2113, Australia

KENWOOD ELECTRONICS (HONG KONG) LTD.

Unit 3712-3724, Level 37, Tower one Metroplaza, 223 Hing Fong Road, Kwai Fong,
N.T., Hong Kong

KENWOOD ELECTRONICS TECHNOLOGIES(S) PTE LTD.

Sales Marketing Division

1 Ang Mo Kio Street 63, Singapore 569110