



DO NOT SCALE

BATTERY G1 TO BE HAND FITTED AFTER FLOW SOLDERING.

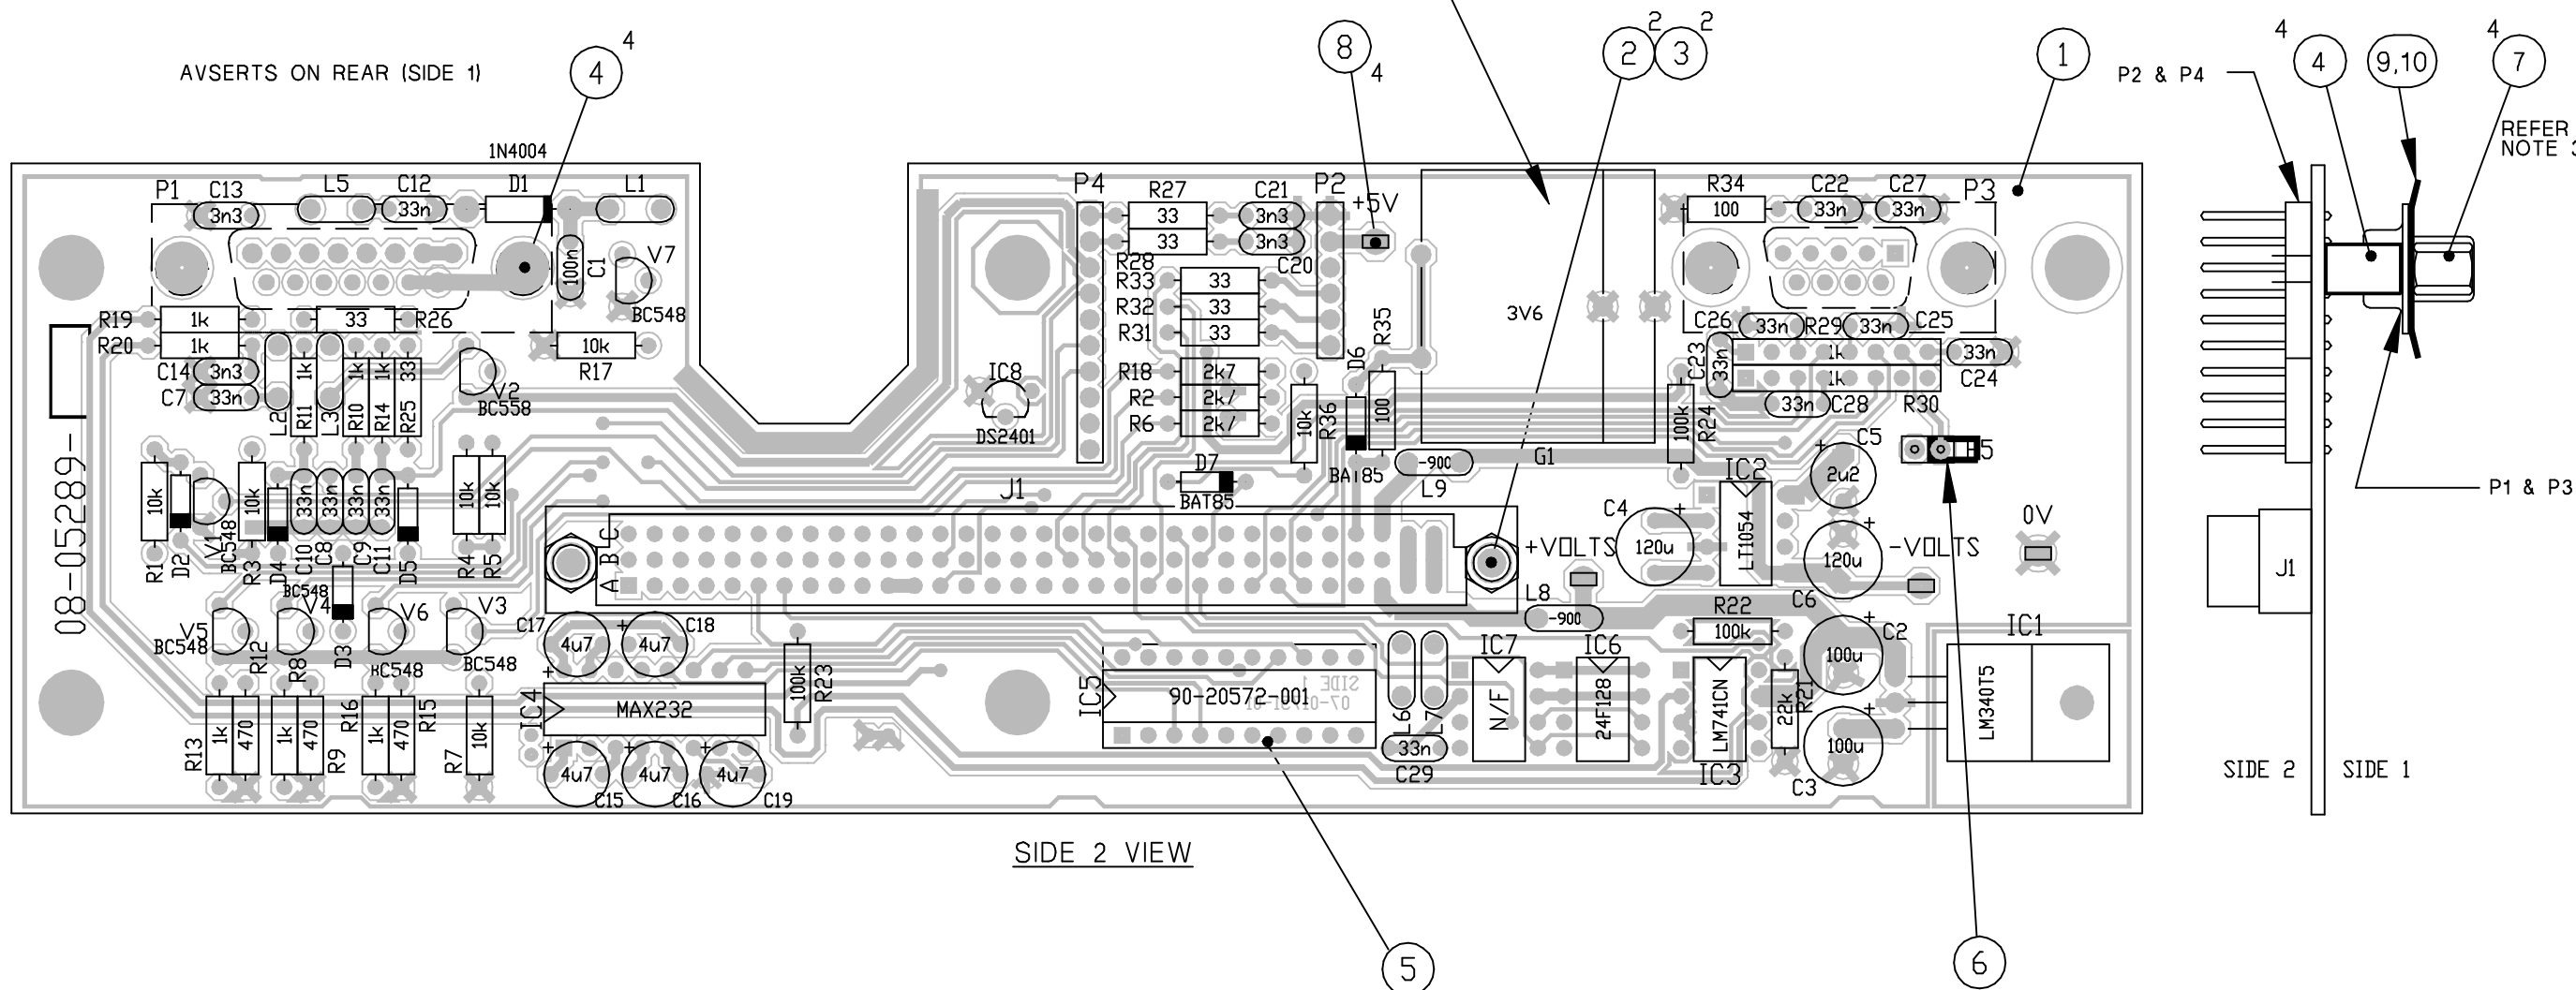

AVSERTS ON REAR (SIDE 1)

SIDE 2 VIEW

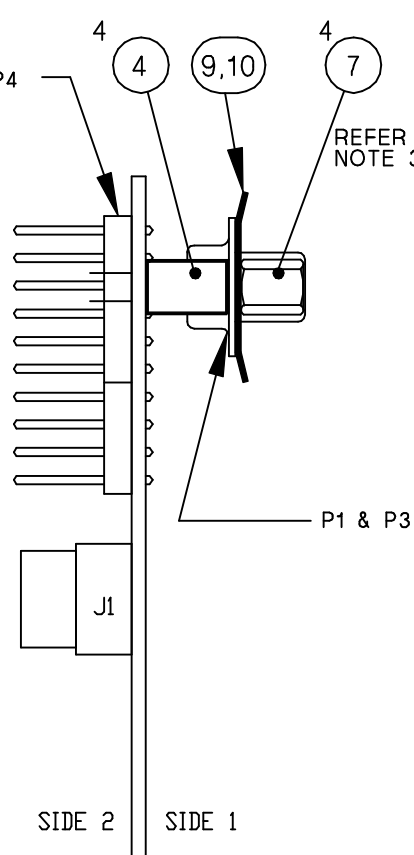

- NOTES:
1. ALL DIODES ARE BAW62 OR EQUIVALENT UNLESS OTHERWISE STATED.
 2. ALL INDUCTORS ARE 43-90002 UNLESS OTHERWISE STATED.
 3. ADD LOCTITE 242 BLUE TO THREAD OF LOCKING SCREWS (ITEM 7) BEFORE ASSEMBLY.

PCB: 07-01751-01
ASSY P/No. 08-05289-001

ISSUE B
C29, L6 - L9
ADDED.
C/R 24962
03-04-97 CAH

ISSUE C
ITEM 6 MOVED.
C15 - C19 WERE
1uF.
PCB WAS ISS B.
C/R 25001
29-04-97 CAH

ISSUE 2
NOTE ADDED TO
ITEM 5 AND G1.
C/R 25210
18-12-97 CAH

ISSUE 3:
C/R 25390
C4 & C6 WERE 100u
TAGS.
POLARITY SIGNS
ADDED TO C2 - C6,
C15 - C19.
CE 5 AUG 98

ISSUE 4
GASKETS (ITEMS 9&10)
ADDED.
C/R 26070
21-5-99 AJC

ISSUE 5
NOTE AT REF (5)
DELETED.
C/R 26624
30-6-2000 HJK

FILE No.
08\05289_5.DWG

	SCALE 2:1		© CODAN PTY LTD, A.C.N. 007 590 605: 1997 TITLE USER CONNECTOR PCB ASSEMBLY
	DRN	AML	
MATERIAL	CHKD	CAH	11-03-97
	APPD	CAH	24-04-97
FINISH	TOLERANCES UNLESS OTHERWISE STATED		DRAWING/DOC NO. 08-05289
	2 PLACES DEC.	±0.25	
	1 PLACE DEC.	±0.5	ISS 5
	0 PLACE DEC.	±1	
	ANGULAR	±2°	SHT. 1 OF 1

DIMENSIONS IN mm