


DO NOT SCALE

NOTES:

1. REMOVE 4 SCREWS SECURING CONSOLE TOP TO CHASSIS. DISCONNECT WIRING FROM CONNECTORS P1 AND P7 ON AUDIO PROCESSING PCB, P3 ON MICRO-CONTROLLER AND DISPLAY PCB AND INTERCONNECTING EARTHING WIRE ENABLING TOP COVER TO BE SEPARATED FROM CHASSIS.
2. REMOVE 8 SCREWS SECURING AUDIO PROCESSING PCB ASSEMBLY TO CHASSIS. REMOVE PCB.
3. INSERT REMOTE CONTROL FILTER PCB ASSEMBLY 08-03127 INTO PCB HOLES IN TOP RIGHT HAND CORNER OF AUDIO PROCESSING PCB ASSEMBLY, SO THAT COMPONENT SIDE OF ASSEMBLY IS ORIENTED TOWARDS COMPONENTS ON OTHER ASSEMBLY. SOLDER IN PLACE.
4. REMOVE BLANKING PLATE COVERING OPTION "R" SOCKET ON REAR OF CONSOLE AND FIX 15 WAY "D" CONNECTOR ON LOOM CABLE 08-03170 TO REAR OF CONSOLE USING SCREW LOCK ASSEMBLIES PROVIDED. (SCREW LOCKS SHOULD BE FITTED TO OUTSIDE OF CONSOLE).
5. CONNECT END OF LOOM CABLE ASSEMBLY TO REMOTE CONTROL FILTER PCB ENSURING RED LINE IS NEAREST TO RIGHT HAND SIDE OF ASSEMBLY (ADJACENT TO P501 ON SILK SCREEN).
6. REPLACE 8 SCREWS SECURING AUDIO PROCESSING PCB ASSEMBLY TO CHASSIS.
7. REPLACE CABLES FROM MICRO-CONTROLLER AND DISPLAY PCB. SECURE CONSOLE TOP TO CHASSIS WITH 4 SCREWS.

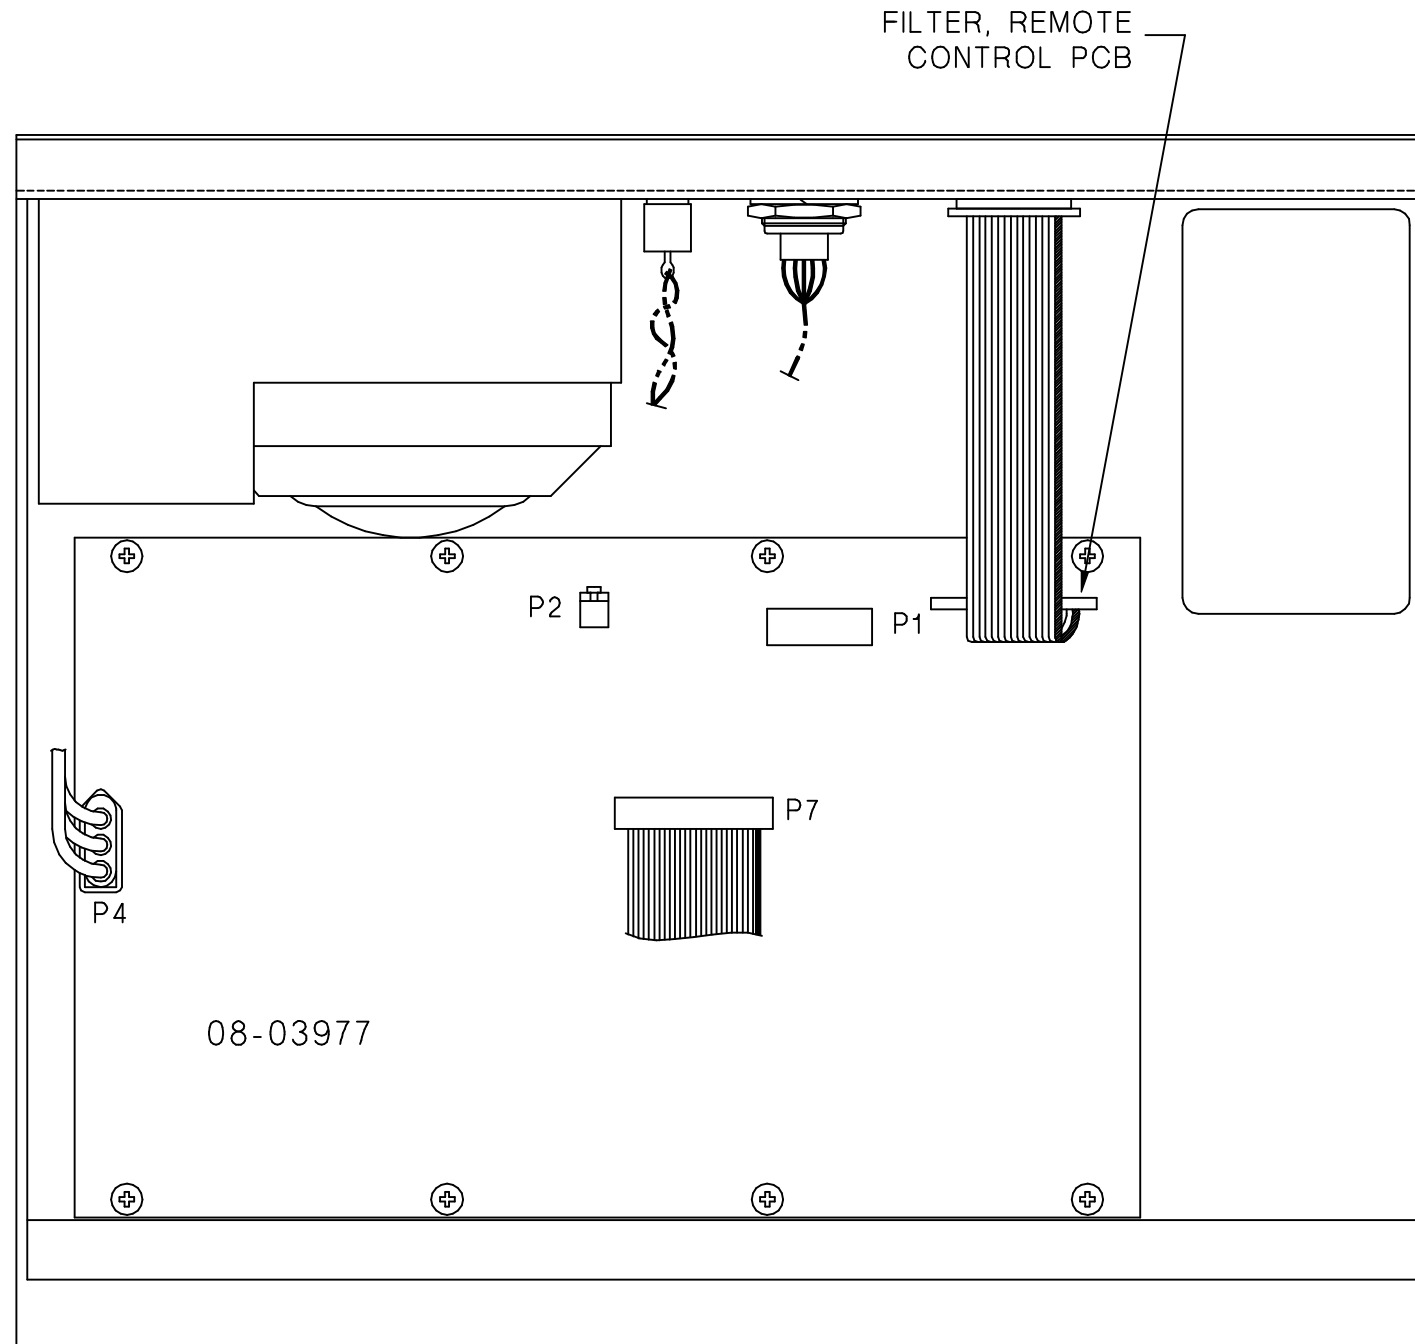

PARTSLIST

ITEM	PART No.	DESCRIPTION
-	15-10377-001	FITTING INSTRUCTIONS
-	08-03127	FILTER, REMOTE CONTROL PCB
-	08-03170	CABLE, RIBBON 15 WAY 165mm
-	60-91509-001	SCREW LOCK ASSY, "D" 8.0mm STUD

FILE No.
15\10377_1.DWG

			SCALE NTS	© CODAN PTY LTD, A.C.N. 007 590 605: 2000	
	DRN	APJ	DATE 4-9-91	TITLE OPTION R	
	CHKD	AMJ	6-9-91	FITTING INSTRUCTIONS, 8570	
MATERIAL	APPD	NJA	12-11-91	DRAWING/DOC NO.	
FINISH	TOLERANCES UNLESS OTHERWISE STATED			A3 15-10377-001	
	2 PLACES DEC.			ISS	SHT. 1
	1 PLACE DEC. ±0.5				
0 PLACE DEC. ±1			1	OF 1	

DIMENSIONS IN mm