

4 T856/857 Functional Testing

The following test procedures will confirm that the T856/857 has been tuned and adjusted correctly and is fully operational.

Refer to Figure 3.2 for the test equipment set-up.

Note: In this and following sections deviation settings are given first for wide band sets, followed by settings in brackets for narrow band [] and T856 Ultra-wide band sets.

Refer to Section 6 where the parts lists, grid reference index and diagrams will provide detailed information on identifying and locating components and test points on the main PCB. The parts lists and diagrams for the memory and VCO PCBs are in Part E.

The following topics are covered in this section.

Section	Title	Page
4.1	Current Consumption	4.3
4.2	Output Power	4.3
4.3	Output Frequency	4.3
4.4	Tail Timer	4.3
4.5	Transmit Timer	4.4
4.6	Frequency Response	4.4
4.7	Audio Level Input Sensitivity	4.6

Figure	Title	Page
4.1	T856/857 Pre-emphasis Response	4.5
4.2	T856/857 Limiting Response	4.5

4.1 Current Consumption

Connect the T856/857 to a 13.8V power supply.

Connect an RF power meter to the T856/857 output socket.

Check that the current in the 13.8V power cable is less than 120mA.

Key the T856/857 (the "Carrier On" LED should light).

Check that the current is as follows:

T856	<5.5A
T857	<750mA.

4.2 Output Power

Connect an RF power meter to the T856/857 output socket.

Key the T856/857.

Check that:

T856	the output power adjusts to 25W
T857	the output power is 1W \pm 300mW.

4.3 Output Frequency

Connect the T856/857 output to a frequency counter via an attenuator pad:

T856	40dB pad
T857	20dB pad.

Measure the output frequency and, if necessary, adjust the TCXO (=IC1) to trim to the nominal frequency (\pm 100Hz).

4.4 Tail Timer

Adjust RV202 fully anticlockwise.

Connect the key line to earth, then disconnect, and check that the T856/857 remains on for at least 3 seconds.

Reset RV202 fully clockwise.

Connect the key line to earth, then disconnect, ensuring that the T856/857 turns

off immediately the key line is broken.

Set RV202 for the required tail time.

4.5 Transmit Timer

Select the Tx timer by linking pins 1-2 of PL201.

Adjust RV201 fully anticlockwise.

Earth the key line.

Check that the T856/857 turns off after approximately 1 minute.

Adjust RV201 fully clockwise.

Earth the key line.

Check that the T856/857 turns off after approximately 3 minutes.

Set RV201 for the required transmit time.

4.6 Frequency Response

If the T856/857 has been correctly adjusted, the pre-emphasis and limiting responses should closely match those shown in Figure 4.1 and Figure 4.2 respectively.

Note 1: The limits shown on these graphs should not be exceeded.

Note 2: The curves are shown for wide band sets.

- Measure the pre-emphasis response as follows:
 - Reduce the line level to give 1kHz [0.5kHz] deviation at 1kHz.
 - Sweep the modulation frequency.
 - The response should closely match that shown in Figure 4.1.
- Measure the limiting response as follows:
 - Set the line level to give 3kHz [1.5kHz] deviation at 1kHz.
 - Increase the line level 20dB and sweep the modulation frequency.
 - The response should closely match that shown in Figure 4.2.

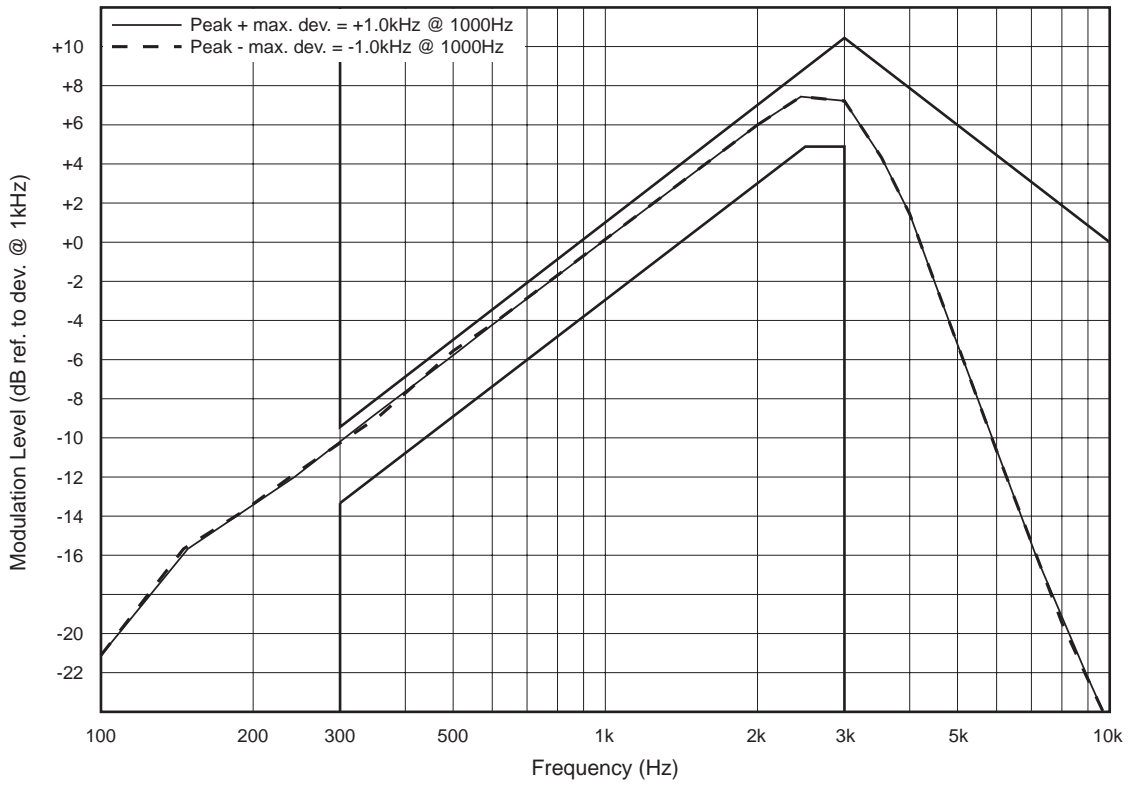


Figure 4.1 T856/857 Pre-emphasis Response

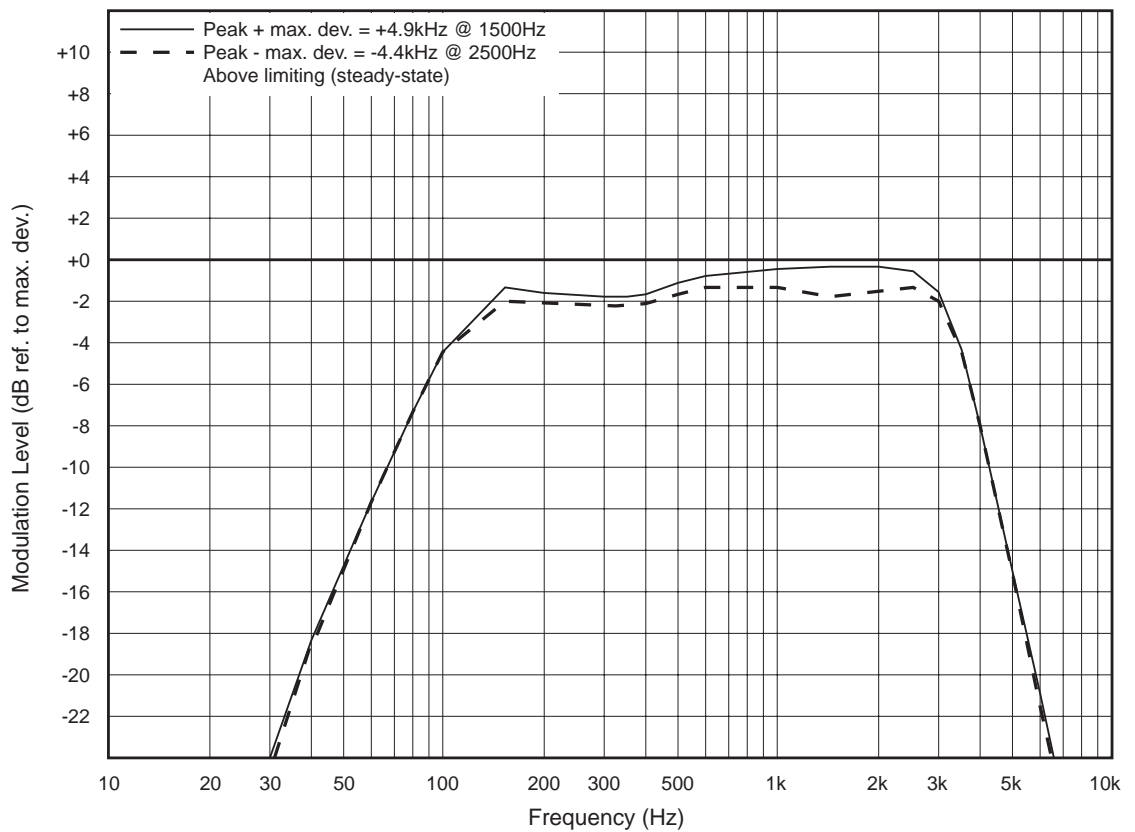


Figure 4.2 T856/857 Limiting Response

4.7 Audio Level Input Sensitivity

- Adjust RV100 (line sensitivity) fully clockwise.
- Check that the input sensitivities are better than those specified below:

Line Input	600 ohms, 3kHz [1.5kHz] (6kHz) deviation at 1kHz: with compressor -50dBm without compressor -30dBm
Microphone Input	600 ohms, 3kHz [1.5kHz] (6kHz) deviation at 1kHz: with compressor -75dBm without compressor -55dBm
CTCSS Input	1kHz deviation at 150Hz 500mV rms

Note: A degraded signal to noise ratio can be expected with the compressor selected. The extent of the degradation is dependent on the audio input level.